



### Features

- Integral flange.
- Comfort Depth® design offers a 19" (483 mm) step-over height.
- Left drain.
- Slotted overflow for deep soaking.
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Integral lumbar support and armrests for comfort.
- Coordinates with other products in the Archer® collection.
- 60" (1524 mm) x 32" (813 mm) x 21-1/4" (514 mm)

### Material

- Acrylic

### Hydrotherapy

- Single-speed whirlpool offers eight fully adjustable hydro-massage jets for water flow and direction.

### Installation

- Alcove

### Required Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

### Recommended Accessories

K-24916 Wireless Music Kit



ADA

### Codes/Standards

ASME A112.19.7/CSA B45.10

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

UL 1795

Greenguard UL 2818 - Gold

ADA


### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.



### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

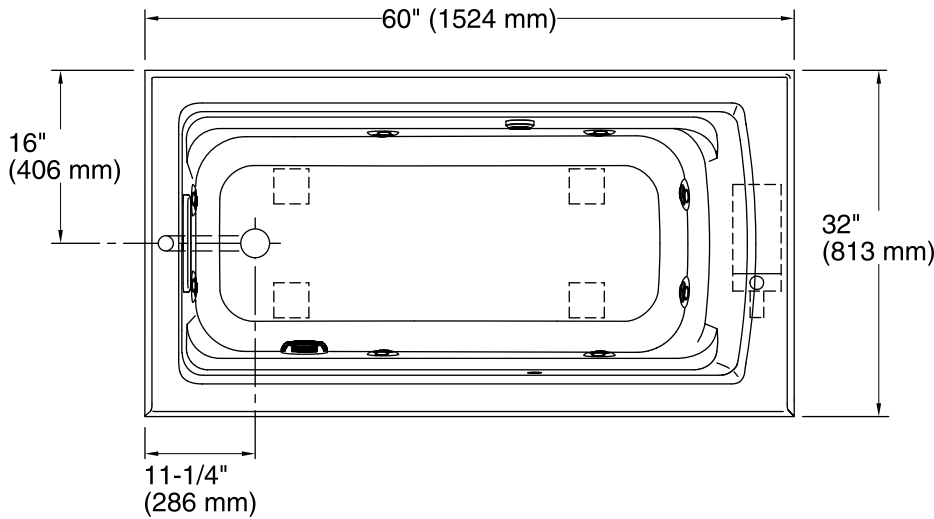

No change in measurements if connected with drain illustrated. (K-7272)

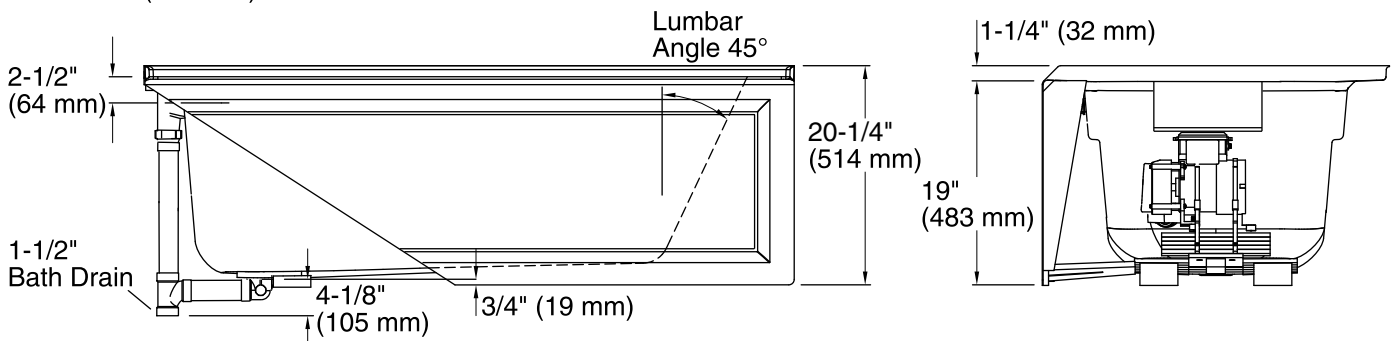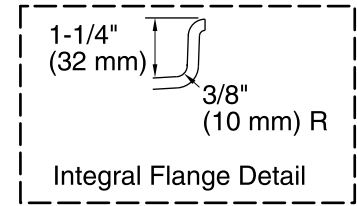

### Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump, Heated            120 V, 15 A, 60 Hz  
Surface:

### Technical Information

All product dimensions are nominal.

Installation:            3-Wall Alcove  
Drain location:        Left  
Basin area, bottom:   45-1/8" x 19-11/16" (1146 mm x 500 mm)  
Basin area, top:       52-3/4" x 25-5/16" (1340 mm x 643 mm)  
Weight:                141 lbs (64 kg)  
Minimum floor load:   49 lbs/ft<sup>2</sup> (239.2 kg/m<sup>2</sup>)  
Water depth:          15" (381 mm)  
Water capacity:       58 gal (219.6 L)  
Electrical component rating:   Pump: 120 V, 7 A, 60 Hz  
   Heated Surface: 120 V, 0.5 A, 60 Hz  
Pump speed:            Single  
Minimum flat for door: 2-3/16" (56 mm)

### Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.  
The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.  
Provide one grounded electrical outlet within 24" (610 mm) of each component.  
ADA compliant when installed to the specific requirements of these regulations.