

DEVONSHIRE_®

Features

- Metal construction
- Brass valve bodies
- · Quarter-turn washerless ceramic disc valves
- Flexible supplies
- · Lever handles are ADA compliant
- For 4" (10.2 cm) centers
- Pop-up drain with lift rod and tailpiece
- 4-3/4" (12.1 cm) spout reach
- 1.5 gallons (5.7 liters) per minute maximum flow rate


Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ASME 112.18.1/CSA B125
- NSF 61
- Energy Policy Act of 1992
- EPA WaterSense_®
- All applicable US Federal and State material regulations

CENTERSET LAVATORY FAUCET K-393







Colors/Finishes

- · CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Fir	Colors/Finishes	
K-393-N4	Centerset lavatory faucet	□ CP	☐ Other	
Optional Ac	cessories	,		
Additional flo	ow options are available (refer to the Kohler Price Book)			


Product Specification

The two-handle centerset lavatory faucet shall be of metal construction with brass valve bodies. Product shall have a maximum flow rate of 1.5 gallons (5.7 liters) per minute. Product shall feature quarter-turn washerless ceramic disc valves. Product shall be for 4" (10.2 cm) centers. Product shall feature a 4-3/4" (12.1 cm) spout reach, pop-up drain with lift rod and tailpiece, and lever handles which are ADA compliant. Product shall feature flexible supplies. Faucet shall be Kohler Model K-393-N4-____.

DEVONSHIRE®

Installation Notes

Install this product according to the installation guide.

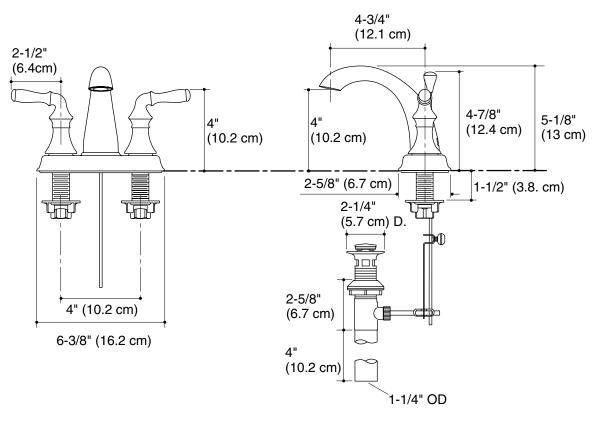

Product Diagram

