

INSTALLATION INSTRUCTION FOR 5041 5043 5044 5045

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .

ASSEMBLING THE FIXTURE (Fig.2)

1. Thread the pipe nipple (F) into bottom center of the hooks frame (E)., raise the lower socket frame (I) to bottom center of the pipe nipple (F), by turning it clockwise until tight
2. Place the socket sleeve (H) onto the socket.
3. Install the light bulbs in accordance with the fixture specifications
NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!
4. Hook the end of arms (G) to the hook on the frame (E) and the hook of the glass frame (J).

HANGING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old single bar.
2. Carefully unpack new fixture and lay all the parts on a clear surface.
3. Thread the two mounting screws about 1/4" into the pre-drilled holes in the single bar spaced the same distance apart as the holes in the fixture canopy (A).
4. Install the single bar to the Junction Box with the two Junction Box Screws as shown. The side of the single bar marked "GND" must face out.
5. While holding the canopy and lamp cluster towards the ceiling, connect the electrical wires as Shown in Fig.3, making sure that all wire connectors are secured. You may have to wrap the connections with electrical tape. If there is a Ground Wire (green or bare copper) in your outlet box, connect the fixture's Ground Wire to it. Otherwise connect fixture's ground wire directly to the mounting strap with the Green Screw provided. After wires being connected, tuck them carefully inside the Junction Box.
6. Then cover the junction box with canopy (A), aligning the Screw of mounting plate with the hole of canopy and lock it with brass ball nut(B).
7. Open one the end link of the chain provided and connect to the fixture loop (D). Close the link.
8. Lace the fixture wires through the chain.
9. Open the other end link of the chain and hang the fixture on the loop at the ceiling. Close the link.
10. Lace the fixture wires, ground wires through the loop and canopy (A) and pull until taut.

Your installation is now complete Return power to the junction box and test the fixture.

Fig.1

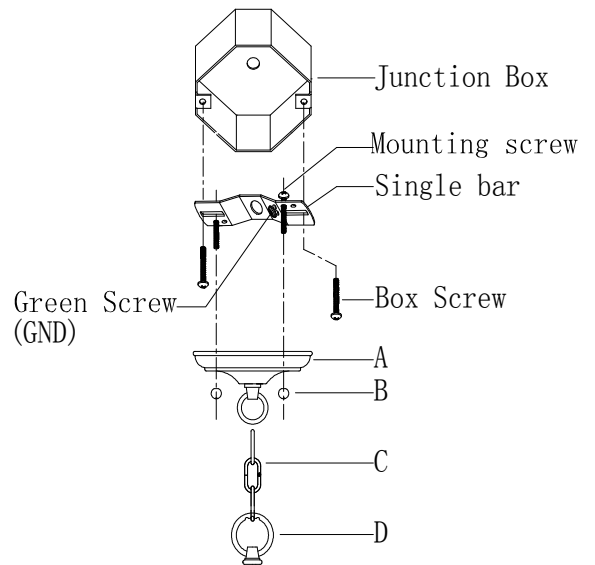


Fig.2

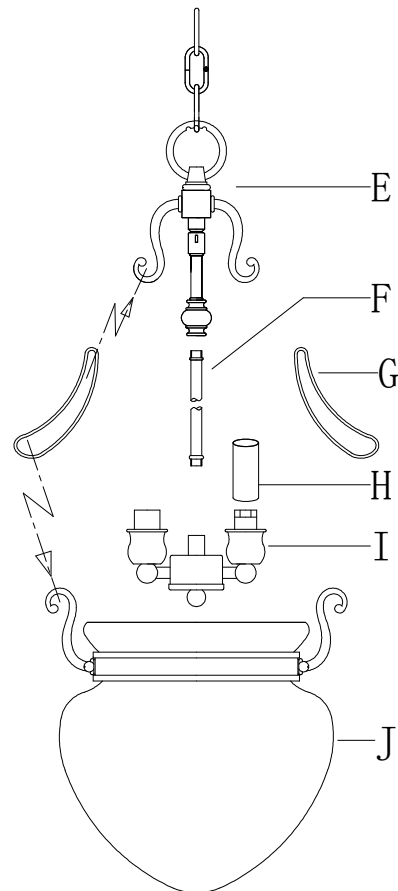








Fig.3

<p>FIXTURE WIRES Black or Smooth</p> 	<p>FIXTURE WIRES White or Ribbed</p> 	<p>FIXTURE WIRES Bare Copper (Ground)</p> 	<p>HOUSE WIRES Black (Hot)</p> 	<p>HOUSE WIRES White (Neutral)</p> 	<p>HOUSE WIRES Green or Bare Copper (Ground)</p> 
--	--	---	--	--	--