
# PRODUCT SPECIFICATIONS CFX32 Chesapeake Vent Free System







## 50 3/4" (1289 mm) 15 1/4" (387 mm) 26" (660 mm) (660 mm) (1564 mm)

#### **ACTUAL DIMENSIONS**

61 9/16"W x 50 3/4"H x 18 1/4"D (1564 mm x 1289 mm x 381 mm) Viewing area: 26"W x 15 1/4"H (396 in.²) (660 mm x 387 mm, 2555 cm²)

### **TECHNICAL INFORMATION**

BTU/HR Input: 26,000 Max. / 20,000 Min. (Natural and LP) Ignition System: Millivolt Control - Standing Pilot w/piezo igniter

Gas Type: Natural or LP Thermal Efficiency: Up to 99% Clearance to Combustibles:

Fireplace - 0" to stand offs on all sides

Top of Firebox Opening to Ceiling - 42" to combustibles Firebox Opening to Side Wall - 9" to combustibles

Front of Firebox - 42"

Hearth Requirement: 0" Clearance

Gas Line: 18" Flex line w/shut off 1/2" FPT


CSA Design Certified

#### **FEATURES**

Colonial designed face, Triple Play Burner System® ember bed burner with loose embers, glowing logs, and yellow flame, 3 piece ceramic fiber logs, junction box, mesh screen front, Barrington wood cabinet surround in unfinished or dark walnut.

#### FIELD INSTALLED ACCESSORIES

- Tavern Brown Firebrick
- Thermostat Blower (160 cfm) BLO24T
- Remote Controls RCB(E), RCMT, TSMT, TLM, WMTD, RCST(E), RCT, TSST, RCSTEBA, WWTD, WT

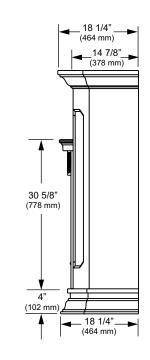















To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. v2 © 2011 Monessen Hearth Systems Co.