Summit™ ADA 1.28

Elongated Front, SmartHeight™, Vitreous China, Two-Piece Toilet



Features _____

- Elongated front, 16-1/2" SmartHeight™ bowl (ADA compliant)
- 1.28 Gpf / 4.86 Lpf
- SmartFasten™ 3-bolt tank-to-bowl connection
- PuraClean™ easy-to-clean glaze
- Decorative metal trip lever
- High performance MagnaFlush™ flushing technology
- 3" flush valve
- Pilot operated anti-siphon fill valve
- 12" rough-in
- 2" glazed trapway
- The Mansfield® limited lifetime warranty on china; Five-year limited warranty on tank trim
- Available in white and standard colors: biscuit and bone







Components _____

Model #	Description	Codes/Standards	
384-387	Elongated front, SmartHeight™ two-piece toilet. Less toilet seat and supply. Specify color.		
384	Elongated front, SmartHeight™ toilet bowl only. Less toilet seat. Specify color.	HET ADA CO	
387	Tank and cover only with left hand, front-mount, chrome-plated, metal trip lever. Less supply. Specify color.	VOOCAN	

Other Options:

387RH	Same as 387, with right hand trip lever.			
387LT	Same as 387, with tank liner.	HIGH EFFICIENCY TOILET		
*4385CTK	Elongated front, SmartHeight™ complete toilet kit. Includes slow close toilet seat, tank and bowl, flange bolts, wax ring with	HET ADA CO		
	polyethylene flange and instructions.			






Specifications

Model #	Description	Codes/Standards	
384-387	Elongated front, SmartHeight™ (1.28 Gpf / 4.86 Lpf) two-piece, toilet.	HET STORES FOR EXAMPLE ADA COMMENTS	

Specification	Description	Specification	Description
Material	Vitreous china	Trap Diameter	2"
Water Pressure Range	20 to 80 PSI	Trap Seal	2-1/2"
MaP Rating	1000 grams	Rough-in	12"
Water Usage	1.28 Gpf / 4.86 Lpf	Shipping Weight	Model 384 - 54 lbs.
Water Surface Area	9" X 10"		Model 387 - 36 lbs. Model 4385CTK - 95 lbs.
Flush System	3" flush valve - MagnaFlush™ Flushing Technology	Warranty	Vitreous China - Limited Lifetime Tank Trim - Limited Five Year

Technical Information

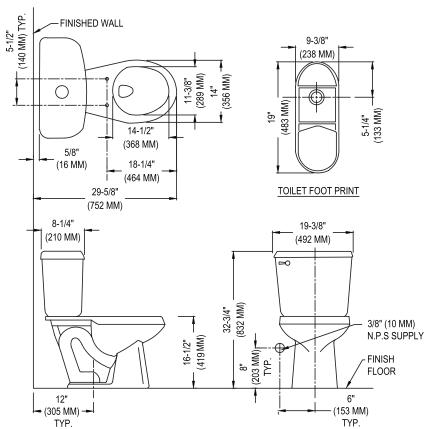

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and subject to change without notice.

Fixture performance and specifications meet or exceed ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.

