

shown in Textured Bronze  
with Metal Blades and  
Decorative Cage



# Acqua

*Designed in 2008*

The Acqua 360° rotational fan is thoughtfully designed to resemble the molecular structure of water, Earth's most precious resource. The Acqua offers fluid lines and quiet axial rotation. Its fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Acqua carries a limited lifetime warranty.

## Product Features



American  
Labor



AC  
Motor



360°  
Rotation



Safety Cage  
Compatible



Damp  
Location



Soothing  
White Noise



LED  
Lamp



Remote  
Control



Unipack  
Shipping



shown in Textured Bronze with Barn Wood Blades



shown in Textured Bronze with Mahogany Blades



shown in Textured Bronze with Matte Black Blades



shown in Textured Bronze with Metal Blades and Decorative Cage

# ACQUA

## FINISH AND BLADE OPTIONS

SKU#	AQ-XX-XXXX (Model+Finish+Blade)	
Standard Finishes	Textured Bronze	TB
NEW Blade Styles and Material	Solid Wood / Barn Wood	WDBW
	Solid Wood / Mahogany	WD
	Solid Wood / Matte Black	WDBK
	Metal w/ Decorative Cage	MTL
	Metal w/ Safety Cage	MSAF

## TECHNICAL SPECS

Fan Weight	27 lbs
Voltage	110 or 220
Motor Type	AC
Rotation	Yes
Downrods Lengths <i>Field cuttable.</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Overall Drop	16 inches / 41 cm + downrod length
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

## NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Wood	Metal with Guard
Fan Diameter	39 inches / 99 cm	37 inches / 94 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Safety Cage or Decorative Cage
RPM (Low / High)	721 / 1199	1040 / 1445
CFM (Low / High)	2750 / 4058	1825 / 3167
Watts (High)	101.25	80.50
CFM/Watt (High)	40.80	39.34
Blade Pitch	19°	31°

## LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	GU10 LED
Remote Dimmable	No
Delivered Temperature in K	2969
Delivered Lumens	337.30
CRI	94
Watts	5
Hours	36,000

Light kit longevity if used 6 Hours/Day: 16.5 Years

## STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 29°


Black 3-speed RF remote control with reverse



## ACCESSORY

Decora-style, 3-speed, non-dimmable wall control



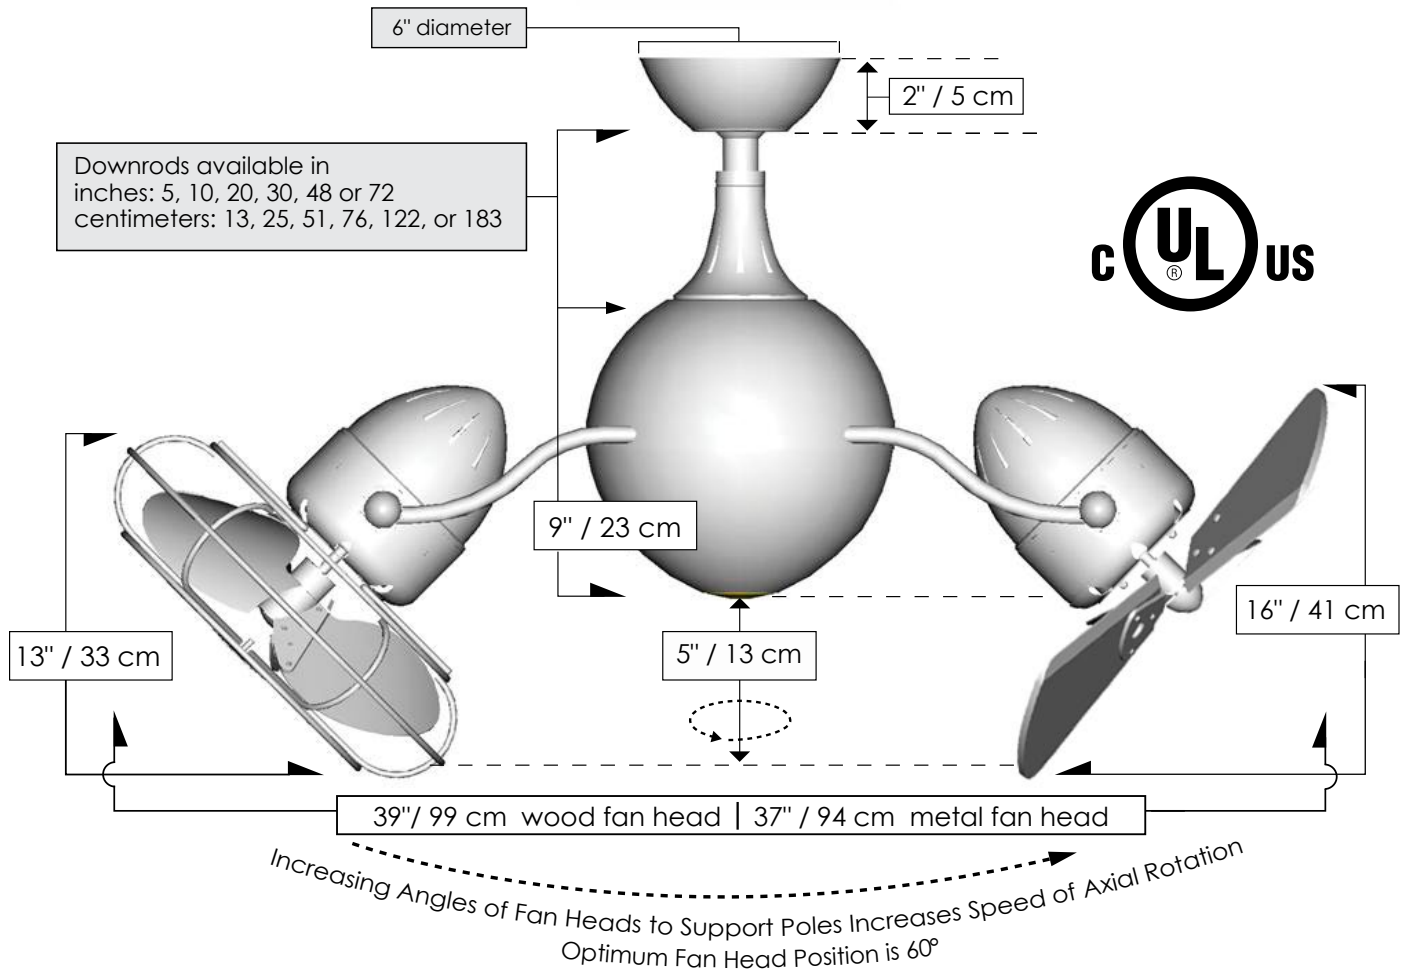

CEILING PITCH TABLE	
0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE	
Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm <i>Use safety cages if applicable</i>
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

### Matthews Fan Company

1881 Industrial Drive  
Libertyville, IL 60048  
Tele: 847.680.9043  
Fax: 847.680.8140  
www.matthewsfanco.com

© 2020 Matthews Fan Company. All rights reserved.

