

INSTALLATION INSTRUCTIONS

(TO INSTALL AS A FIXTURE UNIT)

Rev.11/11/2005


1258-357

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE FIXTURE, HARDWIRE VERSION (Fig. 2)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove old fixture including the crossbar.
3. After disconnecting the wire nuts to the cord, remove the cord and plug, or cut off the cord and plug that protruded from the fixture body. **(CAUTION: CAN NOT GO BACK TO PLUG VERSION ONCE THE CORD AND PLUG ARE CUT OFF) see (Fig.1)**
4. Attach Back-plate (G) to Outlet Box (F) using the two Screws (H). The side of the mounting plate (G) marked "GND" must face out.
5. Drill the hole in proper position on the wall according to the mounting location of the fixture.
6. Install Bracket (K) to the wall with Wood Screws (L) and Plastic Anchors (J)(provided)(see Fig.2) or install Bracket (K) with the Spring Wing and the Toggle Bolt (see Fig.4)

Fig. 2

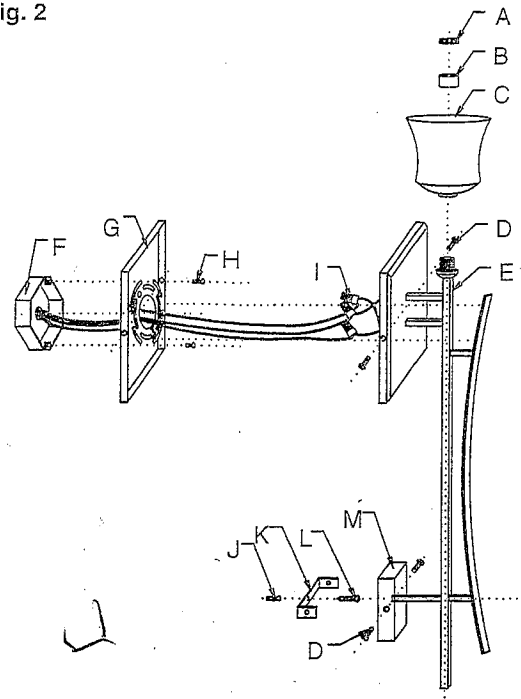

CONNECTING THE WIRES (Fig. 6)

7. Connect the electrical wires as shown in (Fig.6), making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the crossbar using the Green Screw provided.

FINISHING THE INSTALLATION (Fig. 2)

8. Place Fixture Body (E) over the Back-plate (G) and Bracket (K), then secure them tightly with Screws (D).
9. Slide Glass Shade (C) and Metal Tube (B) on to fitter and secure with Screw Shell (A).
10. Install the Light Bulb in accordance with the lamp's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!!)**

SPRING WING TOGGLE BOTS INSTALLATION: (SEE FIG.5)

1. Drill hole using the specified diameter bit. (Not: 11/16 inch)
2. Inset toggle bolt through fixture then thread it into spring wing.
3. Push spring wing through drilled hole and tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig.2) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 4

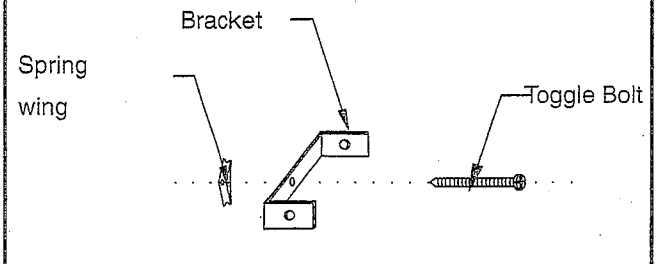


Fig.5

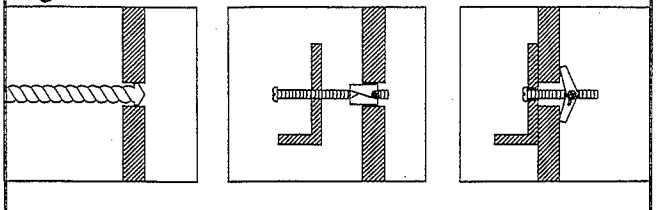


Fig. 6

