

Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

### DESCRIPTION

- Chrome plated metal construction
- Pressure balancing cycle valve design with an adjustable temperature
- 1/2" CC connections
- Includes showerhead, arm and flange

### **OPERATION**

- Clear acrylic knob style Handle
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3^{\circ}$

Showerhead is limited to 2.5 gpm (9.5 L/min) Max.

### **CARTRIDGE**

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

### **STANDARDS**

Third party certified to meet CSA B125.1, ASSE 1016, ASME A112.18.1, and all applicable requirements referenced therein

Rev. 2/11


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

# Specifications



**CHATEAU® POSI-TEMP® Single-Handle Shower Valve** 

Model: 2352

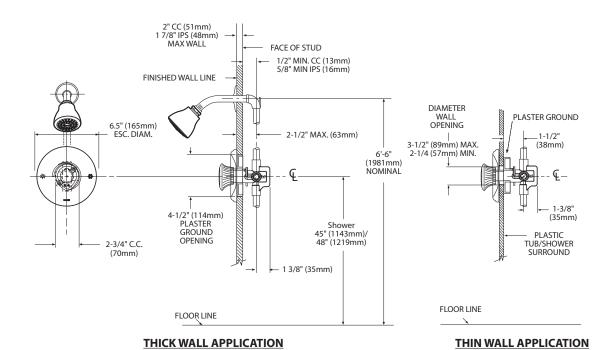

## **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com



# Specifications

### **DESCRIPTION**

- · Chrome plated metal construction
- Pressure balancing cycle valve design with an adjustable temperature limit stop
- 1/2" CC connections
- · Includes showerhead, arm and flange

### **OPERATION**

- Clear acrylic knob style Handle
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm\,3^\circ$

### FLOW

Showerhead is limited to 2.5 gpm (9.5 L/min) Max.

### **CARTRIDGE**

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- · Accommodates back to back installations

### **STANDARDS**

 Third party certified to meet CSA B125.1, ASSE 1016, ASME A112.18.1, and all applicable requirements referenced therein


### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



CHATEAU® POSI-TEMP® Single-Handle Shower Valve

Model: 2352

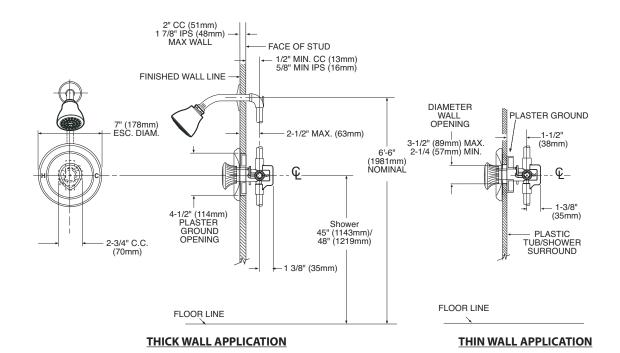

## **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com