

PF1704BBHEWH / PF1712BBHEWH



**High-Efficiency
Two-piece "Elementary" Toilet**

Product Features

- Two-piece vitreous china
- 10-1/2" high bowl
- 10" Rough-In
- 3" Flush Valve
- 1.28 gpf (4.8Lpf) HET, High Efficiency Toilet
- Direct Feed Jet
- Water Sense Certified
- Uses 20% less water than standard low consumption toilets
- Siphon Jet Technology
- Close Coupled tank with cover
- Quick connect, 2 bolt installation
- Anti-Siphon Fill Valve
- Fully Glazed 1-7/8" Trapway
- 7-1/2" x 6" Water Surface Area
- Standard Chrome, side mount trip lever
- Seat NOT included



PF1704BBHEWH / PF1712BBHEWH

Recommended Accessories

PFTSBB1000WH Elementary Commercial Toilet Seat

Available Parts

- PF9312FLPK** Fill valve assembly
- PF9412TLPK** Trip lever - chrome
- PF9412TGPK** Tank to bowl gasket & bolts
- PF9412FVPK** Flush valve assembly
- PF9412FRPK** Flapper only
- PF5112LIDWH** Tank Lid, White

Technical Information

Fixture:	
Configuration	two-piece toilet
Water per flush	1.28gpf/4.8Lpf
Spud size	N/A
Trapway	1-7/8" fully glazed
Water area	1-1/2" x 6"
Seat post hole centers	5-1/2"

Codes and Standards

- Meets or exceed the following standards and codes;
- ASME A112.19.2/CSA B45.1
 - EPA WaterSense®
 - *MaP System Score = 600 grams @ 1.28 gpf (4.8Lpf)
 - Energy Policy Act of 1992
 - Product will bear the cUPC® certification mark
 - Product will bear the EPA WaterSense® seal

Specified Model

Model	Model Description	Color Finishes
PF1704BBHEWH	RF Bowl only, 10-1/2" high	○ White (WH)
PF1712BBHEWH	Tank only 10" RI for PF1704BBHEWH	○ White (WH)
PF1712BBLHEWH	Tank only with locking lid for PF1704BBHEWH	○ White (WH)
PF1712BBRHEWH	Tank with RH (right hand) tank lever for PF1704BBHEWH	○ White (WH)




PF1704BBHEWH / PF1712BBHEWH



High-Efficiency Two-piece Two-piece "Elementary" Toilet

Product Specification:

The combination toilet shall be made of vitreous china. Toilet shall be 1.28gpf/4.8Lpf. Toilet shall have 2" (5.1 cm) glazed trapway. Toilet shall be less seat and supply.

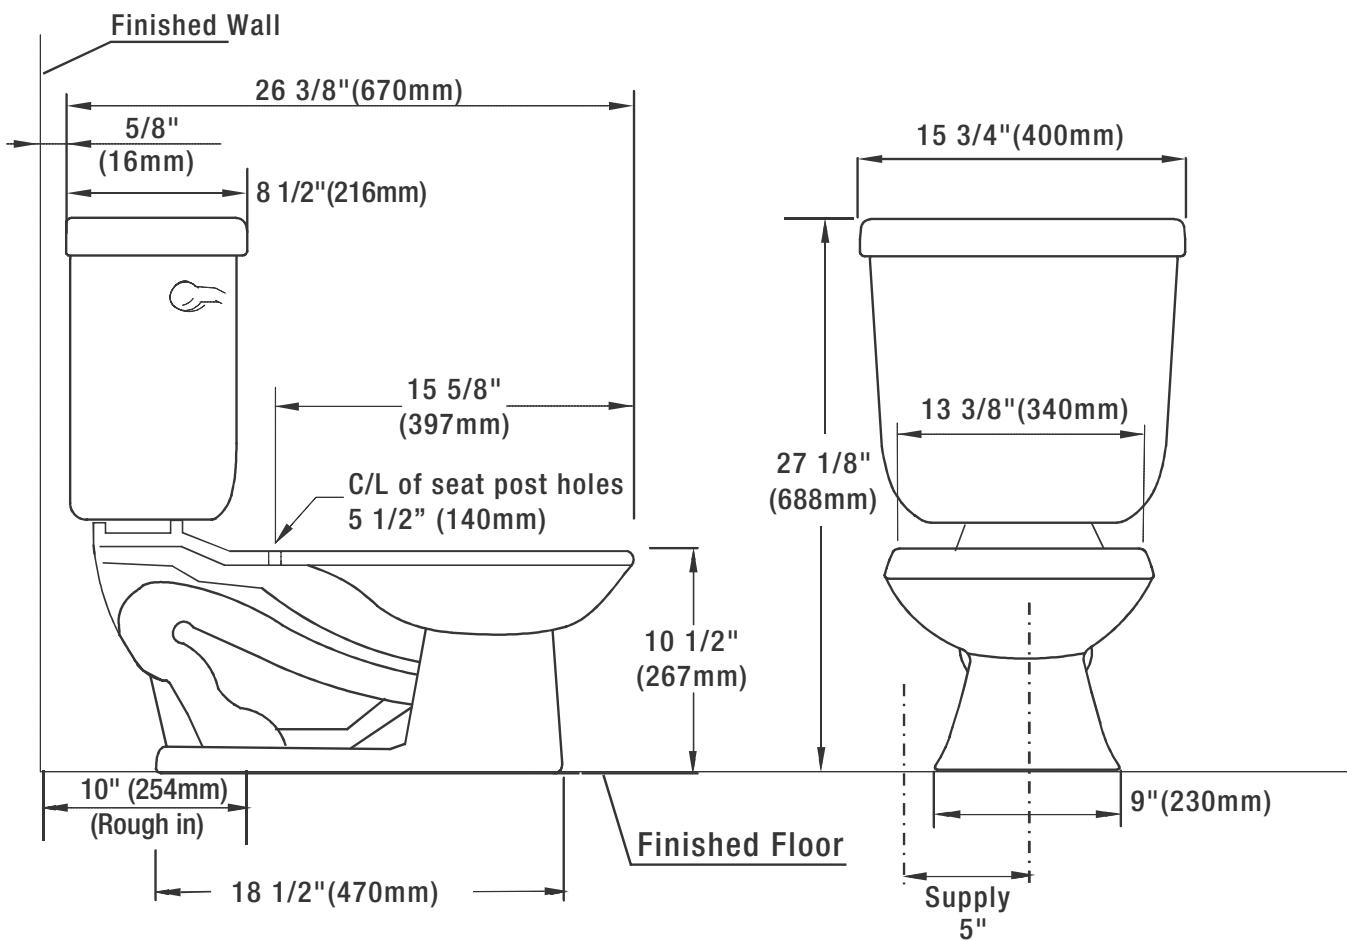

Warranty and Codes

These products come complete with installation, operating, care and maintenance instructions. All PROFLO fixtures carry a 1- year limited warranty. These products meet or exceed ASME/ANSI A112.19.2M. In an effort to continually improve our products, FEI will make design changes from time to time. We reserve the right to ship newly designed product to fill any order unless we agree in writing to do otherwise.

