

TOTO®

Perfection by Design


CST744SL Drake Close Coupled Toilet, ADA, 1.6 GPF




CST744SL - Drake Toilet, ADA Model
SS114 - SoftClose Seat



G-Max Technology: Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose toilet seat, or upgrade to a Washlet.

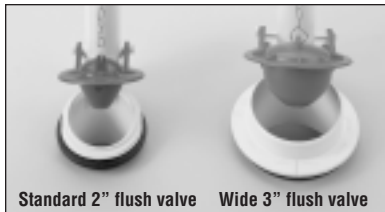

Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.

- Contemporary, high profile design
- ADA Compliant
- G-Max Technology
- Powerful, quiet flush every time
- Wide, 2-1/8" computer designed trapway
- Large water surface

High profile, ADA compliant close coupled toilet. Low consumption (6 Lpf/1.6 Gpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, less seat.

■ **CST744SL**

Elongated, 12" rough-in, less seat

□ **C744SL**

Elongated bowl only, 12" rough-in.

□ **ST743S**

Drake tank and cover only. Complete with tank trim and coupling components.

□ **ST743SB**

Drake tank and cover only. Complete with tank trim and coupling components. Bolt down lid.

□ **ST743SD**

Drake tank and cover only. Complete with tank trim and coupling components. Insulated tank.

□ **ST743SDB**

Drake tank and cover only. Complete with tank trim and coupling components. Bolt down lid and insulated tank.

□ **ST743SR**

Drake tank and cover only. Complete with tank trim and coupling components. Right hand trip lever.

□ **SS114**

SoftClose: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

□ **SC134**

Elongated, open front seat with lid.

□ **SC534**

Elongated, open front seat less lid.



Colors:

Standard #01 Cotton

Optional See price book for additional colors

Trip Lever:

Standard #CP Chrome Plated

Optional See price book for additional finishes

Augusta Decorative Collection

CST744SL

Drake Close Coupled Toilet, ADA, 1.6 GPF

■ PERFORMANCE

The TOTO G-Max low consumption toilets received high ratings during ANSI/ASME and CSA testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf
 Flush System: Gravity Feed (G-Max System)
 Min. Water Pressure: 8 psi
 Water Surface: 10-3/8" x 8-1/4"
 Trap Diameter: 2-1/8"
 Rough-in: 12" rough-in
 Trapseal: 2-3/8"
 Warranty: Five Year Limited Warranty
 Material: Vitreous china

Shipping Weight: **C744SL** 56.5 lbs.
ST743S 35 lbs.

Shipping Dimensions: **C744SL** 29-1/2"L x 16"W¹
 x 10-1/4"W² x 18-1/2"H
ST743S 20-1/8"L x 8-1/4"W
 x 15-1/2"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.

Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others




Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor.

Recommended seat: SS114

These dimensions and specifications are subject to change without notice.

U.S. Patent: D406.329 5.918.325
 5.983.413 and pending

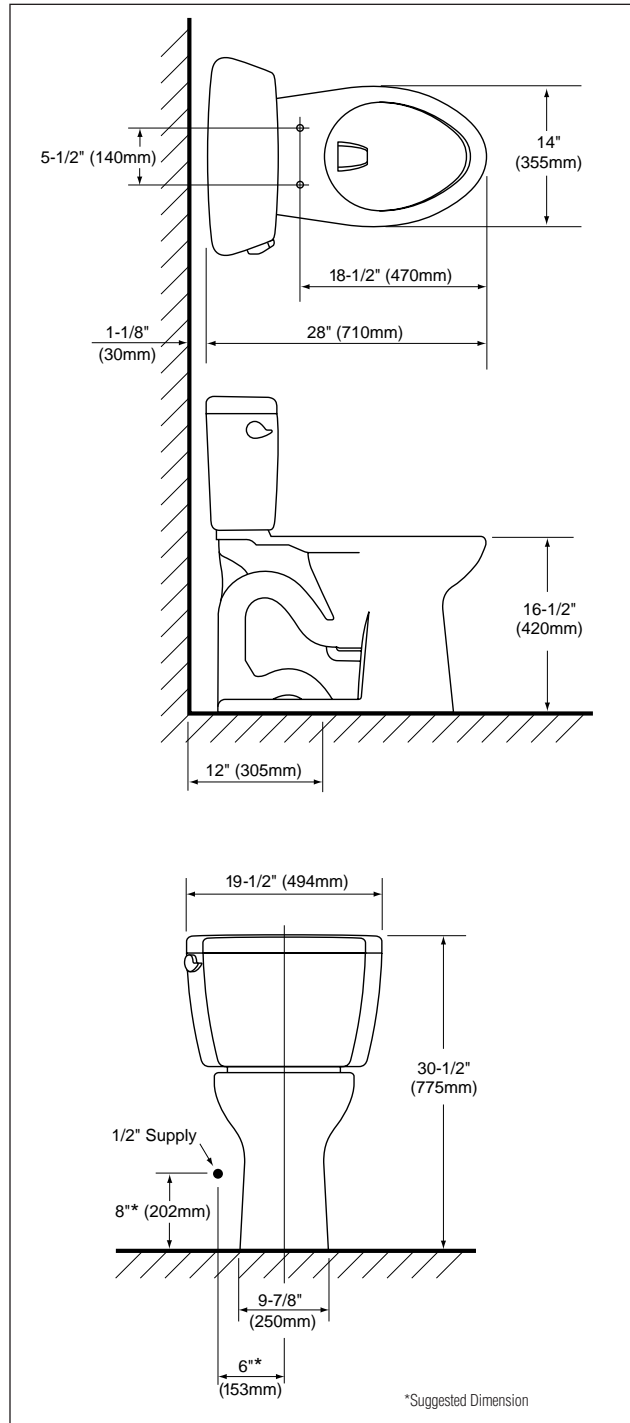

CST744SL - Drake Toilet, ADA Model

TOTO[®]
 Perfection by Design

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (770) 282-8686 • Fax. (770) 282-8701 • www.totousa.com
 Printed in U.S.A. © TOTO LTD. 10/02 #A10120

Printed on recycled paper

REV 10/02