# Eco Drake® Close Coupled Toilet, 1.28GPF

#### **FEATURES**

- E-Max® flushing system
- Close coupled, high performance toilet
- Round front bowl and tank set, less seat
- Chrome trip lever
- 12" Rough-in, less supply

#### **MODELS**

- CST743E Round bowl, 12" rough-in, less seat
- CST743ER
   Same as CST743E with right hand trip lever (special order)
- CST743ERB\*
   Same as CST743ER with right hand trip lever and boltdown tank lid (special order) (#01 Cotton only)

#### COMPONENTS

- C743E Round Front Bowl
- ST743E Tank and Cover only Left-hand trip lever
- ST743ER Tank and Cover only Right-hand trip lever
- ST743ERB Tank and Cover only Right-hand trip lever and bolt-down lid (#01 Cotton only)
- SS113 SoftClose® seat (sold separately)

#### **COLORS/FINISHES**

#01 Cotton
 #03 Bone
 #11 Colonial White
 #12 Sedona Beige
 #51 Ebony

#### PRODUCT SPECIFICATION

The two-piece E-Max flushing system toilet shall be 1.28GPF/4.8LPF. Toilet shall have high-profile tank, round front bowl and chrome trip lever. Toilet shall be TOTO Model CST743E





#### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance





## Eco Drake® Close Coupled Toilet, 1.28GPF

#### **SPECIFICATIONS**

Water Use
 1.28 GPF/4.8LPF

Flush System E-Max
Min. Water Pressure 8 psi (static)
Water Surface 10-1/4" x 8-1/2"

Trap Diameter 2-1/8"
 Rough-in 12"
 Trap Seal 2-3/8"

• Warranty One Year Limited Warranty

 Material Vitreous china
 Shipping Weight C743E - 53lbs ST743E(R)(B) - 35lbs

Shipping Dimensions C743E


27-3/4"L x 15"W1 x 10-1/4"W2 x 15-3/4"H


ST743E(R)(B) 20-1/8"L x 8-1/4"W x 15-1/2"H


#### **INSTALLATION NOTES**

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

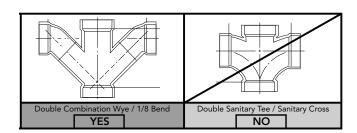

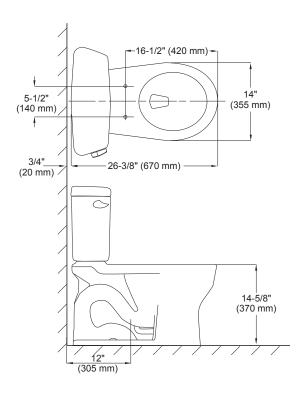



### TOTO<sub>®</sub>

These dimensions and specifications are subject to change without notice