TOTO_®

MS654114MF

Aquia® One-Piece High-Efficiency Toilet, 1.6GPF & 0.9GPF

FEATURES

- Dual-Max® flushing system, low consumption (1.6GPF/6.0LPF & 0.9GPF/3.4LPF)
- Elongated skirt
- Universal Height
- One-piece elongated toilet with SS114 seat
- Dual flush option
- Chrome push-button
- 12" rough-in

MODELS

 MS654114MF - Elongated One-Piece Toilet with SS114 SoftClose® seat

COLORS/FINISHES

Standard #01 Cotton #03 Bone #11 Colonial White #12 Sedona Beige #51 Ebony

PRODUCT SPECIFICATION

The one-piece, universal height, low consumption dual-max flushing system toilet shall be 1.6GPF/0.9GPF. Toilet shall have high-profile tank, elongated front bowl and chrome push-button. Toilet shall be TOTO Model MS654114MF____.



DUAMAX®

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSensesm, State of Massachusetts, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others



Aquia® One-Piece High-Efficiency Toilet, 1.6GPF & 0.9 GPF

SPECIFICATIONS

• Water Use 1.6 GPF & 0.9GPF (6.0 LPF & 3.4LPF)

Flush System Dual-Max
Min. Water Pressure 8 psi (flowing)
Water Surface 5-1/4" x 4-1/4"

Trap Diameter 1-3/4"Rough-in 12"Trap Seal 2-1/4"

• Warranty One Year Limited Warranty

Material Vitreous china

Shipping Weight MS654114MF - 112lbs

Shipping Dimensions MS654114MF


32" L x 19-7/8" W


x 29-1/4" H

INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

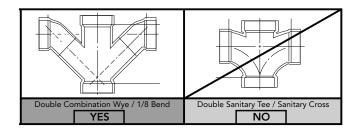

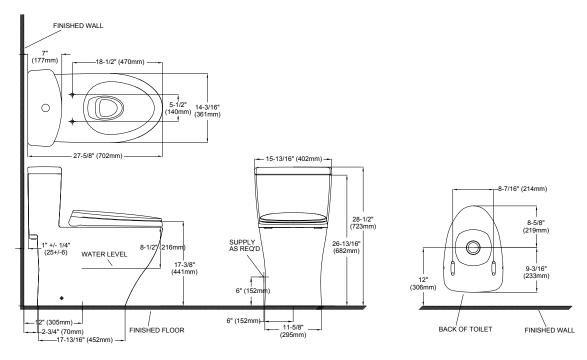

TOTO:

These dimensions and specifications are subject to change without notice