
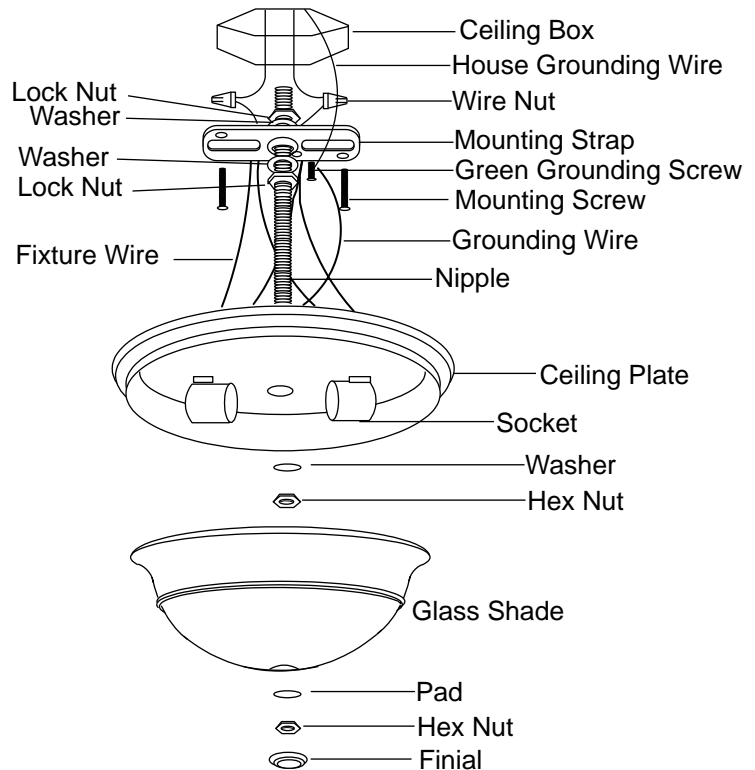
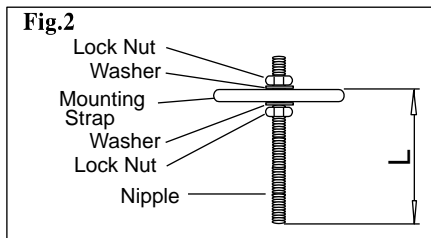


ASSEMBLY AND INSTALLATION INSTRUCTIONS

CC11813

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

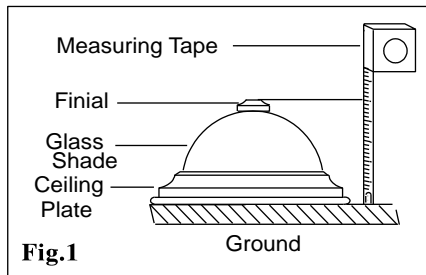

Installation Steps:

1. Measure the fixture height from ceiling plate to the finial. (See Fig.1)
2. Thread the nipple into the mounting strap and adjust the length as you measured (See Fig.2), and then tighten with 2 washer and 2 lock nuts by wrench.
3. Attach the mounting strap to the ceiling box by using 2 mounting screws.
4. Make wire connections with wire nuts:
 - Connect black wire from light to black wire from power source with a wire nut.
 - Connect white wire from light to white wire from power source with a wire nut.
 - Attach the grounding wire and house grounding wire to the mounting strap with the green grounding screw.Carefully tuck wires back into the ceiling box.
5. Attach the ceiling plate to the mounting strap by inserting the nipple, and secure with a washer and a hex nut.
6. Install bulbs. (Please do not exceed the maximum capacity which is recommended on the package.)
7. Attach the glass shade to the ceiling plate by inserting the nipple, and then secure with the pad, hex nut and finial.
8. Turn on the power at fuse or circuit box.