
ASSEMBLY AND INSTALLATION INSTRUCTIONS

CT-OWD060 / CT-OWD080

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.

2. READ AND SAVE THESE INSTRUCTIONS.

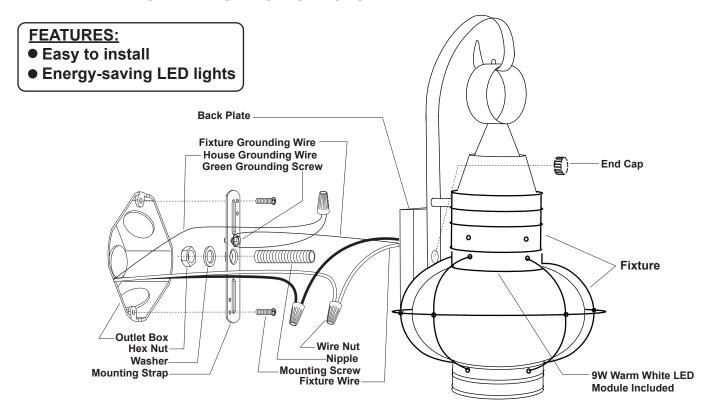

- 1. Attach the nipple to the mounting strap, then secure it with a washer and hex nut.
- 2. Attach the mounting strap to the outlet box by using two mounting screws.
- 3. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - --- The black wire from the fixture to the black wire from the power source.
 - --- The white wire from the fixture to the white wire from the power source.
 - ---Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
 - Carefully put the wires back into the outlet box.
- 4. Attach the back plate of the fixture to the mounting strap by inserting the nipple, then secure it with the end cap.
 - CAUTION: With silicone caulking compound, caulk completely around where the back plate meets with the wall surface to prevent water from seeping into the outlet box.
- 5. Turn on the power at the main fuse or circuit breaker box.

