

**TROPIC CADET® 3 ROUND FRONT TOILET**

- ❑ **2455.016**
  - Vitreous china
  - EverClean™ anti-microbial surface which inhibits the growth of stain and odor causing bacteria, mold, and mildew
  - Low-consumption (6.0 Lpf/1.6 gpf)
  - Features the **Cadet@3 Flushing System**
  - Space saving round front siphon action jetted bowl
  - Fully-glazed 2-1/8" trapway with 2" ball pass
  - Generous 9" x 8" water surface area
  - Close-coupled tank with flat tank cover for superior storage
  - Oversized 3" flush valve with chemical resistant flapper
  - Chrome trip lever
  - Speed Connect™ tank-to-bowl coupling system
  - Sanitary dam on bowl with four point tank stabilization
  - 2 color-matched bolt caps
  - 100% factory flush tested
  - 5 year warranty



- ❑ **3011.016** Round Front Bowl
- ❑ **4007.016** Tank

**Nominal Dimensions:**  
718 x 476 x 740mm (28-1/4" x 18-3/4" x 29-1/8")  
Fixture only, seat and supply by others


- Alternate Tank Configurations Available:**
- ❑ **4007.516** Tank complete with Aquaguard Liner

**Compliance Certifications - Meets or Exceeds the Following Specifications:**

- ASME A112.19.2M for Vitreous China Fixtures - includes Flush Performance, Ball Pass Diameter, Trap Seal Depth and all Dimensions
- Los Angeles Department of Water and Power Supplementary Purchase Specification for Non-Adjustability

**To Be Specified:**

- ❑ Color: ❑ White ❑ Bone ❑ Silver ❑ Linen ❑ Black
- ❑ Seat: #5330.010 Round front Champion® Slow Close solid plastic seat and cover with easy lift off feature
- ❑ Seat: #5282.011 Round front EverClean™ anti-microbial solid plastic seat and cover
- ❑ Seat: #5308.014 Round front Laurel molded wood seat and cover
- ❑ Supply with stop:

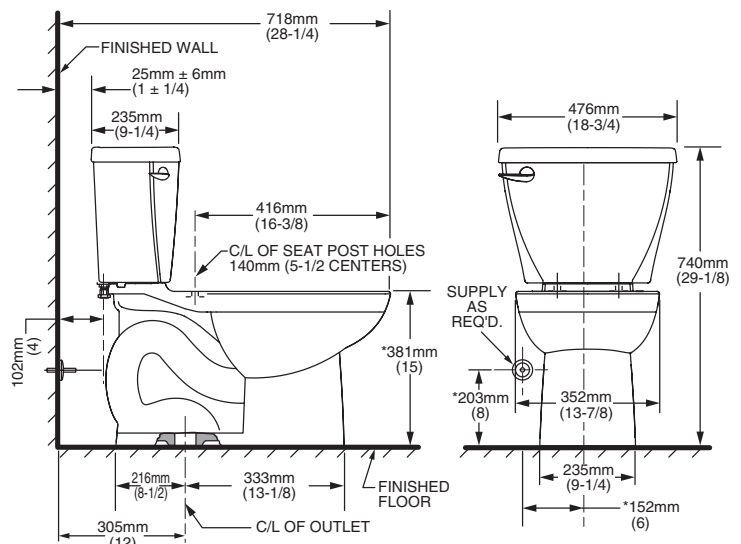

**NOTES:**  
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.  
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.  
\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

**CADET® 3**  
Flushing System