

INSTALLATION INSTRUCTION FOR FIXTURE# 4493

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLY THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. Remove the old fixture from ceiling, including the old cross bar.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to lose any small parts necessary for installation.
3. Assemble the down rods (H) together using the nipple (I) until desired length is reached. Feed wire through down rod as needed..
4. Thread the center tube (M) into the coupling (T) tightly.
5. Insert the bottom end of the tube (K) onto the pin (S), then install the decorative arm (L) over the center tube (M) and let the top end of the tube (K) protrude through the side hole on the decorative arm (L), and tighten with the coupling (V) and decorative nut (J).
6. Assemble the fabric shade onto the fixture arm using screw with nut (O) well.
7. Put the glass shade (Q) and ring(U) over the socket (R) and secure with socket ring (P).
8. Thread the bottom end of down rod (H) into the coupling (V) using the nipple (I) tightly, then thread the swivel (G) onto the top end of the nipple (I) tightly.
9. Install the bulbs in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXMUM WATTAGE RATING!)**
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).

MOUNTING THE FIXTURE

10. Attach the universal mounting plate (B) to the outlet box using the outlet box screws (A). The side of the mounting bar marked "GND" must face out.
11. Follow the wiring instructions carefully (See Fig.2).
12. Attach the fixture main body onto the universal mounting plate (B) by protruding 2 mounting screws (C) through the mounting holes of the ceiling canopy (D) and secure with hex nut (E) & ball nut (F).

Wiring (See fig.2)

1. Connect the electrical wires as follows. Connect the black wire from the fixture to the black (HOT) house wire. Connect the white wire from the fixture to the white (Neutral) house wire. Make sure all the wire nuts were secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (Green or Bare Copper) connect fixture's ground wire to it. Other wise attach the bare copper fixture wire to the green ground screw on the mounting bar.
2. Tuck the wire connections neatly into the ceiling junction box.

Your installation is now complete. Turn on the power supply of the junction box to test the fixture.

Fig.1

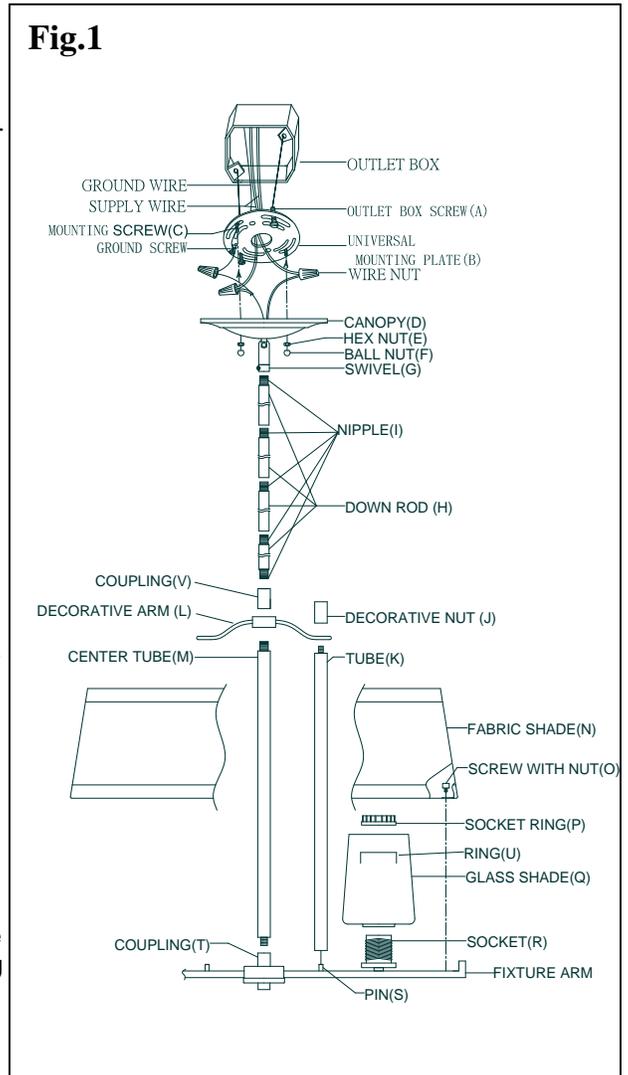


Fig .2

<p>FIXTURE WIRES Black or Smooth</p>	<p>FIXTURE WIRES White or Ribbed</p>	<p>FIXTURE WIRES Bare Copper (Ground)</p>
<p>HOUSE WIRES Black (Hot)</p>	<p>HOUSE WIRES White (Neutral)</p>	<p>HOUSE WIRES Green (Ground)</p>

