

## EBF-625

- ▶ **Description**  
Battery Powered, Sensor Activated, Chrome Plated Brass Pedestal Electronic Hand Washing Faucet for tempered or hot/cold water operation.
- ▶ **Flow Rate**  
 0.5 gpm/1.9 Lpm Vandal Resistant Spray Head  
(See Accessories for other Spray Head options)
- ▶ **Specifications**  
ADA Compliant, Battery Powered, Sensor Activated, Chrome Plated Cast Brass, Pedestal Hand Washing Faucet with the following features:
  - Splash-proof Circuit Control Module
  - Sensor Range Adjustment Screw
  - Low Battery LED Indicator Light
  - User friendly Variable Time Out Settings
  - Filtered Solenoid Valve with serviceable Strainer Filter
  - Bak-Chek<sup>®</sup> Tee for Hot/Cold Supply
  - Vandal Resistant Spray Head with Pressure Compensating Flow Control
  - Metal Jacketed Wire Protection for Sensor Lead
  - Includes four (4) AA-size Alkaline Batteries
  - Includes appropriate Mounting Hardware
  - Mounts on a single-hole lavatory or deck
  - Optional 6 VDC Plug-in Transformer available (Batteries act as backup when using optional transformer)
- ▶ **Variations**  
(Add suffix to Model Number for inclusion with Faucet)
  - Trim Plate (must be specified)
    - 4 Trim Plate for 4" Centerset Sink
    - 8 Trim Plate for 8" Centerset Sink
  - Temperature Mixing Valves (optional)
    - ADM Above Deck Mechanical Mixing Valve  
(only available for installation on 8" centerset sinks)
    - BDM Below Deck Mechanical Mixing Valve
    - BDT Below Deck Thermostatic Mixing Valve
 Bak-Chek<sup>®</sup> Tee not required or provided when a Temperature Mixing Valve is included with the faucet.

Consult Factory for Finish Variations
- ▶ **Accessories** (Specify separately)
  - Vandal Resistant Spray Heads
    - ETF-1029-A 2.2 gpm/8.3 Lpm Laminar Flow Spray Head  
(recommended for medical applications)
    - ETF-1024-A 2.2 gpm/8.3 Lpm Aerator
  - Grid Strainer
    - ETF-460-A Chrome Plated Brass Grid Strainer w/1¼" Outlet Tube
  - Transformer
    - SFP-6 120 VAC/6 VDC Plug-in Transformer

See OPTIMA Accessories Section of the Sloan Catalog for a complete listing of OPTIMA Faucet Accessories and Variations.



- ▶ **ADA Compliant**
- ▶ **Automatic**  
The Sloan OPTIMA Plus<sup>®</sup>EBF-615 Battery Powered Hand Washing Faucet operates by means of an infrared sensor. Once the user's hands enter the sensor's effective range, the Solenoid activates the water flow. Tempered water flows from the Faucet until hands are moved away. The Faucet then automatically shuts off and resets for the next use.
- ▶ **Hygienic**  
The ultimate in sanitary protection — there are no handles to turn or buttons to push. Helps to control the spread of infectious diseases. Ideal for high traffic commercial installations.
- ▶ **Economical**  
Automatic operation provides water usage savings over other faucet devices. Reduces maintenance and operation costs. Battery operation is ideal for Retrofit installations. Optional plug-in transformer available.
- ▶ **Warranty**  
3 year (limited)
- ▶ **Compliant to:** ASME A112.18.1 and CSA B125.1



Listed by I.A.P.M.O.



This space for Architect/Engineer approval

Job Name \_\_\_\_\_ Date \_\_\_\_\_

Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_

Variations Specified \_\_\_\_\_

Customer/Wholesaler \_\_\_\_\_

Contractor \_\_\_\_\_


Architect \_\_\_\_\_

# EBF-625

## FAUCET DIMENSIONS

**Description**  
Battery Powered, Sensor Activated, Chrome Plated Brass Pedestal Electronic Hand Washing Faucet for tempered or hot/cold water operation.




**Flow Rate**  
□ 0.5 gpm/1.9 Lpm Vandal Resistant Spray Head  
(See Accessories for other Spray Head options)

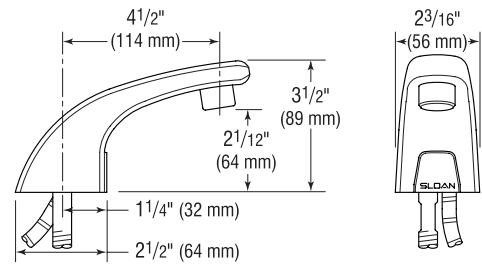


## ELECTRICAL SPECIFICATIONS

- ▶ **Control Circuit**  
6 VDC — operates on four (4) alkaline AA-size batteries.  
Optional 6 VDC plug-in Transformer
- ▶ **Battery Life**  
2 years at 8,000 cycles/month
- ▶ **Indicator Lights**  
Range Adjustment/Low Battery
- ▶ **OPTIMA<sup>®</sup> Sensor Range**  
Factory Set: 4" - 5" (102 mm - 127 mm)  
Adjustable: 2" - 7" (51 mm - 178 mm)
- ▶ **Solenoid Valve**  
Filtered Solenoid Valve with serviceable Strainer Filter
- ▶ **Time Out Adjustment Settings**  
30 seconds — The Faucet Time Out Setting determines the maximum time the faucet will run upon continuous activation. The EBF-615 is factory set at the 30 second time out. Consult factory for time out settings to meet individual application requirements.
- ▶ **Max. Distance Control Module may be Installed from Spout**  
With Standard Cable: 15" (381 mm)


## OPERATION

1. A continuous invisible beam of light is emitted from the OPTIMA Sensor located at the base of the lavatory faucet. 
2. As the user's hands enter beam's effective range, beam is reflected back into Sensor Receiver and activates the Solenoid Valve allowing tempered water to flow from faucet. Water will flow until hands are removed or until faucet reaches its automatic time out limit setting. 
3. When hands are moved away from the OPTIMA Sensor, the loss of reflected light initiates an electrical signal that deactivates the Solenoid Valve, shutting off the water flow. The Circuit then automatically resets and is ready for the next user. 


EBF-625 Faucet with Bak-Chek<sup>®</sup> Tee for Hot and Cold Water Supply (shown with 4" trim plate)

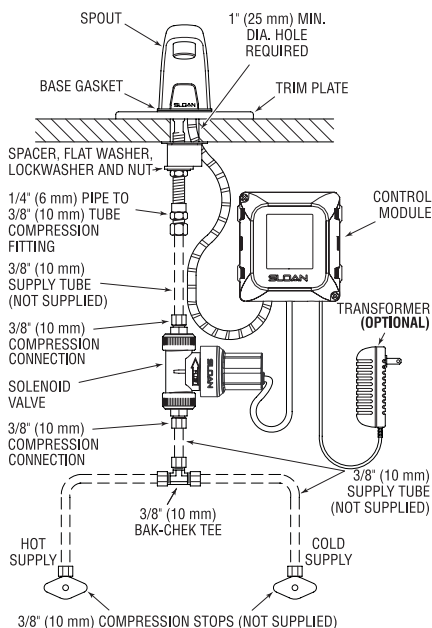

EBF-625 Faucet with ADM Variation Mixing Valve for Hot and Cold Water Supply (shown with 8" trim plate)

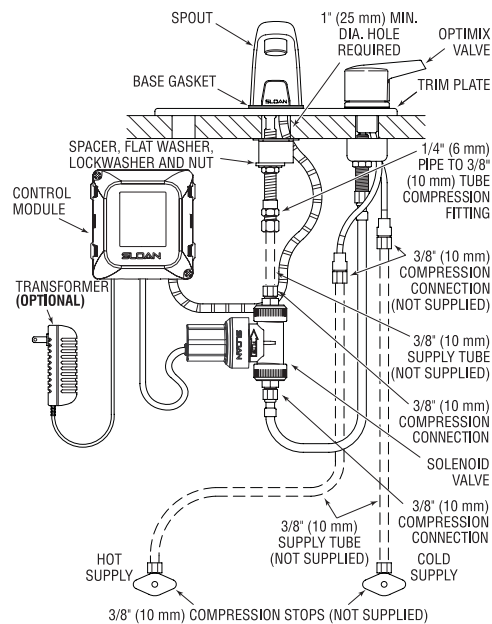

EBF-625 Faucet with BDM and BDT Variation Mixing Valves for Hot and Cold Water Supply (shown with 4" trim plate)

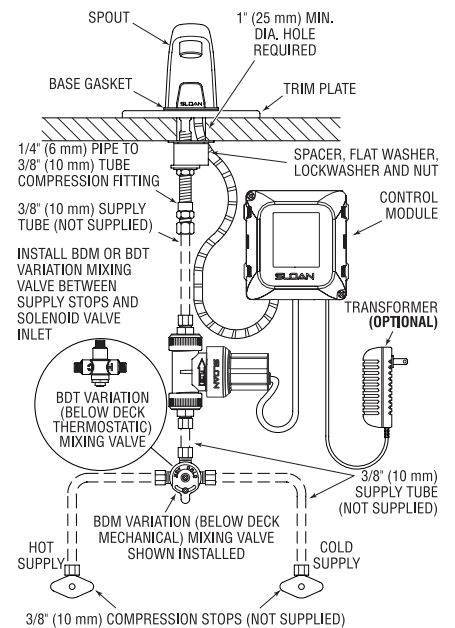

SLOAN VALVE COMPANY • 10500 SEYMOUR AVENUE • FRANKLIN PARK, IL 60131  
Phone: 1-800-9-VALVE-9 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380 • www.sloanvalve.com