Surface Mount Grid System

CeilingMAX®

- High-grade PVC

- No wires to hang or time-consuming leveling

- Available in a wide range of colors and finishes

- "Snap-In" technology makes installation simple and easy

- "Snap-Out" technology provides ability to access the plenum or to replace tiles at any time

- Works with most standard 2' x 2' or 2' x 4' acoustical ceiling tile designed for $^{15}\!/_{16}$" grid

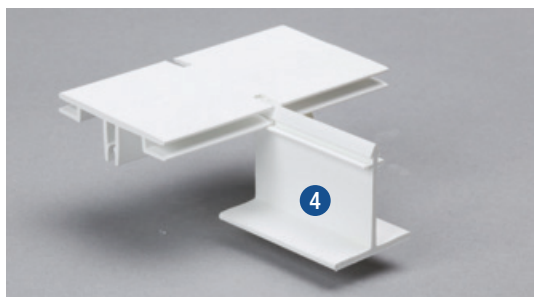- Eliminates rust and scratches without demolition, cost or mess

CeilingMAX is perfect for direct applications over plaster, joists, drywall and paste-up ceilings. Surface-mounted grid system saves up to 6" of ceiling height.

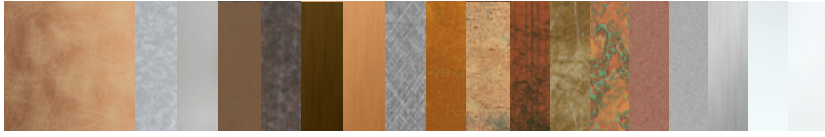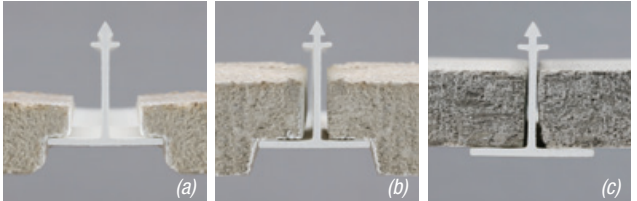|	
Surface Burning Characteristics	ASTM E 84 Class "A" fire-rated — Flame and Smoke V.O. rating under U.L. 94
Load	Intermediate duty (12 lbs per sq ft)
Safety	Approved for food manufacturing/processing
Durability	Rust and corrosion resistant
Material	White and solid colors: virgin-grade vinyl Metallic finishes: virgin-grade vinyl with hot foil laminate
Compatibility	Works with most standard 2' x 2' or 2' x 4' tile designed for $15/16$" grid (¾" maximum tile depth)
Warranty	25-year limited warranty

Item description	Item #	Dimensions
❶ Top Hanger	109 - white	96" x 1½" x $^{15}\!/_{32}$"
❷ Runner	119 - white / 110 - color	96" x $^{15}\!/_{16}$" x $^{15}\!/_{16}$"
❸ Wall Bracket	159 - white / 150 - color	96" x $^{15}\!/_{16}$" x $1^{3}\!/_{16}$"
❹ Cross Tee	129 - white / 120 - color	23" x $^{15}\!/_{16}$" x $^{15}\!/_{16}$"
25" Tee*	121 - white	25" x $^{15}\!/_{16}$" x $^{15}\!/_{16}$"

The 25" cross tee is used when installation is started at the room's edge with a full border tile. This occurs only when a room's dimensions are exactly divisible by 2 (e.g., 12', 28', etc.)

CeilingMAX over joists

CeilingMAX over existing tile ceiling

CeilingMAX is available in mulitple colors & finishes that match Fasade Decorative Thermoplastic Ceiling Panels. Visit www.fasadeideas.com for more information.

(a) *(b)* *(c)*

Tile interface options: (a) beveled tegular (b) square tegular (c) flat

For more information or to place an order, please call 800-434-3750 or email sales@acpideas.com. Visit us online at acpideas.com.

N06-95 (01.10.17)