

American Pride


526 Crest Road-Flat Rock, N.C. 28731 828-697-8847 Fax 828-697-7094

Product Data Specifications

Model # 97VM131BOS Surface Mount Medicine Cabinet

| | |
|---------------------------|---|
| Mirror Door: | 21 1/4"x 31 1/4"x 3/16" Oval with 1" Bevel High impact polystyrene door backing bonded to mirror with double faced tape and specially formulated bonding agent. |
| INSIDE DEPTH: | 3-1/2" with 4" total overall |
| SHELVES: | 2 White Adjustable Polystyrene & 1 Fixed Styrene |
| HINGE: | 1 8" Tri-Brite galvanized piano |
| DOOR OPERATION: | One riveted stainless steel striker plate and magnetic catch closure mechanism |
| MOUNTING HARDWARE: | 4 #8 x 1 1/2" & 2 #10 x 2.5" Steel Tapping Screws(see dwg for S/M) |
| REVERSIBLE: | Yes |
| DOOR BACKING: | White High Impact Polystyrene .060 Thickness |
| CABINET: | Injection Molded in White Recessed: 13.5" x 17.5" Typical Wall Thickness .110 Material: High Impact Polystyrene All Color Non-Toxic 1.5 Notched Izod (minimum) Specific Gravity 1.05, 73°/28° F Heat Deflection Annealed, 264 psi 185 Vicat Softening Point, °F 202 °C 94 Tensile Strength at yield (2.0 in/min) psi 3400 Ultimate Elongation % (0.2 in/min)(5mm/min) 35 Flexular Modulus (0.05 in/min) psi 300,000 Hardness, Rockwell M 20 Izod Impact, 1/4" – 8.4 mm @ 78°F/23°C 1.4 ft.-lb. 75 J/m |

97 Series Plastic(Polystyrene) Recessed or Surface Mounted Cabinet

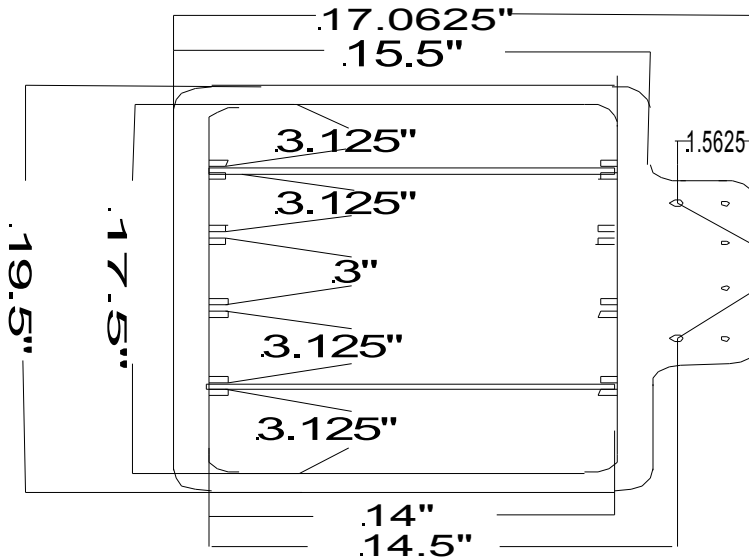

**For Recessed Install
Use #10 x 2.5" Screws
Both screws should be
fastened to stud
For Surface Mounted Install
Use #10 x 5" Screws**

**Storage Depth(3.5") Covers up 15.5" x 19.5"
2 White Adjustable Polystyrene Shelves
1 Fixed White Polystyrene shelf
R.O.(13.5" x 17.5"x 2.375")
Requires 1/2" Offset**