




LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL#DEV-B8003-PN

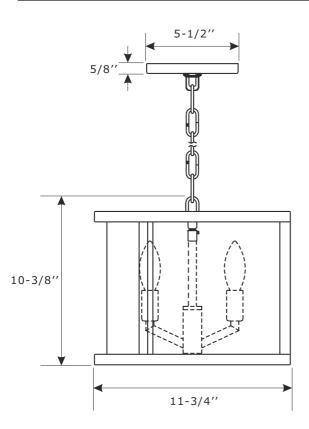







All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 3- Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE This fixture is Damp rated

How to install

For hanging:

- 1. Remove the spoke and light cluster from the metal frame by loosening the nuts.
- 2. Slip the glass shade into the bottom of metal frame.
- 3. Put the light cluster and spoke back into the metal frame and secure with the nuts.

For ceiling:

- 1. Remove the spoke and light cluster from the metal frame by loosening the nuts.
- 2. Slip the glass shade into the bottom of metal frame.
- 3. Remove the loop and nipple from top of spoke and screw the canopy with 2-hole into the swivel on the light cluster.
- 4. Put the light cluster and spoke back into the metal frame and secure with the nuts.
- Thread the mounting screws into the matching holes of the mounting bar, and tighten with the hex nut.
- 6. Secure the mounting bar to the outlet box with the outlet box screws.
- Raise canopy allowing the mounting screws to protrude through the holes in the canopy, and secure with the finials.
- ${\bf 8.\ Install\ the\ bulb (not\ included)\ into\ socket.}$



LIGHTING THE WAY FOR SIXTY YEARS


PART NUMBER MODEL#DEV-B8003-PN

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy (center hole) W5-1/2"xH5/8" #XRF8003PNCANH
- C. (1)-Collar Loop
- D. (1)-Collar ring
- E. (1)-Chain -L72", 4mm thick #XRF8003PNCHA4MM
- F. (1)-Loop
- G. (1)-Spoke
- H. (3)-Nut
- I. (3)-Socket
- J. (1)-Light cluster
- K. (1)-Glass shade #XRF8003GLASHA
- L. (1)-Metal frame
- M. (1)-Canopy with 2-hole #XRF8003PNCANC
- N. (2)-Finial #XRF8003PNFIN
- O. (1)-Swivel
- P. (1)-Metal washer

FOR HANGING:

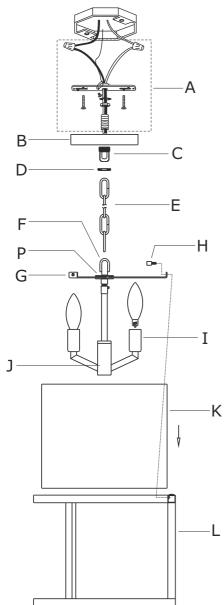

FOR CEILING:

