



FLOOR

BEE HIVE™
COLORBODY™ PORCELAIN

 **daltile®**
IMAGINE WHAT'S POSSIBLE™



Cover photo features Bee Hive™ 24 x 20 decorative accents in the cool blend on the floor and Black 24 x 20 hexagon on the wall. Above photo features Bee Hive™ Ashgrey 24 x 20 hexagon on the floor.

Design the Hive

USAGE

Floors Walls Countertops

F W C

From fashion to flooring, geometrics ignite imaginations. Bee Hive™ delivers a monumental 24 x 20 hexagon that brings new visual interest to monochromatic fields. This durable ColorBody™ porcelain is ready to enliven floors and walls with custom patterns created by mixing the six neutral hues found in Bee Hive with four geometric decorative patterns in warm and cool blends.

- A NEW ANGLE ON DESIGN
 - Large-format 24-inch hexagon shape makes a dynamic statement
 - Mix and match six solid colors with four decorative patterns, available in warm and cool blends, for truly standout designs
- A HIGH LEVEL OF FLEXIBILITY
 - Appeals to classic and contemporary designs
 - Use on both floors and walls for visual impact
 - Ideal for creating fresh looks in both commercial and residential settings

PRE-CONSUMER RECYCLED MATERIALS

All or select items within this series meet the requirements for these qualifications. For more information visit daltile.com.


CERTIFIED
ORCELAIN[™]
TILE
0.5% or less water absorption

Professional
TILE SOLUTIONS


FLOOR TILE – SOLID COLORS



WHITE P006

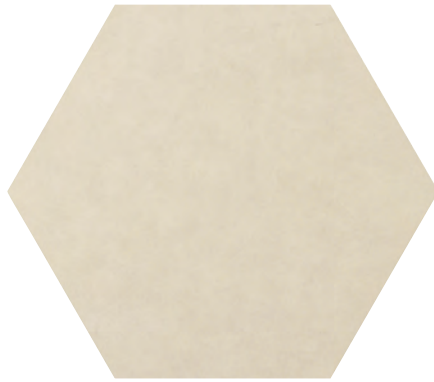


IVORY P007

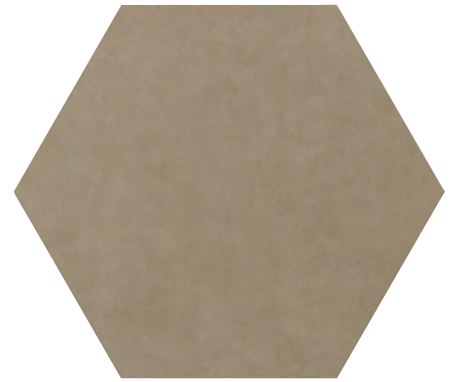

TAUPE P008



ASHGREY P009

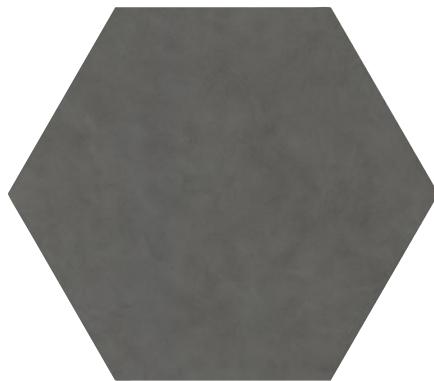

GREY P010



BLACK P011

FLOOR TILE – WARM DECORATIVE ACCENTS



WARM
HONEYCOMB P012



WARM
PLOT P013



WARM
RUN-UP P014



WARM
TARGET P015

FLOOR TILE – COOL DECORATIVE ACCENTS



COOL
HONEYCOMB P016



COOL
PLOT P017



COOL
RUN-UP P018




COOL
TARGET P019

BEE HIVE™

COLORBODY™ PORCELAIN

SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	24 x 20 Floor Tile	(23-5/8" x 20-3/8") (60.00 cm x 51.75 cm)	3/8"	10.12	4

APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:


Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

TRIM

Type	Number	Size	Pieces per Carton
 Bullnose	S-43C9	3 x 12	30

Bullnose trim is intended to coordinate with floor field tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)	 Medium (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.

7834 C. F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2018 Daltile (7/18)