


DELTA

BAR & PREP SINK FAUCETS

- Single Handle
- Waterfall® Series
- Deck Mount
- Two Hole Sink Applications
- Quick Snap® Hose Installation

Submitted Model No.: _____

Specific Features: _____

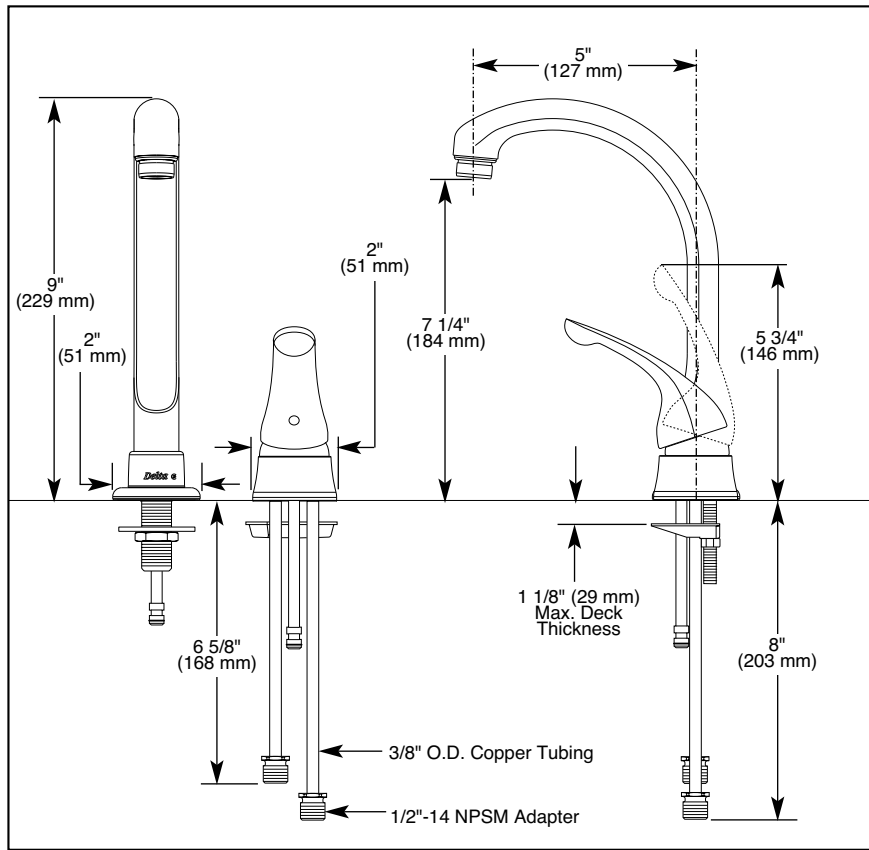

LISTED
UL Listed to US and Canadian
Safety Standards and Classified
in accordance with
ANSI/NSF 61
21PL




COMPLIES WITH:

- ASME A112.18.1
- CSA B125
- NSF 61
- Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified

STANDARD SPECIFICATIONS:

- Single handle deck faucets for mounting on two hole sinks.
- Solid fabricated brass body.
- Requires minimum 1 1/2" (38 mm) diameter hole.
- 5" (127 mm) long, 9" (229 mm) high spout swings 360°.
- Lever handle shall return to neutral position when faucet is turned off.
- Red and blue button on handle to indicate hot/cold temperature.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- All operating parts shall be replaceable from the top.
- 3/8" O.D. straight, staggered copper supply tubes - 6 5/8" (168 mm) and 8" (203 mm) long - with 1/2"-14 NPSM adapters.
- Quick Snap® hose installation.

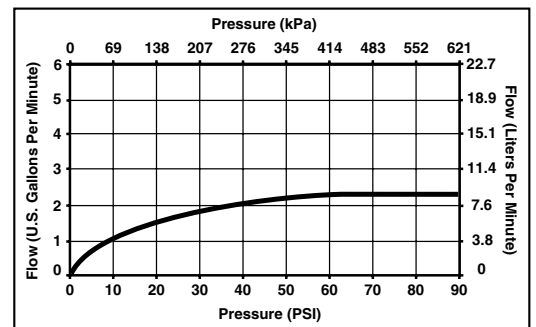

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only.

Standard Features	190	190-BS	190-CB	190-NN	190-PB	190-SS	190-WH
Washerless	◆	◆	◆	◆	◆	◆	◆
Two Hole Installation	◆	◆	◆	◆	◆	◆	◆
Required Minimum 1 1/2" (38 mm) Diameter Hole	◆	◆	◆	◆	◆	◆	◆
5" (127 mm) Long, 9" (229 mm) High Spout Swings 360°	◆	◆	◆	◆	◆	◆	◆
Lever Handle with Red/Blue Indicators	♿	♿	♿	♿	♿	♿	♿
3/8" O.D. Straight, Staggered Copper Supply Tubes - 6 5/8" (168 mm) and 8" (203 mm) Long	◆	◆	◆	◆	◆	◆	◆
1/2"-14 NPSM Adapters	◆	◆	◆	◆	◆	◆	◆
Chrome Finish	◆						
Biscuit Finish		◆					
Chrome & <i>Brilliance</i> ® Polished Brass Finish			◆				
<i>Brilliance</i> ® Pearl Nickel Finish				◆			
<i>Brilliance</i> ® Polished Brass Finish					◆		
<i>Brilliance</i> ® Stainless Finish						◆	
White Finish							◆

Available Options for Field Conversion:

- Thick Deck Mounting Kit for 2-1/2" (64 mm) maximum thick decks. Order RP32638.



Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2002 Masco Corporation of Indiana