



Tub and Shower

TRIM ONLY for Tub and Dual Shower unit w/standard 24" Slide Bar handshower and shower diverter valve with diverter spout-backflow protection provided by two integral check valves in handshower-requires separate order of R10700-UNWS Rough-in

Model No: T13H982-25



- ASME A112.18.1 / CSA B125.1
- Pressure Balance Valve ASSE 1016
- Indicates compliance to ICC/ANSI A117.1
- Pressure Balance and Diverter lever handles ADA compliant to ICC/ANSI A117.1/ADA
- Handshower backflow protection provided by two integral certified check valves in series, which operate independently, ASME A112.18.3
- Handshower ADA compliant to ICC/ANSI A117.1/ADA
- (Contact Delta Representative for State and/or Local Approvals)

- Polished chrome plated finish - Pressure Balance cartridge - Temperature only controlled with handle - Field adjustable to limit handle rotation into hot water zone
- Integral checks in the cartridge prevent crossflow between Hot and Cold water inlets
- Non-Removable Blue/Red visual cover indicator for Cold, Mixing and Hot handle positions

OPERATION:

- Standard 24" Slide Bar handshower and shower diverter valve with diverter spout-backflow protection provided by two integral check valves in handshower
- **NOTE FOR SHOWER #6: Not for use as anti-ligature device**
- Handshower ADA Compliant Diverter handle and OPTIONAL Handshower #2
- Handshower MAX: 1.5 GPM @ 80 PSI (5.7 L/min @ 552 kPa)
- Handshower MIN: 1.13 GPM @ 45 PSI (4.3 L/min @ 310 kPa)
- Plumbing Codes require that showerheads and handshowers provide a small, but continuous flow of water (trickle) when in "PAUSE" mode.
- Spot: 1/2" S metal spout with pull up diverter
- Because of this continuous flow, in certain circumstances pressure changes in the water line and handle - Adhesives in the shower temperature control handle while in "PAUSE" mode could result in dramatic changes to the temperature of the water when the shower head or hand shower is returned to the "ON" position.
- #8 Shower - H₂Okinetic Technology™ Showerhead, Arm & Flange
- ALWAYS point the shower head away from yourself when returning to the "ON" position and feel the water with your hand before resuming your shower.
- #8 Shower Flow Rate MAX: 1.5 GPM @ 80 PSI (5.7 L/min @ 552 kPa)
- #8 Shower Flow Rate MIN: 1.13 GPM @ 45 PSI (4.3 L/min @ 310 kPa)
- #8 Shower Flow Rate MAX: 1.5 GPM @ 80 PSI (5.7 L/min @ 552 kPa)
- #8 Shower Flow Rate MIN: 1.13 GPM @ 45 PSI (4.3 L/min @ 310 kPa)
- Option of 3/16" (4.8) stainless steel sliding bar or replace standard bar with use the "PAUSE" function.

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced September 28, 2015.


Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced September 28, 2015.

Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030

Model No: T13H982-25

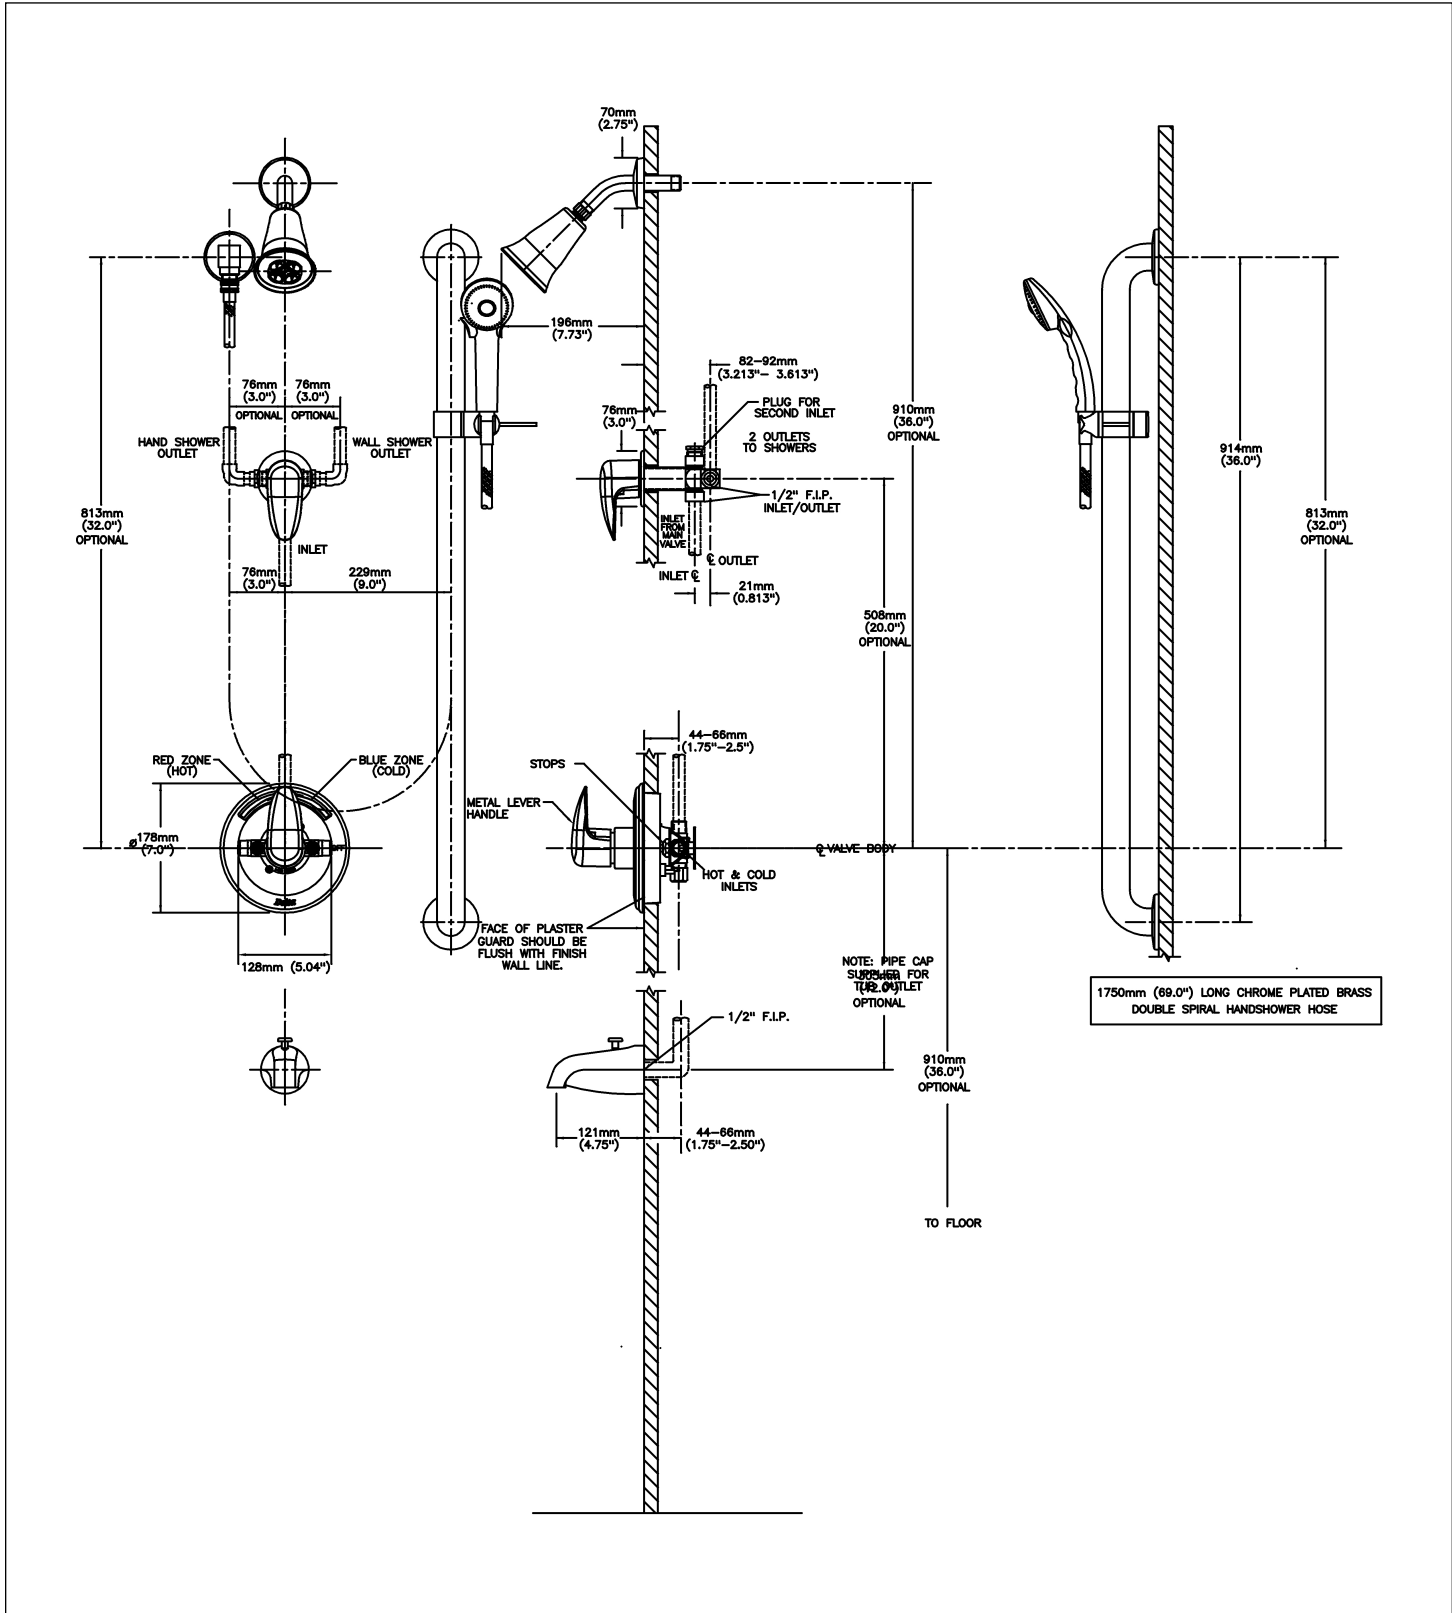

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced September 28, 2015.

Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
 Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030