



Description

8" (203 mm) rigid spout with top/bottom brace (distance from wall to spout outlet with spout end vacuum breaker), cast body, vandal-resistant hooded lever handle, red/blue indicators, integral check stops, CER-TECK® cartridges, pail hook, garden hose end outlet and spout end vacuum breaker w/hose and hanger.

Specification

- · 8.0" (203 mm) centers cast brass wall mount sink faucet
- Two handle
- Polished chrome plated finish •
- · With integral check stops
- Heavy Duty 1/2" IPS Brass pipe rigid pail hook spout
- CER-TECK[®] 1/4 turn ceramic disk cartridge
- Spout #1 8.25" (210mm) plain spout (from wall to spout outlet) with top/bottom brace
- Outlet #7 Spout End Vac Breaker w/Hose 48" (121.9 cm) Hose and Stainless Steel Hanger
- Handle #3 3.0" (76 mm) Lever Blade Handles, ADA Compliant, Metal, Color indexed, Vandal Resistant screws

Features

• Designed for routine 180°F (82°C) disinfection cycles up to 30 minutes.

8.0" (203 mm) Wall Mount Service Sink Faucet with Integral Check Stops **28C8173**



Complies With


- ASME A112.18.1/CSA B125.1
- ASSE 1011 and CSA Standard B64.2
- ICC/ANSI A117.1



WARNING Not for potable water.

(Contact Delta Representative for State and/or Local Approvals)

NOTICE Dimensions are for reference only. Measurements may vary ± 0.25" (6 mm).

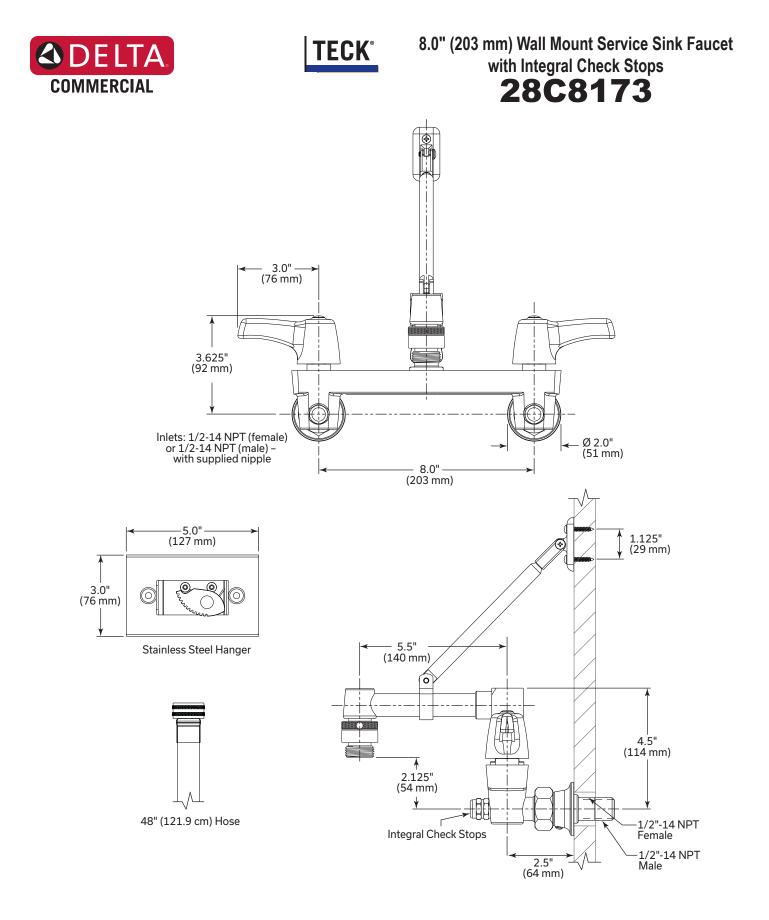

NOTICE Dimensions are for reference only. Measurements may vary ± 0.25" (6 mm).

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. See current full-line price book for finish options and product availability. This spec was produced on February 14, 2024.

Masco Canada Limited 350 South Edgeware Rd, St Thomas, Ontario, Canada N5P 4L1 1-800-387-8277