


Submitted Model No.: _______Specific Features:

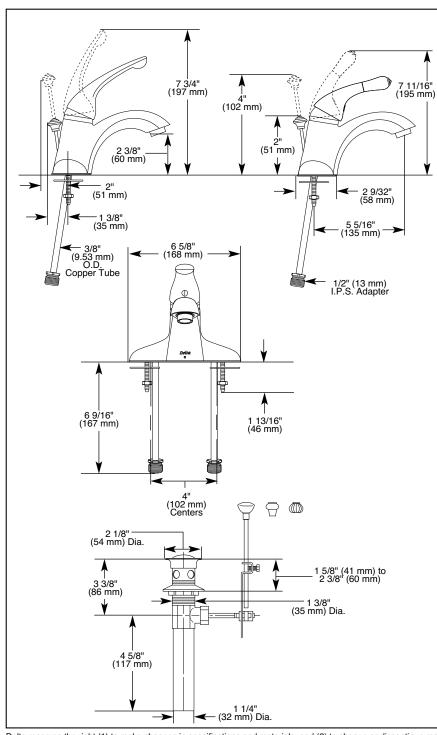

ODELTA.

LAVATORY FAUCETS

- Single Handle
- Innovations® Series
- Deck Mount
- 3 Hole Sink Applications
- 4" Centerset








COMPLIES WITH:

- ASME A112.18.1M-1996
- CSA B125-93
- Indicates ADA compliance to CABO/ANSI A117.1-1992
- IAPMO Listed
- CSA Certified

STANDARD SPECIFICATIONS:

- Single handle lavatory deck faucets for exposed mounting on three hole sinks.
- 4" (102 mm) centerset.
- Solid brass fabricated body.
- 5 5/16" (135 mm) long spout.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Control handle shall return to neutral position when valve is turned off.
- Models have 3/8" O.D. copper supply tubes -5 13/16" (148 mm) long with 1/2"-14 NPSM adapters.
- Models have metal drain with pop-up type fitting with plated flange and stopper.



Standard Features	540-WFMPU	540-CBWF	540-PBWF	540-WHWF	541-CBWF	541-PBWF	541-WF	544-WFACL	544-PBWFACL	544-WFMPU	544-WFAWH	544-CBWF	544-PBWF	544-PBWFAWH	544-WHWF
Washerless	*	♦	•	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	•
Two Hole Installation					*	♦	•								
Three Hole Installation	•	♦	•	•	*	•	•	*	•	♦	•	•	•	•	•
4" (102 mm) Centerset	*	♦	•	•	*	•	♦	*	♦	♦	•	•	•	•	•
5 5/16" (135) Long Spout	*	♦	•	•	*	•	♦	*	♦	♦	•	•	•	•	♦
Lever Handle	Ł	Ł	Ė	Ė	Ġ	F	Ŗ	Ė	Ġ	Ė	Ł	Ė	Ė	Ł	Ė
Red/Blue Handle Indicator								*	♦	♦	•	•	•	•	•
Clear Handle Accent								*	•						
White Handle Accent											•			•	
3/8" O.D. Copper Supply Tubes- 5 13/16" (148 mm) Long with 1/2"-14 NPSM Adapters	*	•	*	*	*	•	*	•	•	*	•	•	*	•	•
No Lift Rod Hole in Escutcheon					♦	•	•								
Metal Pop-Up Drain	♦	♦	•	•				*	♦	♦	•	•	•	•	♦
Chrome Finish	♦						•	♦		♦	•				
Chrome and <i>Brilliance™</i> Polished Brass Finish		•			*							•			
Brilliance™ Polished Brass Finish			•			•			♦				•	•	
White Finish				•											♦

