



Model No: 27C2945-LS

## **COMPLIES WITH:**

- Verified to <0.25% Pb average wetted surface regulations</li>
- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- (Contact Delta Representative for State and/or Local Approvals)
- 152 mm (6") Wrist Blade Handle ADA compliant and meets Handicapped Accessibility Standard ICC/ANSI A117.1 of less than 5 lbs operating force





## **NOTES:**

Verified to <0.25% Pb average wetted surface regulations

CA/VT Compliance:

This COMPLETE SERIES is ONLY available as CA/VT Compliant product as of Nov. 1, 2009.

The Product Numbers have NOT changed.

**Sink Faucet Deckmount** 

· Below deckmount sink faucet

SPECIFICATION:

- 203 mm (8") centers, two handle
- Polished chrome plated finish
- Cast brass bodies

structures

- Metal hold-down package
- CER-TECK® ceramic structures
- Spout#: 9 Gooseneck spout-6.0" radius- 10.4" height (unmounted)-Standard rigid/swivel field installation unless LS Limited swing option selected- Vandal resistant .090" wall thickness-(R4)

8" deck LESS hose and spray - CER-TECK® ceramic


- Outlet#: 4 Standard 1.5 GPM (5.7 L/Min) Flow Control Aerator
- Handle#: 5 152 mm (6") Wrist Blade Handles-ADA Compliant- Sanitary Hoods-Metal-Color indexed-Vandal resistant screws
- 120 degrees limited swing of spout (LS)

## **OPERATION:**

Not Available

(Dimensional drawing on following page)



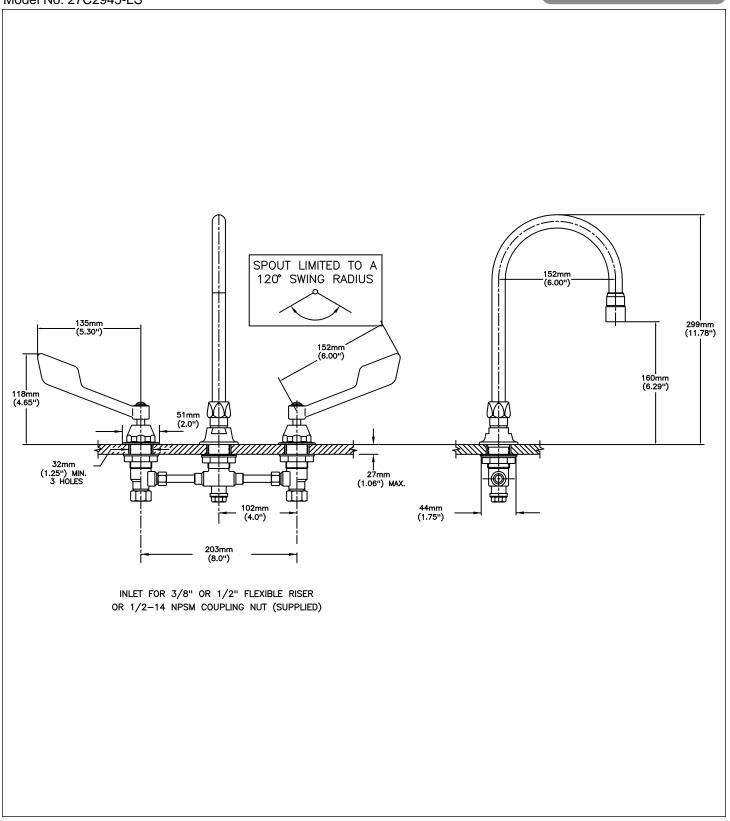

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced July 18, 2013.