


ROOM AIR CONDITIONERS

CASEMENT • WINDOW • THROUGH THE WALL

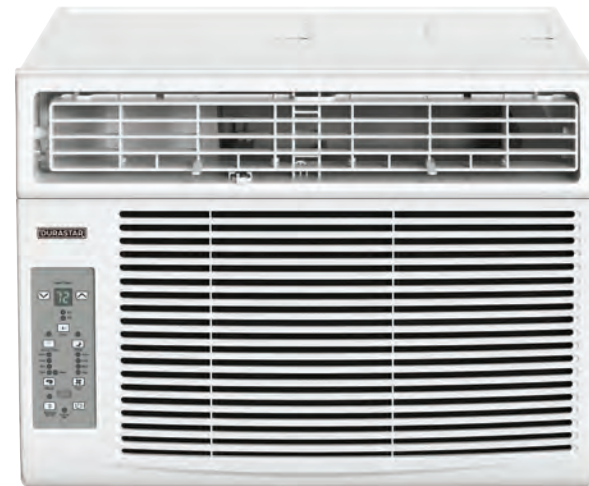


65

Digital Display




24-Hour Timer




Three Fan Speeds




Dehumidifying Mode



Remote Control



Easy-Clean Air Filter



Adjustable Louvers

SPECIFICATIONS:

Model	Cooling Coverage Area(Sq Ft)	Cooling BTUs	Heating BTUs*	Voltage	Amps (Cooling / Heating)	CEER	CFM (High / Med /Low)	Decibels(High / Med /Low)	Moisture Removal (Pints/hr)	Thermostat Range	Heater	Heater Type	Plug Type	Refrigerant	Product Dimensions (W x D x H)	Minimum Window Height	Window Width (Min - Max)
WINDOW AIR CONDITIONERS:																	
DRWHC081XNA1	300 - 350	8,000	3,500	115V	8.9 / 12	10.9	248 / 231 / 202	60 / 56.5 / 55	1.90	62-90°F	✓	Electric Heat Strip	NEMA 5-15P	R-32	21 7/16" x 19" x 14 5/8"	16 1/2"	26 13/16" - 36"
DRWHC122XNA1	450 - 550	12,000	11,000	208-230V	6.1 / 15.7	10.9	279 / 255 / 223	60.9 / 58.3 / 54.7	3.17		✓		NEMA 6-20P		21 7/16" x 19" x 14 5/8"	16 1/2"	26 13/16" - 36"
DRWHC182XNA1	700 - 1,000	18,800	16,000	208-230V	9.8 / 21.9	10.7	446 / 388 / 329	68.5 / 67 / 64.5	5.50		✓		NEMA 6-30P		23 5/8" x 25 3/8" x 17 15/16"	18 1/2"	28" - 40 1/2"
DRWHC232XNA1	1200 - 1400	23,200	16,000	208-230V	13.5 / 22	9.4	523 / 485 / 445	68 / 65.5 / 63.5	7.60		✓		NEMA 6-30P		23 5/8" x 25 3/8" x 17 15/16"	18 1/2"	28" - 40 1/2"
DRWAC081XNA1	300 - 350	8,000	-	115V	8.4	10.9	196 / 165 / 148	59 / 55.5 / 53.5	2.00		✗	-	NEMA 5-15P		18 9/16" x 15 3/4" x 13 3/8"	14"	23" - 36"
DRWAC101XNA1	400 - 450	10,000	-	115V	9.4	10.9	300 / 266 / 240	59.5 / 55 / 53	2.20		✗	-	NEMA 5-15P		21 7/16" x 19" x 14 5/8"	15 1/2"	23" - 36"
DRWAC121XNA1	450 - 550	12,000	-	115V	10.03	10.9	319 / 273 / 248	60.5 / 57 / 55	3.30		✗	-	NEMA 5-15P		21 7/16" x 19" x 14 5/8"	15 1/2"	23" - 36"

CASEMENT AIR CONDITIONERS:

DRCAC101XNA1	400 - 450	10,000	-	115V	8.5	10.4	324 / 294 / 265	67.5 / 65 / 62.5	2.40	62-90°F	✗	-	NEMA 5-15P	R-32	14 9/16" x 23 1/2" x 20 7/8"	20 5/16"	15 1/2" - 16 1/4"
--------------	-----------	--------	---	------	-----	------	-----------------	------------------	------	---------	---	---	------------	------	------------------------------	----------	-------------------

THROUGH THE WALL AIR CONDITIONERS:

																Wall Sleeve Cutout Dimensions (W x D x H)
DRTHC081XNA1	300 - 350	8,000	4,200	115V	9.4 / 11	9.6	270 / 235 / 202	63.5 / 59.7 / 55.9	1.50	62-90°F	✓	Electric Heat Strip	NEMA 5-15P	R-32	24 1/4" x 20 1/4" x 14 1/2"	25 1/2" x 17 1/2" x 15 1/4"
DRTHC102XNA1	400 - 450	10,000	10,600	208-230V	5.4 / 15	9.6	293 / 275 / 253	62.2 / 60.3 / 58	2.40		✓		NEMA 6-20P		24 1/4" x 20 1/4" x 14 1/2"	25 1/2" x 17 1/2" x 15 1/4"
DRTHC122XNA1	450 - 550	12,000	10,600	208-230V	6.5 / 15	9.5	286 / 264 / 240	65.4 / 63.2 / 61.1	3.30		✓		NEMA 6-20P		24 1/4" x 20 1/4" x 14 1/2"	25 1/2" x 17 1/2" x 15 1/4"
DRTHC142XNA1	550 - 700	14,000	10,600	208-230V	7.9 / 15	9.5	282 / 262 / 235	69.8 / 67.2 / 64.8	4.40		✓		NEMA 6-20P		24 1/4" x 20 1/4" x 14 1/2"	25 1/2" x 17 1/2" x 15 1/4"
DRTAC081XNA1	300 - 350	8,000	-	115V	7.08	9.6	267 / 231 / 200	63.6 / 59.4 / 55.9	1.60		✗	-	NEMA 5-15P		24 1/4" x 20 1/4" x 14 1/2"	25 1/2" x 17 1/2" x 15 1/4"
DRTAC101XNA1	400 - 450	10,000	-	115V	8.69	9.6	251 / 219 / 182	64.3 / 60.1 / 57.2	2.50		✗	-	NEMA 5-15P		24 1/4" x 20 1/4" x 14 1/2"	25 1/2" x 17 1/2" x 15 1/4"
DRTAC102XNA1	400 - 450	10,000	-	208-230V	4.59 / 4.9	9.6	275 / 240 / 209	68.5 / 66.7 / 64.4	2.70		✗	-	NEMA 6-15P		24 1/4" x 20 1/4" x 14 1/2"	25 1/2" x 17 1/2" x 15 1/4"
DRTAC121XNA1	450 - 550	12,000	-	115V	11.04	9.5	286 / 264 / 240	68.7 / 65.3 / 62	3.50		✗	-	NEMA 5-15P		24 1/4" x 20 1/4" x 14 1/2"	25 1/2" x 17 1/2" x 15 1/4"
DRTAC122XNA1	450 - 550	12,000	-	208-230V	5.22 / 5.57	9.5	278 / 258 / 235	68.3 / 66.7 / 63.9	3.60		✗	-	NEMA 6-15P		24 1/4" x 20 1/4" x 14 1/2"	25 1/2" x 17 1/2" x 15 1/4"
DRTAC142XNA1	550 - 700	14,000	-	208-230V	7.0 / 7.7	9.5	296 / 275 / 253	69.9 / 68 / 65.9	4.40		✗	-	NEMA 6-15P		24 1/4" x 20 1/4" x 14 1/2"	25 1/2" x 17 1/2" x 15 1/4"




*Please Note: Units with a heater function provide supplemental heat only and are not meant as a replacement for central heating systems.

*Wall Sleeve Sold Separately - Part Number: DRWTCSLV

Wall Sleeve is for Through The Wall units ONLY. Window and Casement units have louvered sides and rear that need proper outside ventilation and airflow.

WARRANTY : 2-Year Limited Parts and Labor (See product manual for full warranty information)

PLUG TYPES:

MODELS	PLUG TYPE	APPEARANCE
DRWHC081XNA1 DRWAC081XNA1 DRWAC101XNA1 DRWAC121XNA1 DRCAC101XNA1 DRTHC081XNA1 DRTAC081XNA1 DRTAC101XNA1 DRTAC121XNA1	NEMA 5-15P	
DRTAC102XNA1 DRTAC122XNA1 DRTAC142XNA1	NEMA 6-15P	
DRWHC122XNA1 DRTHC102XNA1 DRTHC122XNA1 DRTHC142XNA1	NEMA 6-20P	
DRWHC182XNA1 DRWHC232XNA1	NEMA 6-30P	