IVING

Collection: Hang


Installation manual for:

LD6103D37 D37"H13.5" L6

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws (P2) in side of top unit the mounting bracket.
- 6. Put the lamp arm(P18) to the corresponding postion.
- 7. Screw the middle rod (P11) to the lamp body then connect to the chain (P8) and connect the canopy lock(P7).
- 8. Put the canopy (P3) on the nipple (P4) and connect the canopy lock (P7), then use the canopy ring(P6) to screw tighten.
- 9.Install E12 light source, no include bulb.
- 10.Install the shade (P22) to the bulb.

The end!

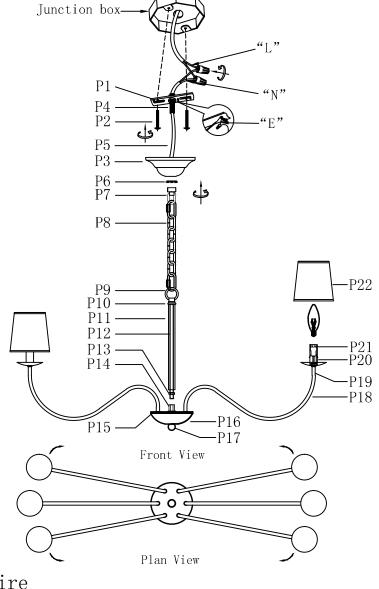

''L'' = Hot wire"N" = Neutral wire

"E" = Ground wire

PARTS LIST

part	picture	Description	Qty	Check	list
P1		L4" Mounting bracket	1		
P2		5/32-32 Screw	2		
P3		D5.1" Canopy plat	1		
P4		Nipple	1		
P5		Power Cord 8', 18AWG, SPT-1 Gold/Black	1		
P6	(10-11-1 1)	Canopy ring	1		
P7		Canopy lock	1		
P8		L5'CHAINO4P Plain Design	1		
Р9	Q	D2. 5" Loop	1		
P10		Check ring	2		
P11		D0.75"*L9.85" Tube	1		
P12		Nipple	1		
P13	8	Hex nut	14		
P14		Hickey	1		
P15		D4.75" Around metal plate	1		
P16		D4.85" Receiver bowl	1		
P17	0	Cap nut	1		
P18		L15.15" Arm	6		
P19		D3" Lamp holder	6		
P20		DO.87"*L2.15" Candle cover	6		
P21		E12 Socket	6		
P22		D4.5"*H4.5" Lamp shade	6		