DISTRICT

Collection:Rye Installation manual for:


LD7310W5BLK W4.9"*E7.4" H8.1" L1

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Install the lamp body to the mounting bracket by screws(P3).
- 6.Locking the glass shade(P11) on the lamp body by socket rings(P8).
- 7.Install E26 light source.(Bulbs not supplied).

The end!



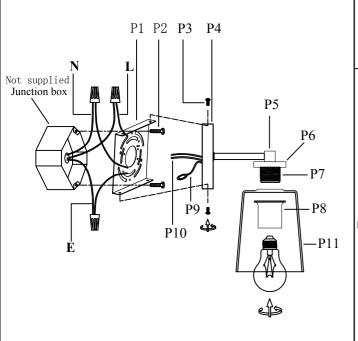

Part Number	Part	Picture	Description	Qty
MB7S05	P1		Mounting bracket L4.5"*W4.5"	1
	P2		Mounting bracket screw	2
P-LD7310W5BLK-1	P3	ı	Screw	4
	P4		Backplate (L4.7"*W4.7")	1
	P5		Lamp arm(W4.6"*H0.8")	1
	P6		Socket Cup (Φ2.5"*H0.4")	1
	P7		E26 holder	1
	P8		Socket rings	1
	P9		UL18#Ground wire,L9.8"	1
	P10		UL18#,L8"	1
GS7R08	P11		Glass shade (Φ4.9"*H5.9")	1
				-

"L" = Hot wire "N" = Neutral wire

"E" = Ground wire