




Collection:Miller

Installation manual for:

OD312P16BK L7" H16" E7" L1

Installation instructions:

- 1.Put glass(P15)into body(P4)
2. Use socket ring(P5) to lock in glass
- 3.Install E26 light source.(Bulbs not supplied) .
- 4.Connect body and plate(P8) with screw to lock in
- 5.Black wire from ceiling(junction box) attaches to "L"wire from the fixture
- 6.White wire from ceiling(junction box) attaches to "N"wire from the fixture
- 7."E" wire from the ceiling attaches to "E" wire from the fixture.
- 8.Use explosion screw to fix location and use explosion screw(P1) to screw base(P2).
- 9.Put lamp pole(P11) into base(P2) and use screw (P12) to lock in

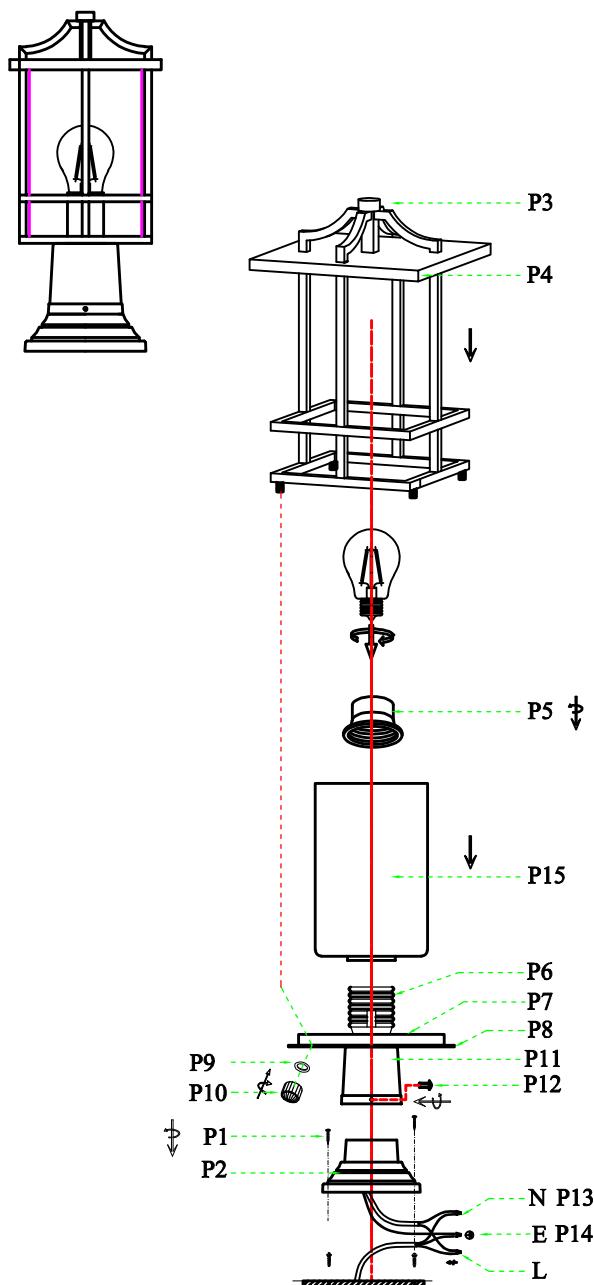

Part Number	Part	Picture	Description	Qty
LB12P01	P1	↑↑	Explosion screw M4	4
	P2		5.5" * 2.95" Lamp base	1
	P3		Ø20*12MM Column parts	1
	P4		175*175*266MM Body	1
	P5		Socket ring	1
	P6		E26 Holder	1
	P7		135*135*10MM Box	1
	P8		154*154*T1.5MM Plate	1
	P9		Rubber ring	2
	P10		Screw cap	2
	P11		lamp pole (3.38" * 3.22")	1
	P12		Screws M4	3
	P13		UL18#,L11.8"Black+White	1
P-OD312P16BK-1	P14		UL18#Ground wire,L9.8"	1
	GS12L8		130*130*205MM Glass	1
	P15		130*130*205MM Glass	1

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire