


Collection: Carlisle

Installation manual for:

OD325H17BK L9" W9" H16.5" L3

Installation instructions:

1. Install tube(P17) on lamp holder
2. Install E12*3 light source. (Bulbs not supplied)
3. Put glass(P26) into body(P24) and stick sponge on clips(P23). Finally curve clips to fix glass.
4. Connect cover(P15) with body(P24) and screw cap(P11) to lock in
5. Use hook(P10) connect(P13). Twist off screw and mat from the hanging ring(P8) and across the middle hole of canopy(P5) and use screw and mat lock in again.
6. Black wire from ceiling(junction box) attaches to "L" wire from the fixture
7. White wire from ceiling(junction box) attaches to "N" wire from the fixture
8. "E" wire from the ceiling attaches to "E" wire from the fixture.
9. Screw (P2) through to canopy hole(P5) and then put rubber ring(P6) and twist screw cap(P7) to fix mounting bracket(P3).

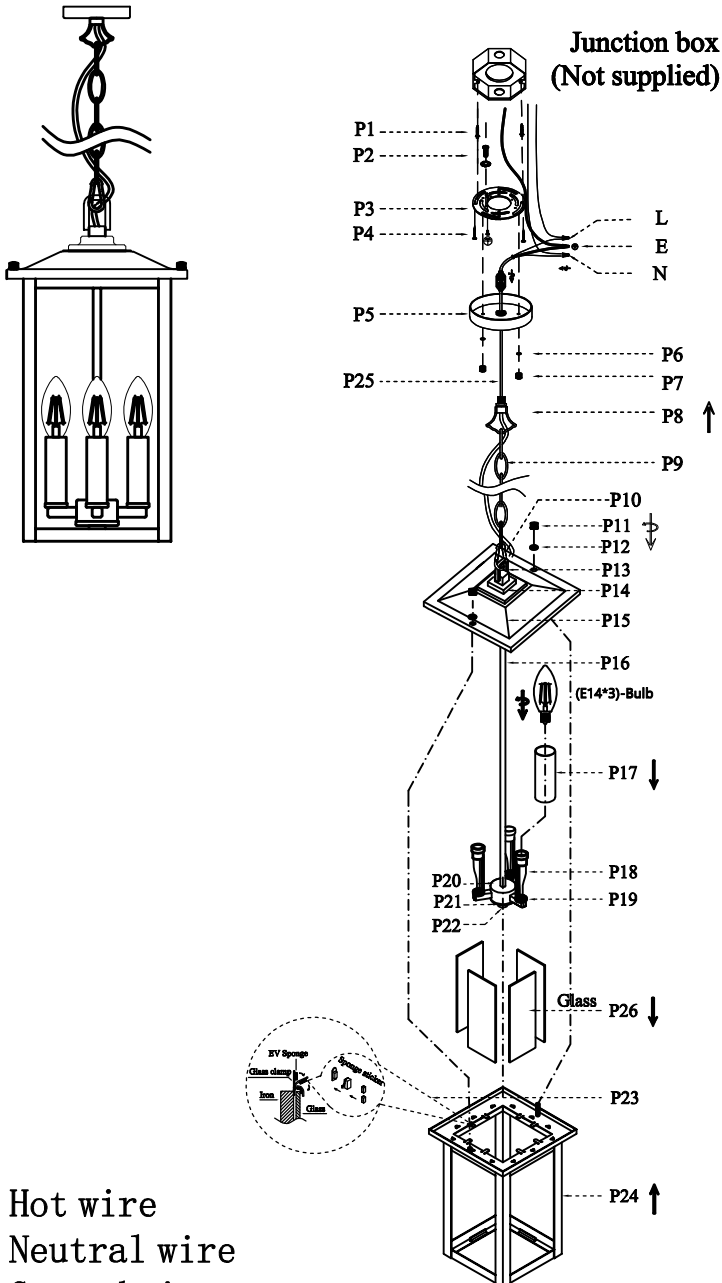

"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire

Part Number	Part	Picture	Description	Qty
CP12H01BK	P1		Explosion screw	2
	P2		Screws M4	2
	P3		Mounting bracket Ø3.94	1
	P4		Screws M4	2
	P5		Canopy(Ø 4.7*0.78")	1
	P6		Rubber ring	2
	P7		Screw cap	2
Chain04PBK	P8		Hanging rings L1.57*W0.59*H1.57"	1
	P9		Chain (L39")	1
	P10		Hook (L1.57*W0.78*H0.15")	1
P-OD325H17BK-1	P11		Screw cap	2
	P12		Rubber ring	2
	P13		32*50MM Ring	1
	P14		70*70*18MM Cap	1
	P15		220*220*33MM Cover	1
	P16		Ø9.3*300MM Tube	1
	P17		Ø22*H90MM Tube	3
	P18		E12 Holder	3
	P19		Ø23*5MM Cover	3
	P20		L108*W94*H30MM Y-Box	1
	P21		Ø52*5MM Cover	1
	P22		Ø16*5MM Column parts	1
	P23		EV Sponge Sponge sticker	12
	P24		212*212*328MM Body	1
Cord-59-18#-BK	P25		UL18#, L59" Black	1
GP12L5	P26		L317*W167MM Glass	4