


Collection:Richmond

Installation manual for:

OD331W16BK W9.5" H16" E7.5" L3

Installation instructions:

- 1.Install tube(P11)on lamp holder
- 2.Install E12*3 light source.(Bulbs not supplied) .
- 3.Put glass(P22,P23)into Connect cover(P7) and stick sponge on clips(P8).Finally cruve clips to fix glass.
- 4.Put glass(P24,P25)into into body(P10) and stick sponge on clips(P9).Finally cruve clips to fix glass.
- 5.Connect cover(P7)with body(P10) and use rubber ring(P4) with screw caps to fixable.
- 6.Secure mounting bracket to the junction box
- 7.Black wire from ceiling(junction box) attaches to "L"wire from the fixture
- 8.White wire from ceiling(junction box) attaches to "N"wire from the fixture
- 9."E" wire from the ceiling attaches to "E" wire from the fixture.
- 10.Use rubber ring(P18)and screw(P19) to fix lamp with wall mounted

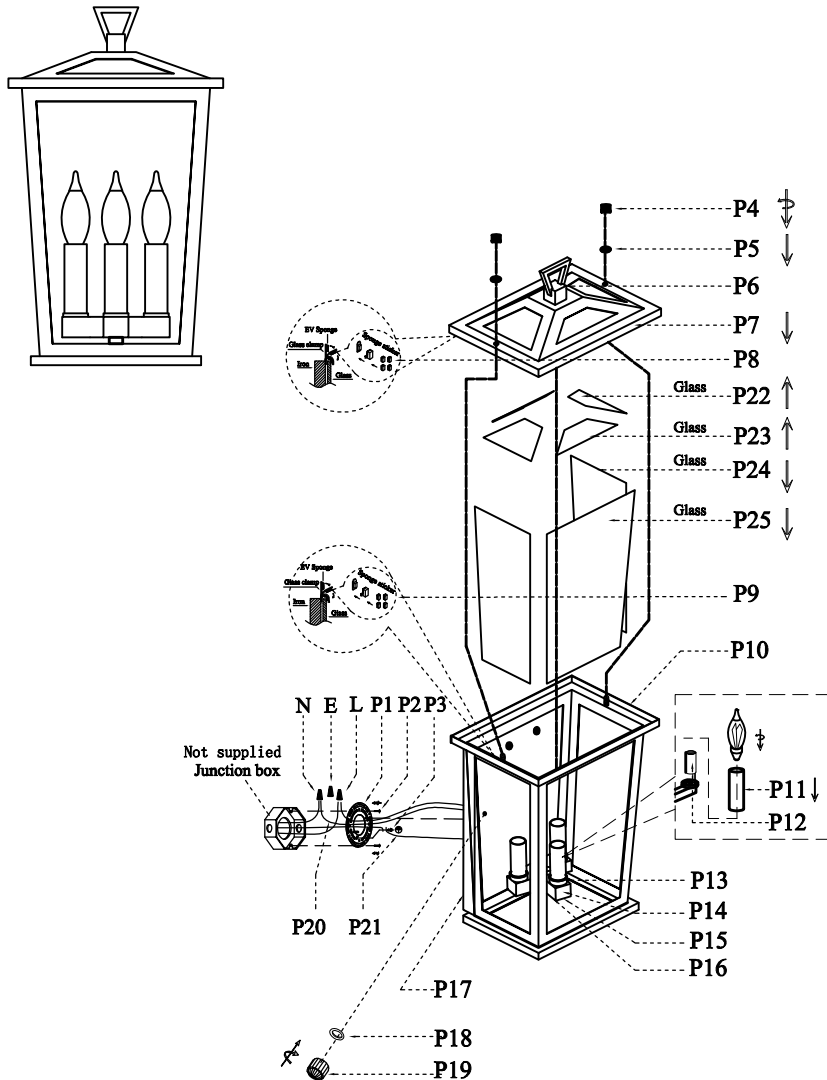

"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire

Part Number	Part	Picture	Description	Qty
MB12W01	P1		Mounting bracket Ø3.94	1
	P2		Mounting bracket screw M4	2
	P3		Screw M4	1
P-OD331W16BK-1	P4		Screw cap	2
	P5		Rubber ring	2
	P6		50*50*20 Ring	1
	P7		240*180*40MM Cover	1
	P8		EV Sponge Sponge sticker	12
	P9		EV Sponge Sponge sticker	9
	P10		235*175*319MM Body	1
	P11		Ø22*H80MM Tube	3
	P12		E12 Holder	3
	P13		Ø23*5MM Cover	3
	P14		120*74*23MM T-Box	1
	P15		117*71MM T-plate	1
	P16		Ø15*8MM Column parts	2
	P17		298*160*H25MM Box	1
	P18		Rubber ring	2
	P19		Screw cap	2
	P20		UL18#Ground wire,L9.8"	1
	P21		UL18#,L12"Black+White	1
GP12L12	P22		138*82MM Glass	2
	P23		192*55MM Glass	2
	P24		197*296MM Glass	2
	P25		137*296MM Glass	1