


## Collection: Cayman Installation manual for:

## OD332H12BK L7" W7" H12" L1

## **Installation instructions:**

- 1.Install E12 light source.(Bulbs not supplied)
- 2.Put glass(P20)into Connect cover(P14)and stick sponge on clips(P16).Finally curve clips to fix glass
- 3. Put glass (P21) into body (P18) and stick sponge on clips (P17). Finally curve clips to fix glass
- 4. Connect cover(P14) with body(P18) and use rubber ring(P11) with screw caps to fixable.
- 5.Use hook(P10)connect(P13). Twist off screw and mat from the hanging ring(P8) and across the middle hole of canopy(P5) and use screw and mat lock in again.
- 6. Secure mounting bracket to the junction box
- 7.Black wire from ceiling(junction box) attaches to "L"wire from the fixture
- 8. White wire from ceiling(junction box) attaches to "N" wire from the fixture
- 9."E" wire from the ceiling attaches to "E" wire from the fixture.
- 10. Screw (P2) through to canopy hole(P5) and then put rubber ring(P6) and twist screw cap(P7) to fix mounting bracket(P3).

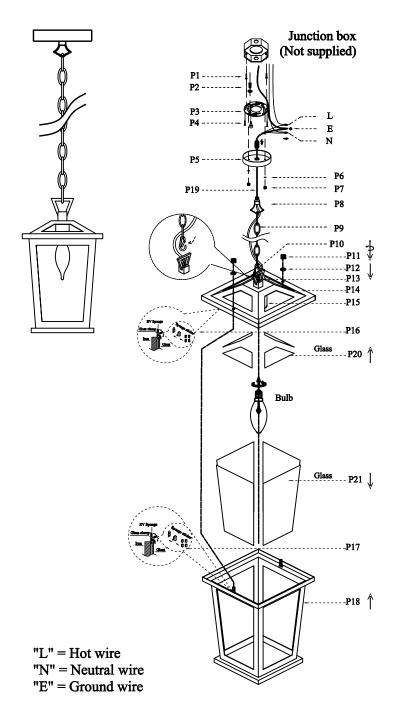

D . W 1	D 4	D:		٠.
Part Number	Part	Picture	Description	Qty
СР12Н01ВК	P1	1	Explosion screw	2
	P2	t	Screws M4	2
	Р3	0	Mounting bracket ø3.94	1
	P4	1	Screws M4	2
	P5	<b></b>	Canopy@4.7**0.78*)	1
	P6	0	Rubber ring	2
	P7		Screw cap	2
ChainO4PBK	P8	₿	Hanging rings L1.57"*W0.59"*H1.57"	1
	P9	\$	Chain (L39")	1
	P10	<b>(1</b> )	Hook (L1.57"*W0.78"*H0.15")	1
P-OD332H12BK-1	P11	•	Screw cap	2
	P12	<b>©</b>	Rubber ring	2
	P13		50*50*20 Ring	1
	P14		180*180*H40MM Cover	1
	P15		E12 Holder	1
	P16	0.0	EV Sponge Sponge sticker	12
	P17	00 0	EV Sponge Sponge sticker	12
	P18	<b>€</b>	175*175*219MM Body	1
Cord-59-18#-BK	P19	~	UL18#,L59*Black	1
GP12L13	P20		137*55MM Glass	4
	P21		137*196MM Glass	4