


Collection: Berks

Installation manual for:

OD333H15BK L8.5" W6" H14.5" L2

Installation instructions:

1. Install tube (P18) on lamp holder
2. Install E12*2 light source. (Bulbs not supplied)
3. Put glass (P26, P27) into cover (P14) and stick sponge on clips (P16). Finally curve clips to fix glass
4. Put glass (P28, P29) into body (P24) and stick sponge on clips (P23). Finally curve clips to fix glass
5. Connect cover (P14) with body (P24) and put rubber ring (P12) and screw caps (P11) to fixable.
6. Use hook (P10) connect (P13). Twist off screw and mat from the hanging ring (P8) and across the middle hole of canopy (P5) and use screw and mat lock in again.
7. Black wire from ceiling (junction box) attaches to "L" wire from the fixture
8. White wire from ceiling (junction box) attaches to "N" wire from the fixture
9. "E" wire from the ceiling attaches to "E" wire from the fixture.
10. Screw (P2) through to canopy hole (P5) and then put rubber ring (P6) and twist screw cap (P7) to fix mounting bracket (P3).

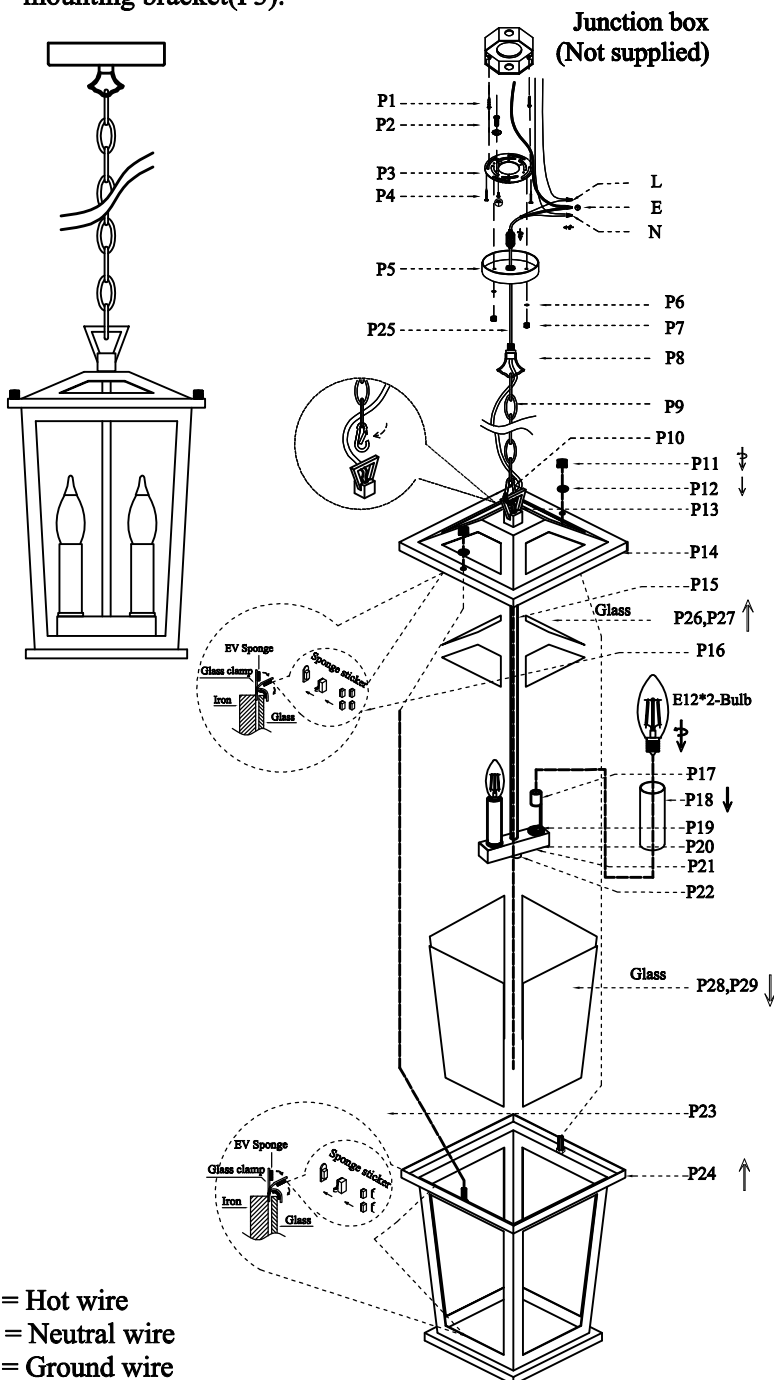

"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire

Part Number	Part	Picture	Description	Qty
CP12H01BK	P1		Explosion screw	2
	P2		Screws M4	2
	P3		Mounting bracket $\varnothing 3.94$	1
	P4		Screws M4	2
	P5		Canopy ($\varnothing 4.7'' * 0.78''$)	1
	P6		Rubber ring	2
	P7		Screw cap	2
Chain04PBK	P8		Hanging rings L1.57''*W0.59''*H1.57''	1
	P9		Chain (L39'')	1
	P10		Hook (L1.57''*W0.78''*H0.15'')	1
P-0D333H15BK-1	P11		Screw cap	2
	P12		Rubber ring	2
	P13		50*50*20MM Ring	1
	P14		220*150*40MM Cover	1
	P15		Ø9.3*260MM Tube	1
	P16		EV Sponge Sponge sticker	12
	P17		E12 Lamp Holder	2
	P18		Ø22*H80MM Tube	2
	P19		Ø23*5MM Cover	2
	P20		107*28*23MM Box	1
	P21		105*26MM Plate	1
	P22		Ø15*8MM Column parts	1
	P23		EV Sponge Sponge sticker	12
	P24		215*145*289MM Body	1
Cord-59-18#-BK	P25		UL18#, L59" Black	1
GP12L16	P26		110*73MM Glass	2
	P27		171*43MM Glass	2
	P28		108*266MM Glass	2
	P29		178*266MM Glass	2