



Drop-In Cooktops

FFEC3225L W/B

32" Electric



Product Dimensions

Width	32-1/4"
Depth	20-1/4"
Height	3-3/4"

More Easy-To-Use Features

Removable Control Knobs

A.D.A. Compliant¹

Available in:



White
(W)



Black
(B)

Elements	Size	Watts
Right Front	9"	2,500
Right Rear	6"	1,250
Left Front	6"	1,250
Left Rear	9"	2,500

¹When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

Signature Features

Ready-Select™ Controls

Select options or control cooking temperature with our easy-to-use controls.

Ceramic Glass Cooktop

For a more beautiful cooktop that's easy to clean.

Color-Coordinated Control Knobs

White and Black cooktops come with matching knobs.


Hot Surface Indicator

Alerts you when your cooktop may be too warm to touch.

Features	
Controls	Ready-Select™
Surface Type	Color-Coordinated Ceramic Glass
Right Front Element (Watts)	9" - 2,500
Right Rear Element (Watts)	6" - 1,250
Left Front Element (Watts)	6" - 1,250
Left Rear Element (Watts)	9" - 2,500
Hot Surface Indicator	Yes
Control Location	Front Left
Knob Color	Color-Coordinated
Knob Type	Plastic
Certifications	
A.D.A. Compliant ¹	Yes
Specifications	
Power Supply Connection Location	Left Side
Voltage Rating	240V/208V/60Hz
Connected Load (kW Rating) @ 240/208 Volts ²	6.5/4.9
Amps @ 240/208 Volts	21.7/18.8
Minimum Circuit Required (Amps)	30
Approved for Electric Single Wall Oven Combination Installation	
Shipping Weight (Approx.)	45 Lbs.

¹When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

²Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.

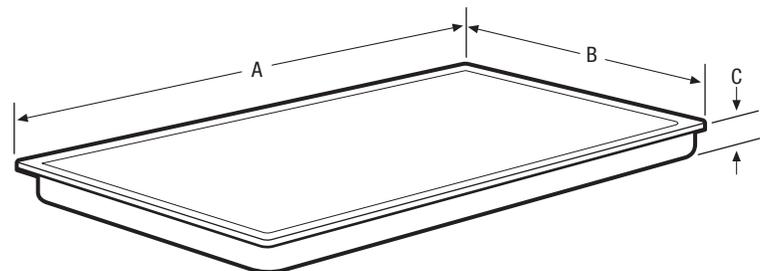

NOTE: Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions	
A - Width	32-1/4"
B - Depth	20-1/4"
C - Height	3-3/4"

Cutout Dimensions	
Width (Min.)	31"
Width (Max.)	31-1/4"
Depth (Min.)	19"
Depth (Max.)	19-1/4"
Height	5-3/4"

Granite Countertop Installation Kit available.

Accessories information available on the web at frigidaire.com