

# Mitte Island

6641504 | 1.0

## GENERATION LIGHTING PENDANT

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**Use minimum 90°C supply conductors.**

**SAVE THESE INSTRUCTIONS!**

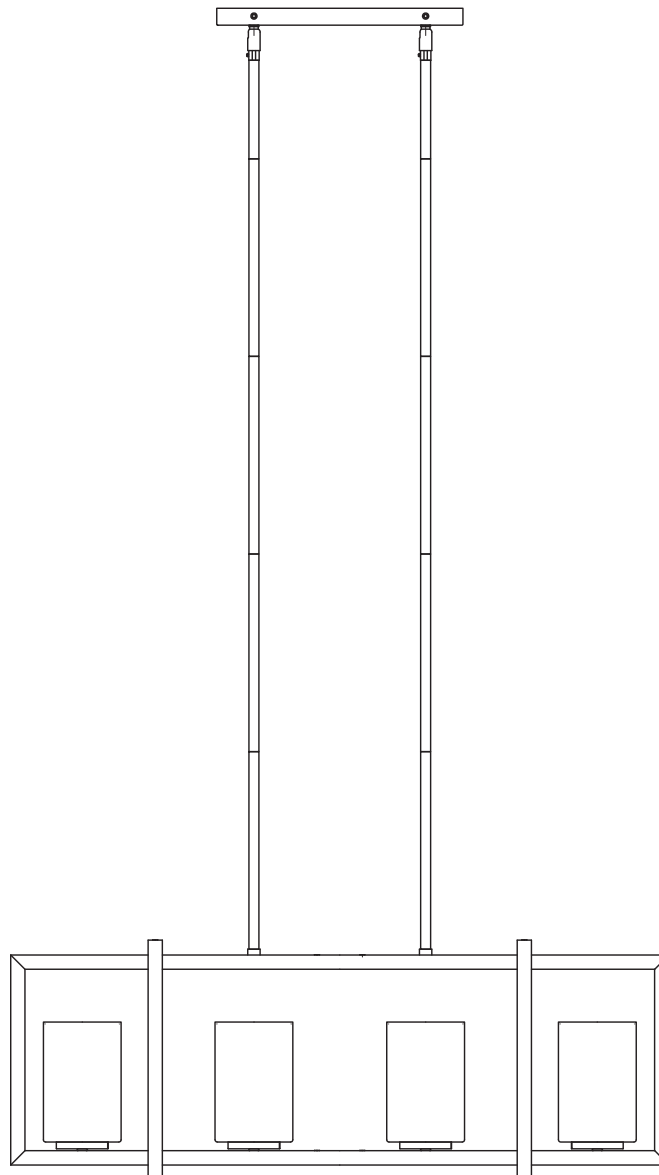

GENERATION LIGHTING  
7400 Linder Ave., Skokie, IL 60077  
T 847.410.4400 | F 847.410.4500  
www.generationlighting.com

# Install the Fixture

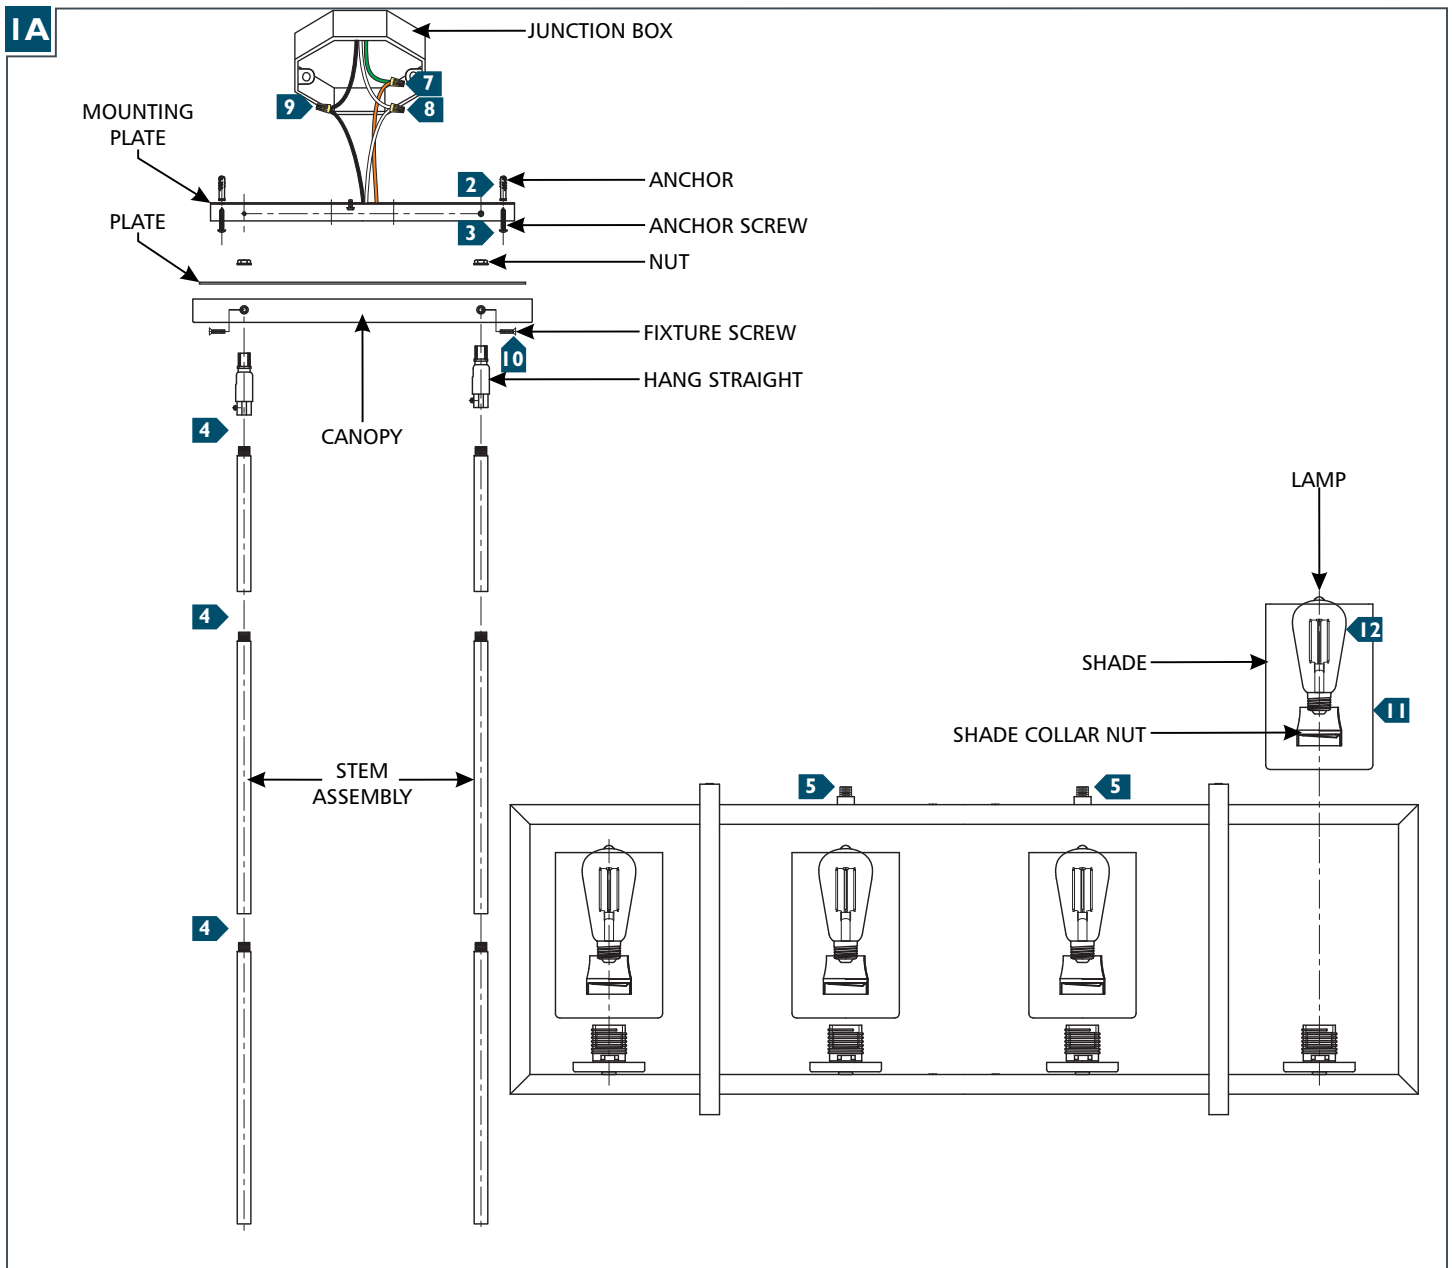

- 1** Temporarily install the mounting plate to the junction box and mark the anchor locations through the holes on the mounting plate. Remove the mounting plate.
- 2** Drill appropriate sized holes at the marked locations and install the anchors.
- 3** Secure the mounting plate to the junction box and screw the anchor screws into the anchors.
- 4** Determine the wanted height or look of the fixture with the provided hang straight and stems and assemble them by screwing them together. All the parts may be used alone or used in combination.
- 5** Feed the fixture wires through the stem assembly and screw the assemblies onto the top of the fixture.
- 6** Feed the fixture wires through the canopy, plate, and nuts, then place the canopy onto the hang straights followed by the plate and secure together using the nuts.
- 7** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 8** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 9** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 10** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place using the fixture screws.
- 11** Place the shade over the socket and secure it in place by screwing the shade collar nut onto the socket. Repeat for remaining shades.
- 12** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.