

MILES MINI & ONE-LIGHT PENDANTS

GLP1031; GLP1041

General Product Information



Intertek

SAVE THESE INSTRUCTIONS!



STANDARD INSTALLATION



INDOOR



NEC COMPLIANT JUNCTION BOX



DAMP LOCATION SAFE



BULB(S) (NOT INCLUDED)



CONVERTS TO LED




ADAPTABLE TO SLOPED CEILINGS



PLEASE SEE visualcomfort.com FOR PRODUCT SPECS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



Product Warranty



FCC Statement


Suggested/Required Tools




ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



WIRE CUTTER




PENCIL/MARKER

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

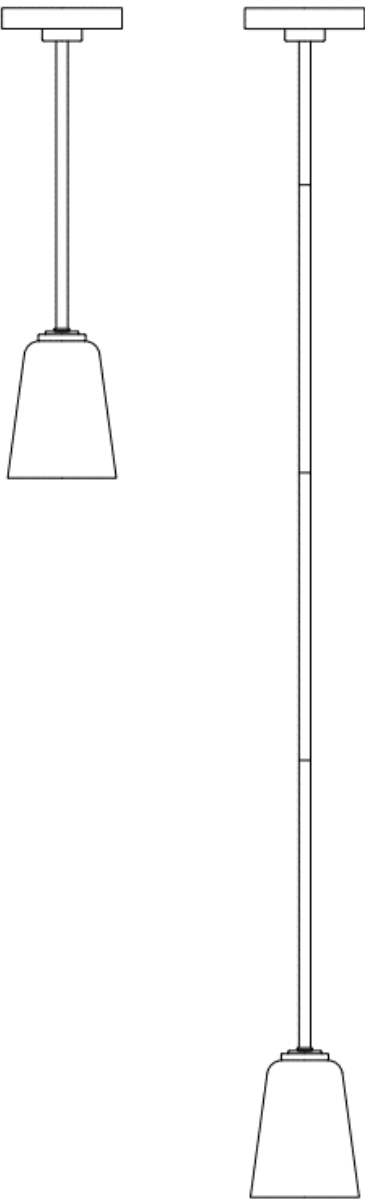

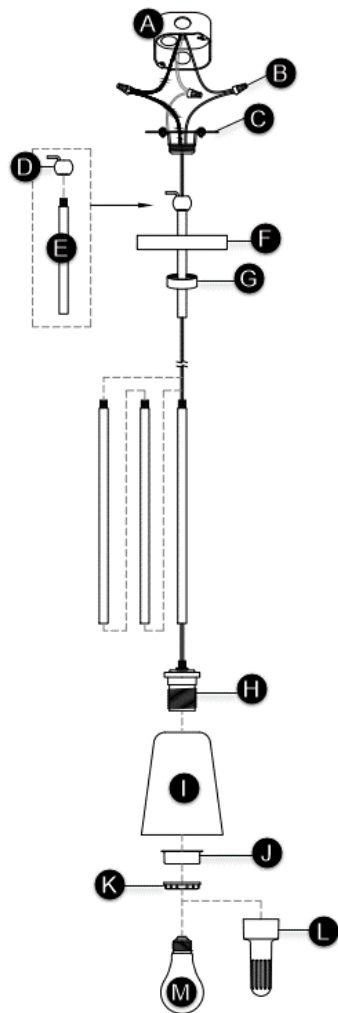

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate with Screw Collar & Mounting Screws (Not Illustrated)
- D. Half Ball
- E. Stem Assembly
- F. Canopy
- G. Collar Nut
- H. Fixture with Socket Assembly
- I. Glass Shade
- J. Spacer (GLP1031 Only)
- K. Counter Ring
- L. Counter Ring Tool (GLP1031 Only)
- M. Bulb (Not Included)

INSTRUCTIONS

I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the fixture.
2. Separate the mounting plate from the canopy and install it over the junction box using the mounting screws.
3. Determine the desired height of the fixture and complete the stem assembly by screwing the stems together.
4. Feed the fixture wires through the stem assembly, collar nut, canopy, and half ball.
5. Screw the stem assembly on top of the fixture. Then screw the half ball onto the stem assembly.
6. Slide the half ball of the assembled fixture into the bracket of the mounting plate.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black/smooth) and hot power line wire from the junction box
 - b) Neutral fixture wire (white/textured or ribbed) and neutral power line wire from the junction box
4. Carefully tuck all the wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Mount the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto it.
2. **For GLP1031 only:** Place the shade and the spacer onto the socket and secure it in place by screwing the counter ring onto the socket with the counter ring tool. **For GLP1041 only:** Place the shade onto the socket and secure it in place by screwing the counter ring onto the socket.
3. Screw the bulb into the socket. Refer to the socket label for max wattage information.