


GROHTHERM SMARTCONTROL Triple Function Thermostatic Trim with Control Module

MODEL # 29142000

Pure Freude
an Wasser

GROHE

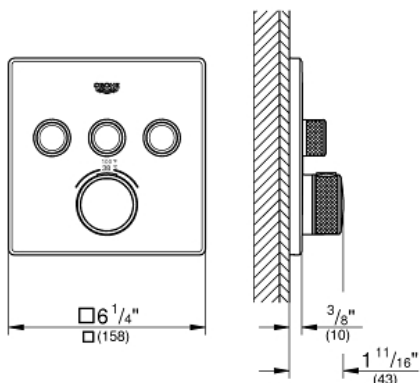

Product Description:
GROHTHERM SMARTCONTROL
Triple Function Thermostatic Trim with Control Module

Standard Specification:

- Final installation set for:
- Required rough-in-set sold separately (GROHE Rapido SmartBox 35 601 000)
- Metal wall escutcheon with **GROHE QuickFix** (covered escutcheon and shaft sealing, covered fixing), 6° angle adjustable
- 3/8" (10 mm) thin profile escutcheon
- **GROHE StarLight** chrome finish
- SmartControl push for ON-OFF, turn for volume adjustment from EcoJoy to Full Flow
- Includes various icons to customize push buttons
- **GROHE TurboStat** Compact cartridge with wax thermoelement
- **GROHE SafeStop** safety button at 100°F/38°C
- Built-in check valve with dirt strainer
- Multiple outlets can be run simultaneously
- Maximum flow performance combined: 9.5gpm (36L/min) @ 43.5 psi (3 bar)
- Optional flow reducer for CALGreen compliance included

Applicable Codes & Standards:

- ASME A112.18.1/CSA B125.1


Color:

- 29142000 StarLight Chrome

RAPIDO SMARTBOX
Universal Rough-In Box
MODEL # 35601000

Pure Freude
an Wasser

GROHE

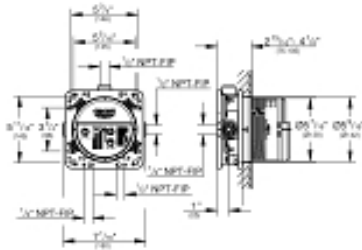

Product Description:
RAPIDO SMARTBOX
Universal Rough-In Box

Standard Specification:

- 3 outlets 1/2" Female NPT
- 2 inlets 1/2" Female NPT
- Installation depth 3"-4" (75-105 mm)
- Pre-mounted flushing plug
- Stable built-in box and plaster guard
- Mounting options for solid walls and dry walls
- Trim not included

Applicable Codes & Standards:

- ASME A112.18.1/CSA B125.1

Color:


- 35601000 StarLight Chrome

EUPHORIA CUBE+ STICK Shower Set

MODEL # 27891000

Pure Freude
an Wasser

GROHE

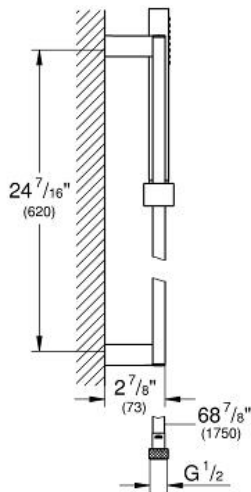

Product Description:
**EUPHORIA CUBE+ STICK
Shower Set**

Standard Specification:

- Consisting of:
- Euphoria Cube Hand Shower (27 888 000), 2.5 gpm
- 24" Shower rail (27 892 000)
- 69" metal shower hose (28 025)
- 2.5 gpm (9.5 l/min) flow limiter
- **GROHE DreamSpray** perfect spray pattern
- **GROHE StarLight** chrome finish
- **SpeedClean** anti-lime system
- Inner WaterGuide for a longer life
- Twistfree to prevent hose from twisting
- Suitable for instantaneous heater
- Max Flow Rate 2.5 gpm at 80 psi (9.5 L/min)
- Min. recommended pressure: 15 psi

Applicable Codes & Standards:

- Energy Policy Act of 1992
- ASME A112.18.1/CSA B125.1

Color:


- 27891000 StarLight Chrome

ALLURE BRILLIANT
Shower outlet elbow

MODEL # 27708000

Pure Freude
an Wasser

GROHE

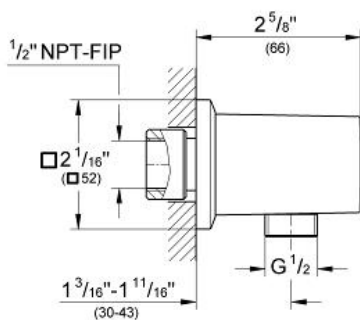

Product Description:
ALLURE BRILLIANT
Shower outlet elbow

Standard Specification:

- 1/2" NPT Male Threads
- Protected against backflow
- GROHE StarLight chrome finish

Applicable Codes & Standards:


- Energy Policy Act of 1992
- ASME A112.18.1/CSA B125.1

Color:

- 27708000 StarLight Chrome

RAINSHOWER 310
SMARTACTIVE CUBE
Shower Head Set 2 Sprays
MODEL # 26504000

Pure Freude
an Wasser

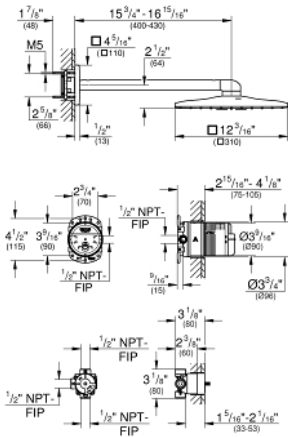

Product Description:
RAINSHOWER 310 SMARTACTIVE CUBE
Shower Head Set 2 Sprays

Standard Specification:

- Consisting of:
- Rainshower 310 SmartActive Cube shower head
- 2 Spray patterns:
- GROHE PureRain, ActiveRain
- Includes 16" shower arm
- 1.75 gpm
- **GROHE DreamSpray** perfect spray pattern
- **GROHE StarLight** chrome finish
- **SpeedClean** anti-lime system
- Inner WaterGuide for a longer life
- Rough-in set for shower head
- 2-Way diverter rough-in set 29 900 000 (Trim set to be ordered separately)

Applicable Codes & Standards:

- Energy Policy Act of 1992
- ASME A112.18.1/CSA B125.1
- US Federal and State material regulations

Color:

- 26504000 StarLight Chrome