

Grass Full Extension



- > Weight capacity: 34 kg (75 lbs.)
- > Maximum drawer thickness: 16 mm (5/8")
- > Face frame or frameless application
- > Integrated liquid damper
- > Exceeds ANSI/BHMA Grade 1 testing
- > Multiple cleats for optimal security of front locking clip
- > Oblong mounting hole option provides 4 mm (3/16") depth adjustment
- > Material: Steel; Finish: zinc-plated

Note

Front locking device is required, see page 8.73.

→ Elite Plus 16




Drawer length	Internal cabinet depth minimum*	Internal cabinet depth maximum	Item No.	Bulk Item No.
240 (9 7/16")	259 (10 3/16")	296 (11 5/8")	433.25.110	-
305 (12")	329 (12 15/16")	363 (14 5/16")	433.25.111	-
381 (15")	407 (16")	440 (17 5/16")	433.25.112	433.25.122
457 (18")	479 (18 7/8")	516 (20 5/16")	433.25.113	433.25.123
533 (21")	562 (22 1/8")	596 (23 7/16")	433.25.114	433.25.124

Bulk Supplied With 200 pcs.

Note

Front locking device required, see page 8.73

*For frameless applications, deduct 1.5 mm (1/16") for minimum internal cabinet depth.

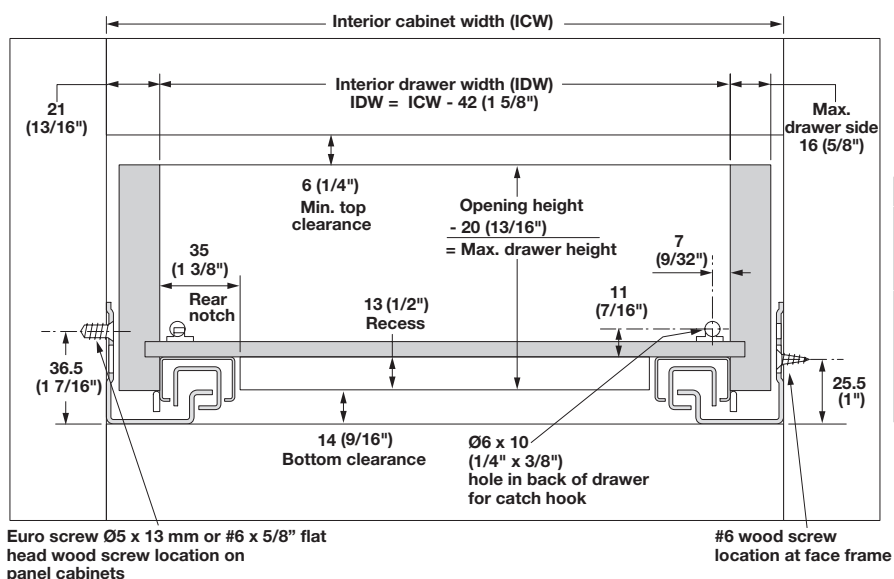

Calculations outside drawer width					
Drawer side thickness	16 (5/8")	15 (19/32")	14 (9/16")	13 (1/2")	12 (15/32")
Deduct from interior cabinet width	10 (3/8")	12 (15/32")	14 (9/16")	16 (5/8")	18 (23/32")

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.