



Projecta™ 6036 Rectangle Skirted Soaker And Whirlpool Bathtubs

Letter	Description	Soaker Models	Whirlpool Models
		R1S6036B	R1S6036W
-	Drain/Motor Location	LH / RH Drain	LH / RH Drain & Right or Left Side Motor
-	Cutout	N/A	
-	Total Weight	829 lbs (376 kg)	843 lbs (382 kg)
-	Floor Loading	55 lb/ft² (270 kg/m²)	56 lb/ft² (274 kg/m²)
-	Operating Gallons (Max)	62 gallons (235 liters)	62 gallons (235 liters)
-	Product Weight	61 lbs (28 kg)	75 lbs (34 kg)
-	Soaking Depth	14" (356 mm)	
L	Outer Length	60" (1524 mm)	
W	Outer Width	36" (914 mm)	
H	Overall Height	20" (508 mm)	
A	Overflow Height	15.25" (387 mm)	
B	Long Edge to Drain Center	8.25" (210 mm)	
C	Short Edge to Drain Center	18" (457 mm)	
D	Drain Shoe Length	6.25" (159 mm)	
E	Deck/Flange Height	1" (25 mm)	
F	Deck Width	3.88" (99 mm)	
G	Service Access Dimensions	N/A	Removable Skirt Access
I	Floor Cutout for Drain	12" x 4" (305 mm x 102 mm)	
J	Interior Dimensions Bottom of Bath J(L) x J(W)	43" x 23" (1092 mm x 584 mm)	




WHIRLPOOL MODELS

Each component requires a separate, dedicated GFCI protected circuit

Model with components	GFCI Outlet (60Hz)
Motor/Pump	120V 15A
Heater (if available)	120V 15A

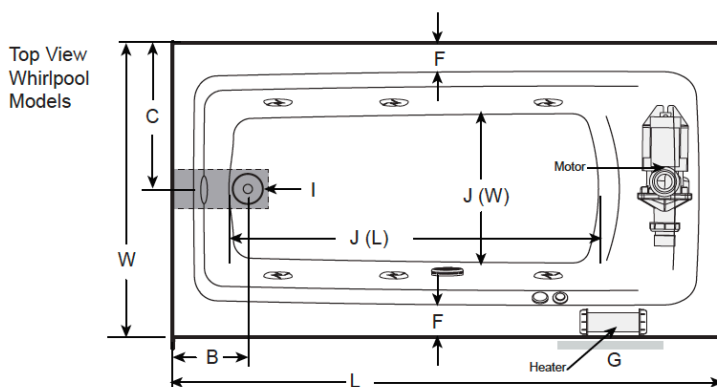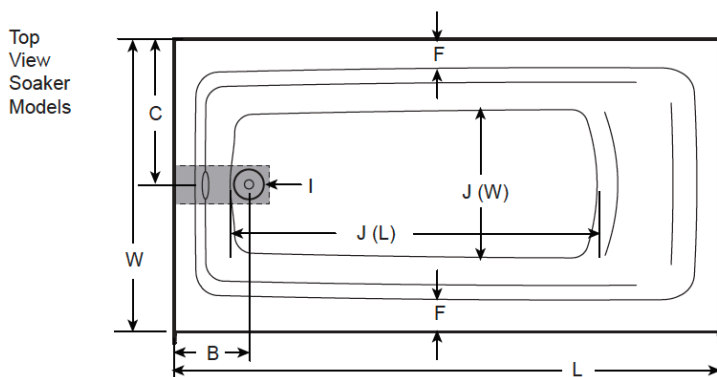KEY DIMENSIONS* [NOTE: The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).]


NOTE: Drawings not to scale.



©2019 Jacuzzi Luxury Bath • For additional information, call Customer Service 800-288-4002 • www.jacuzzi.com/baths
Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE