








Projecta™ 6060 Corner Drop-In Soaker And Whirlpool Bathtubs

Letter	Description	Soaker Models	Whirlpool Models
		R5D6060B	R5D6060W
-	Drain/Motor Location	Center Drain	Center Drain & LH / RH Motor
-	Cutout	See Below	
-	Total Weight	1042 lbs (473 kg)	1057 lbs (479 kg)
-	Floor Loading	41.7 lb/ft ² (204 kg/m ²)	42.3 lb/ft ² (206 kg/m ²)
-	Operating Gallons (Max)	86 U.S. gallons (326 liters)	
-	Product Weight	76 lbs (34 kg)	91 lbs (41 kg)
-	Soaking Depth	15" (381 mm)	15" (381 mm)
L	Outer Length	60" (1524 mm)	
W	Outer Width	60" (1524 mm)	
H	Overall Height	22" (558 mm)	
A	Overflow Height	17.38" (378 mm)	
B	Long Edge to Drain Center	12.50" (318 mm)	
C	Deck Edge to Drain Center	33.25" (845 mm)	
D	Drain Shoe Length	6" (152 mm)	
E	Deck Height	2" (51 mm)	
F	Deck Width	3" (76 mm)	
G	Service Access Dimensions	12" x 18" (305 mm x 457 mm)	
I	Floor Cutout for Drain	9" x 4" (229 mm x 102 mm)	
J	Interior Dimensions Bottom of Bath J(L) x J(W)	48" x 39" (1219 mm x 990 mm)	

WHIRLPOOL MODELS	
Each component requires a separate, dedicated GFCI protected circuit	
Model with components	GFCI Outlet (60Hz)
Motor/Pump	120V 15A
Heater (if available)	120V 15A

KEY DIMENSIONS* [NOTE: The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).]

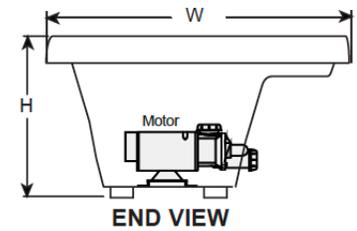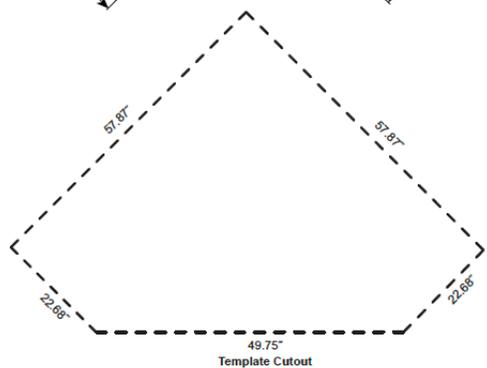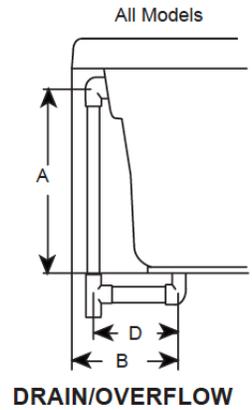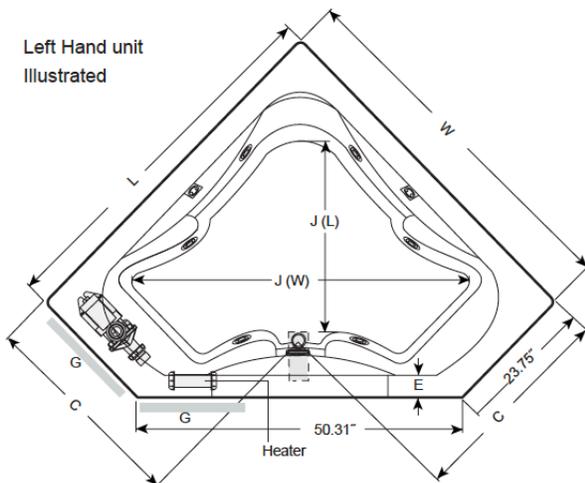

NOTE: Drawings not to scale.

©2019 Jacuzzi Luxury Bath • For additional information, call Customer Service 800-288-4002 • www.jacuzzi.com/baths
 Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE