

Mio 6636 Salon Spa Combination



Product Codes beginning with: MIO6636CCR

Also applies to products sold under part numbers: HR20, HY55, HY60, HY65, HY70, HY75, HY80, HY85

TECHNICAL SPECIFICATIONS


| | English | Metric |
|---|--|--------------------------------------|
| Outer Dimensions | 66" L x 36" W x 25" H | 1676 mm L x 914 mm W x 635 mm H |
| Interior Dimensions (bottom of bath) L x W (Mid) x W (End) | 41" L x 21 1/4" W x 21 1/4" W | 1041 mm L x 540 mm W x 540 mm W |
| Drain/Equipment Configuration | Center drain/Right end pump & blower | Center drain/Right end pump & blower |
| Bath Weight (empty) | 148 lbs | 67 kg |
| Total Weight/Floor Loading | 981 lbs 59.5 lbs/ft ² | 446 kg 290 kg/m ² |
| Operating Gallonage (min-max) | 48 (min) 70 (max) U.S. Gals | 181.7 (min) 265 (max) L |
| Electrical Specifications | Each component requires a separate, dedicated GCFI protected circuit(s) | |
| Motor/Pump & Heater | 240V 20A 120HZ | |
| Blower | 120V 15A 60HZ | |

FEATURES, UPGRADES & ACCESSORIES

Material Type: High-Gloss Acrylic
Install Type: Drop-in or Undermount
Available Colors: White (W), Almond (A), Oyster (Y), Black (B)
Cut-out Template: HQ96000
Standard (Included) Features:
 8 jets, In-line Heater, Chromatherapy lighting,
 900w blower, bottom air channels
Available Control Systems:
 J4 Luxury Control Panel (standard)
 J5 Luxury LCD Control Panel


Available Upgrades:
 Whisper Quiet Technology,
 Illumatherapy Lighting
Available Accessories:
 DA34 Rotary Drain Kit PVC (specify metal finish)
 GU44 TheraPro Jet Trim Kit (specify metal finish)
 GU45 AccuPro Jet Trim Kit (specify metal finish)
 827: Chrome, 826: Brushed Nickel, 845: Oil Rubbed Bronze
 *Note: GU44 (Chrome) is standard on Illumatherapy jets.
 C263 Curved Pillow (specify color) 959: White, 958: Almond, 969: Oyster
 GQ88 Light Chromatherapy Add-on Kit

KEY DIMENSIONS

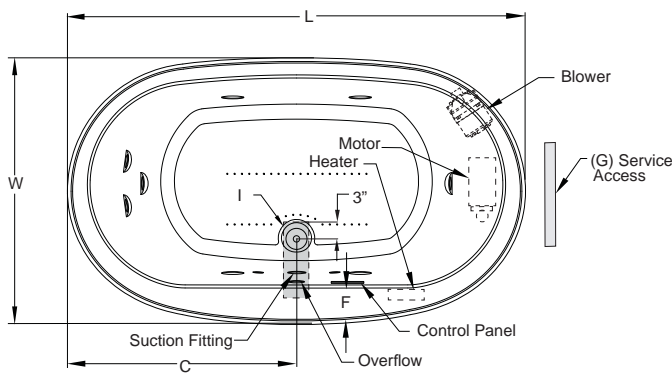


*Deck width reflects only area indicated on detail.

| Letter | Description | English | Metric |
|--------|----------------------------|---------------|-----------------|
| L | Outer Length | 66" | 1676 mm |
| W | Outer Width | 36" | 915 mm |
| H | Overall Height | 25" | 635 mm |
| A | Overflow Height | 17 7/8" | 454 mm |
| B | Long Edge to Drain Center | 13 7/16" | 295 mm |
| C | Short Edge to Drain Center | 33" | 838 mm |
| D | Drain Shoe Length | 6 7/8" | 173 mm |
| E | Deck Height | 2" | 51 mm |
| F | Deck Width* | 6 5/8" | 168 mm |
| G | Service Access Dimensions | 12" H x 18" L | 305 mm x 457 mm |
| I | Floor Cut-out for Drain | 12" x 4" | 305 mm x 102 mm |

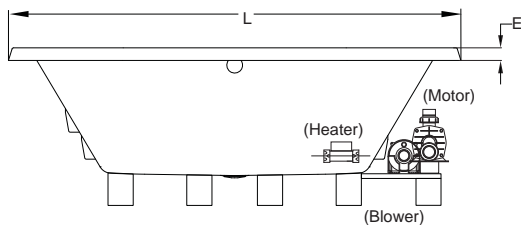


Side View



End View

Note: Drain installation is non-standard, vertical overflow connection requires offset.



Drain/Overflow

NOTE: Graphics May Not be to Scale