


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTIONS.

Hardware Package (included):

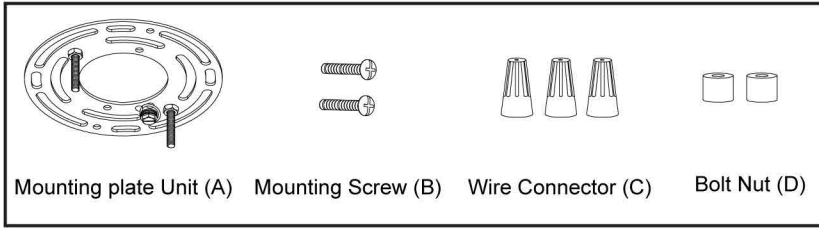


Installation Steps

Turn off the power at fuse or circuit box

1. Unscrew the bolt nuts (D), take out the mounting plate unit (A) and then attach to the outlet box by using two mounting screws (B).
2. Attach the tube and shade to the fixture.
3. Rod Connections:
 - a. Thread the fixture wire from the shade through the lower rod, then secure the lower rod onto shade using the threaded pipe.
 - b. Thread the fixture wire through the middle rod and then secure the middle rod onto the lower rod using the threaded pipe.
 - c. Thread the fixture wire through the upper rod, then secure the upper rod onto the middle rod using the threaded pipe.

Note: Length adjustable from 15-1/2" to 75-1/4". Use fewer rods if shorter length is desired.

4. Thread the fixture wire through the canopy kit, then secure the rod assembly to the set threaded pipe of the canopy kit.
5. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the hot wire (black insulation) from the power source to the black wire from the fixture.
 - Connect the neutral wire (white insulation) from the power source to the white wire from the fixture.
 - Attach the fixture ground wire (bare wire) to the mounting plate unit (A) with the green ground screw, or connect to the source ground wire if available.Carefully put the wires back into the outlet box.
6. Attach the fixture onto the mounting strap unit (A) and tighten it with two bolt nuts (D).


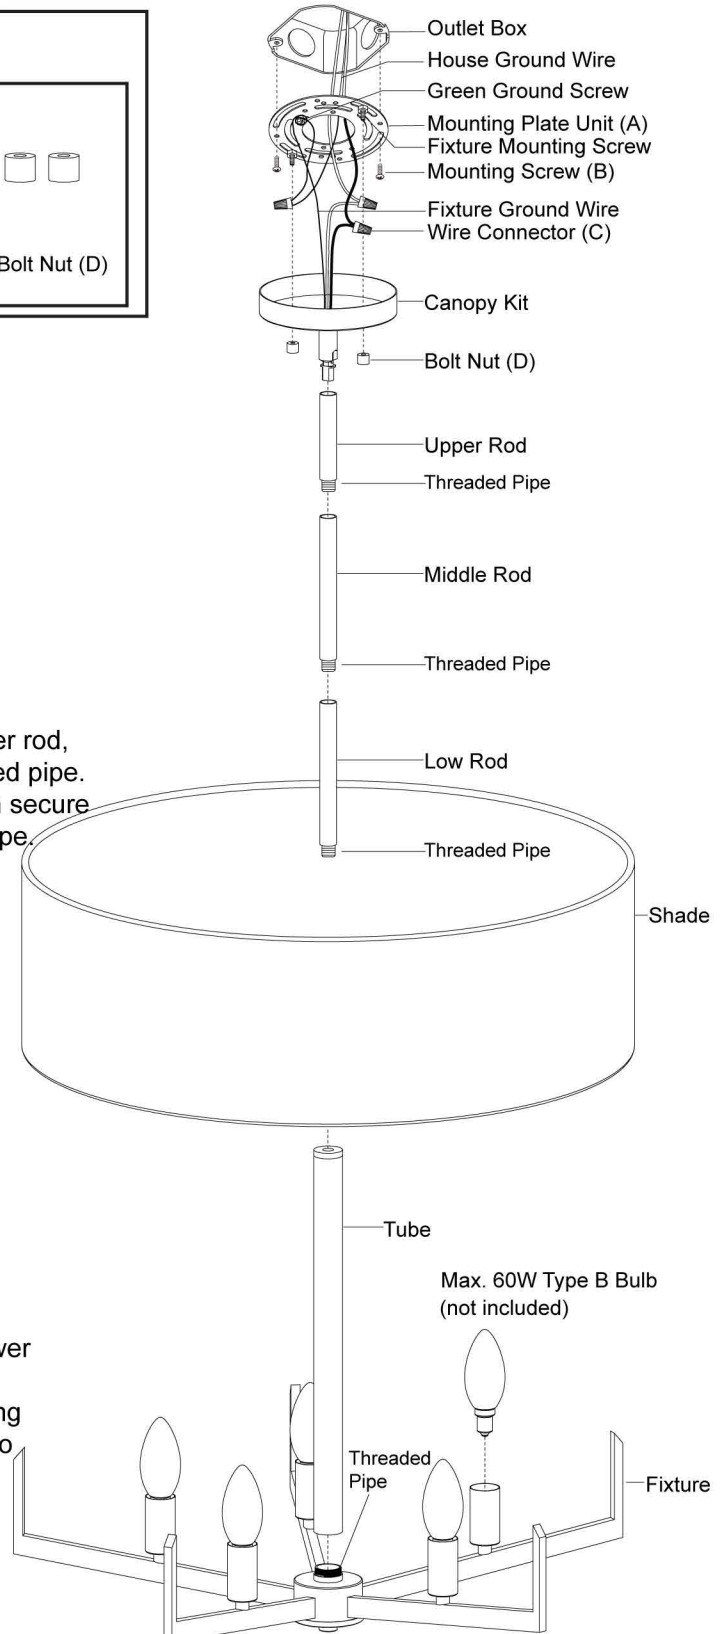


7. Install 5 x 60W Max. candelabra base bulbs (not included). See relamping label at socket area or packaging for maximum wattage allowed.

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

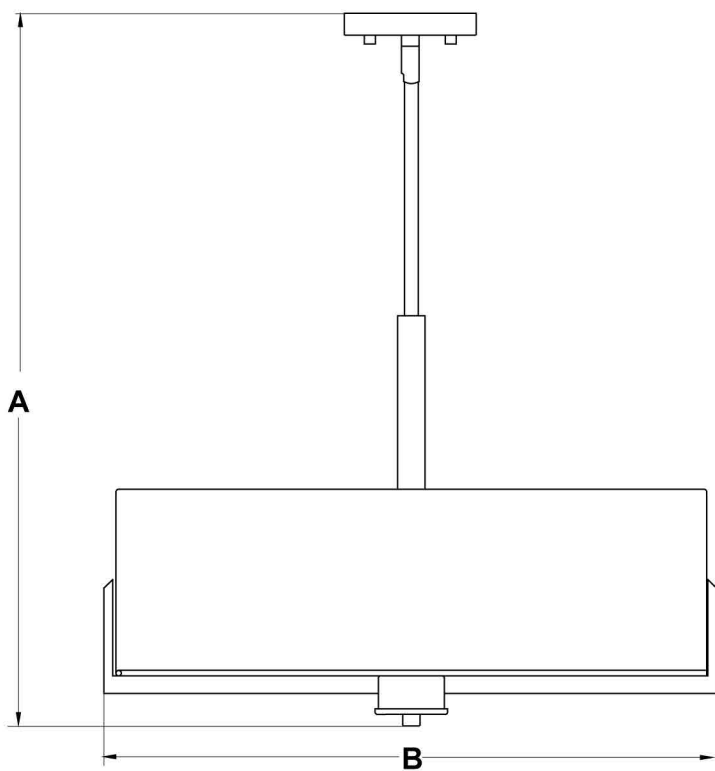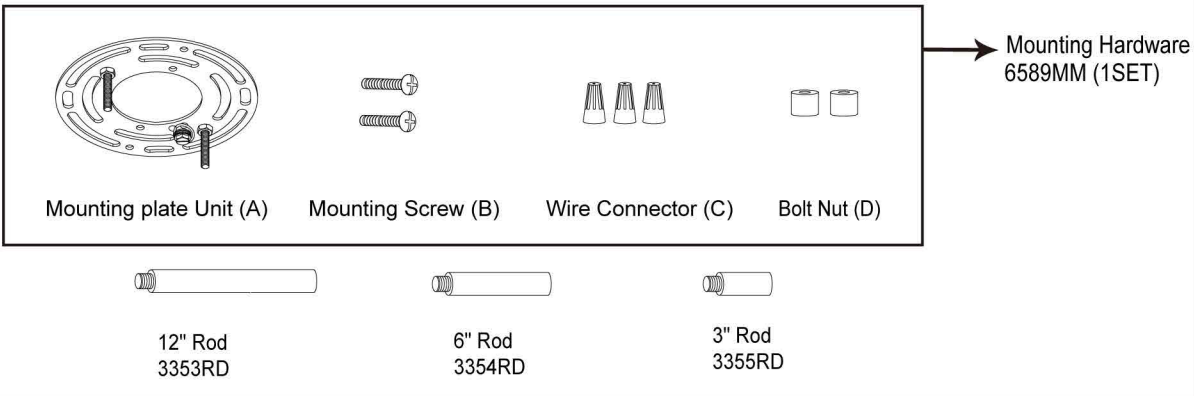

A: 15-1/2"~75-1/4"

B: 22"