




RS6000BICA

6" NEW CONSTRUCTION • IC AIRTIGHT
LINE VOLTAGE
RECESSED DOWNLIGHTS

Type	
Project	
Catalog No.	

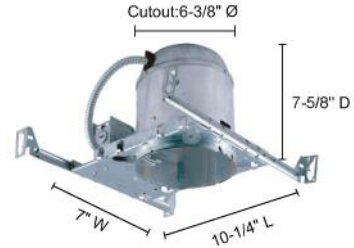

ORDERING INSTRUCTIONS

MODEL: RS6000BICA

DESCRIPTION

- 6" Line Voltage New Construction IC Airtight Housing
- Thermally protected, listed for damp locations.
- UL listed for feed-through branch circuit wiring.
- Dimmable with standard line-voltage incandescent dimmers.
- J-box accessible through ceiling cut-out.
- Adjustable socket plate assures proper placement of different lamps.
- Airtight models are Gasketed to prevent airflow through the housing from heating or cooling systems. Compliant with State of Washington restricted airflow requirements (WSEC Code).
- IC units may be covered with insulation to conserve energy.
- Dimensions: 7"W x 10-1/4"L x 7-5/8"D
- Hanger Bars: adjustable 14-1/2" to 24-1/2"
- Cut-Out: 6-3/8"Ø

LAMPS:

PAR16, PAR30, R30 120V 75W Max.
PAR38, R40 120V 100W Max.
A19 120V 40W Max.
Sold separately.

WIRING:

Housing is supplied with thermal protector.

OTHER OPTIONS



RS6000B

Non-IC Universa Housing for New Construction
PAR16/30/38,R30/40,A19 120V 150W
Dimensions: 7"W x 10-1/4"L x 7-5/8"D
Hanger Bars: adj. 14-1/2" ~ 24-1/2"
Cutout: 6-3/8"Ø



RS6000BA

Non-IC Airtight Universa Housing for New Construction
PAR16/30/38,R30/40,A19 120V 150W
Dimensions: 7"W x 10-1/4"L x 7-5/8"D
Hanger Bars: adj. 14-1/2" ~ 24-1/2"
Cutout: 6-3/8"Ø



RS6000BIC

IC Housing for New Construction
PAR30/R30 120V 75W
PAR38 120V 100W
A19 120V 40W
Dimensions: 7"W x 10-1/4"L x 7-5/8"D
Hanger Bars: adj. 14-1/2" ~ 24-1/2"
Cutout: 6-3/8"Ø



RS6000S

Non-IC Shallow Housing for New Construction
PAR30/R30 120V 75W
R40 120V 150W
PAR38 120V 100W
A19 120V 60W
Dimensions: 7"W x 10-1/4"L x 5-1/2"D
Hanger Bars: adj. 14-1/2" ~ 24-1/2"
Cutout: 6-3/8"Ø



RS6000BICA

6" NEW CONSTRUCTION • IC AIRTIGHT
LINE VOLTAGE
RECESSED DOWNLIGHTS

Type	
Project	
Catalog No.	

OTHER OPTIONS



RS6000R

Non-IC Housing for Remodel
PAR16/30/38,R30/40,A19 120V 150W
Dimensions: 6-7/8"W x 13-1/2"L x 7-3/4"H
Cutout: 6-1/2"Ø



RS6000RIC

IC Housing for Remodel
PAR30/R30 120V 75W
PAR38 120V 100W
A19 120V 40W
Dimensions: 6-7/8"W x 13-1/2"L x 7-3/4"H
Cutout: 6-1/2"Ø



RS6000SR

Non-IC Shallow Housing for Remodel
PAR30/R30 120V 75W
R40 120V 150W
PAR38 120V 100W
A19 120V 60W
Dimensions: 7"W x 12"L x 5-1/2"D
Cutout: 6-5/8"Ø

OTHER OPTIONS



RS6000RA

Non-IC Airtight Housing for Remodel
PAR16/30/38,R30/40,A19 120V 150W
Dimensions: 6-7/8"W x 13-1/2"L x 7-3/4"D
Cutout: 6-1/2"Ø



RS6000RICA

IC Airtight Housing for Remodel
PAR30/R30 120V 75W
PAR38 120V 100W
A19 120V 40W
Dimensions: 6-7/8"W x 13-1/2"L x 7-3/4"D
Cutout: 6-1/2"Ø