


## FEATURES

- *Sprayface resists hard water build-up and is easy to clean*
- *1.75 gal/min (6.6 l/min) flow rate*
- *Complements the Script collection*

## CODES/STANDARDS APPLICABLE

- Specified model meets or exceeds the following:
- ASME A112.18.1/CSA B125.1
  - EPA WaterSense®

P25040

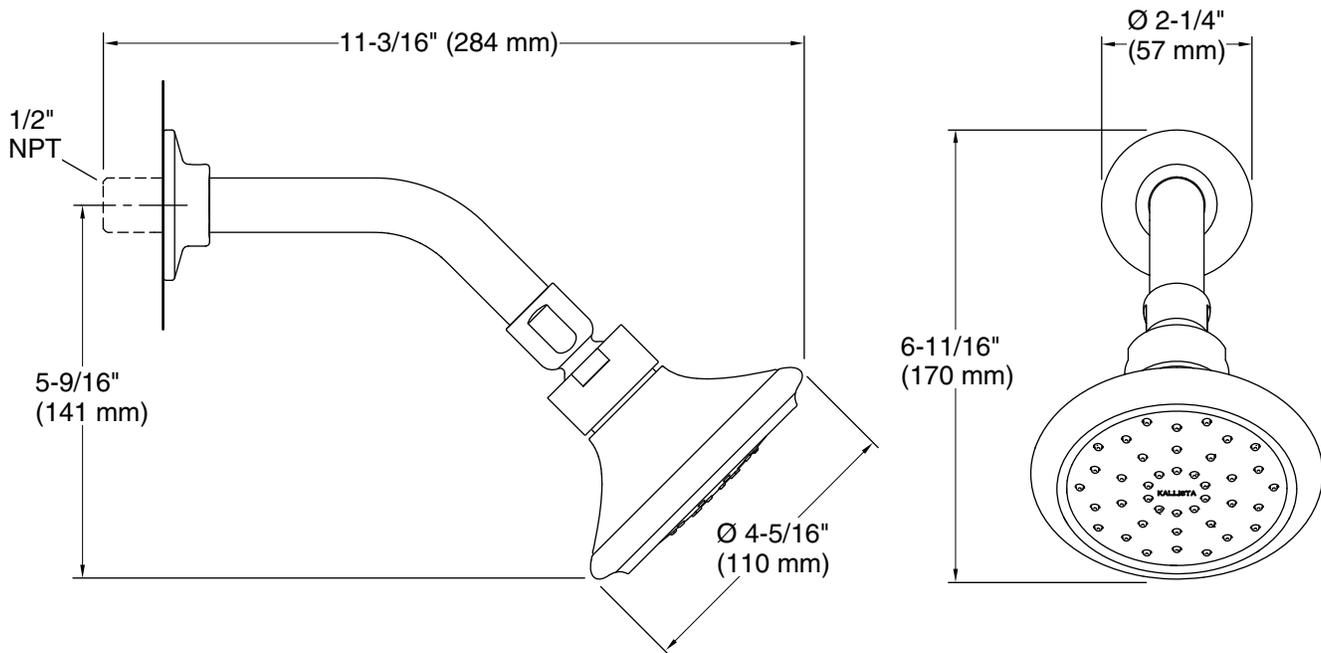

## SPECIFIED MODEL

Model	Description	Finishes		
P25040-00	Script Single-Function Showerhead with Arm	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> BCH Blush Bronze

*We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.*

## FEATURES


- 1.75 gal/min (6.6 l/min) flow rate
- Two spray options available (wide coverage spray, concentrated spray)
- Sprayface resists hard water build-up and is easy to clean
- 59" (1499 mm) hose included
- Complements Kallista faucets and fixtures

## CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- EPA WaterSense® (Pending)

## P24761

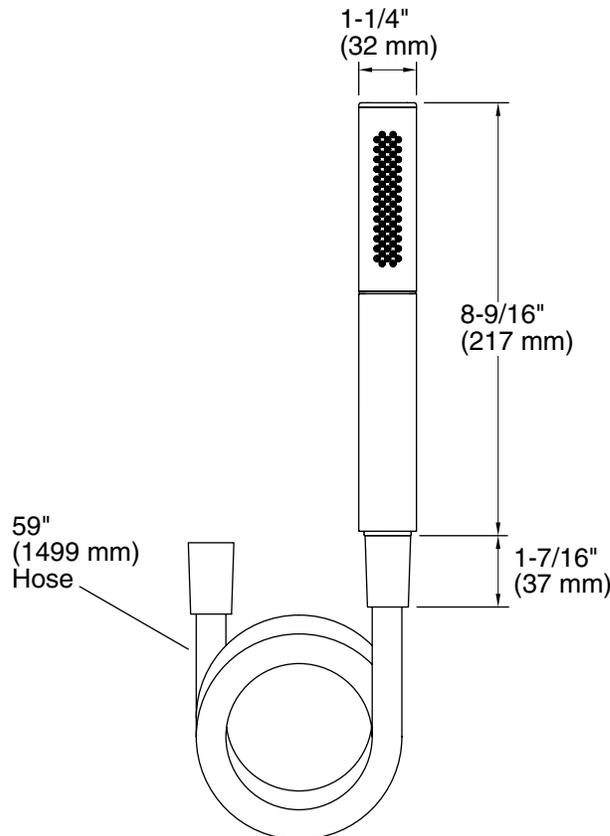


## SPECIFIED MODEL

Model	Description	Finishes			
P24761-00	Soft Modern Wand Dual-Function Handshower	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel	<input type="checkbox"/> LB Bronze
		<input type="checkbox"/> BL Matte Black	<input type="checkbox"/> W7 Black Nickel	<input type="checkbox"/> BV Brushed Bronze	<input type="checkbox"/> GN Gunmetal
Optional Accessories					
P21661-00	Contemporary Wall Supply Elbow	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel	<input type="checkbox"/> LB Bronze
		<input type="checkbox"/> GN Gunmetal	<input type="checkbox"/> W7 Black Nickel	<input type="checkbox"/> BL Matte Black	
P21663-00	Contemporary Deck-Mount Handshower Mounting Trim	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel	<input type="checkbox"/> LB Bronze
		<input type="checkbox"/> GN Gunmetal	<input type="checkbox"/> W7 Black Nickel	<input type="checkbox"/> BL Matte Black	
P24453-00	Contemporary Fixed Wall Bracket	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel	<input type="checkbox"/> LB Bronze
		<input type="checkbox"/> GN Gunmetal	<input type="checkbox"/> W7 Black Nickel	<input type="checkbox"/> BL Matte Black	
P24456-00	Contemporary Slidebar	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel	<input type="checkbox"/> LB Bronze
		<input type="checkbox"/> GN Gunmetal	<input type="checkbox"/> W7 Black Nickel	<input type="checkbox"/> BL Matte Black	
P21651-00	Traditional Wall Bracket with Integrated Supply Elbow	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel	
		<input type="checkbox"/> BL Matte Black	<input type="checkbox"/> W7 Black Nickel	<input type="checkbox"/> BV Brushed Bronze	
P21653-00	Traditional Deck-Mount Handshower Trim	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel	
		<input type="checkbox"/> BL Matte Black	<input type="checkbox"/> W7 Black Nickel	<input type="checkbox"/> BV Brushed Bronze	

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.

#### FEATURES

- Solid metal construction for durability and reliability
- Integrated supply and holder
- Clean look with reduced number of components needed in the shower space
- Complements Kallista faucets and fixtures

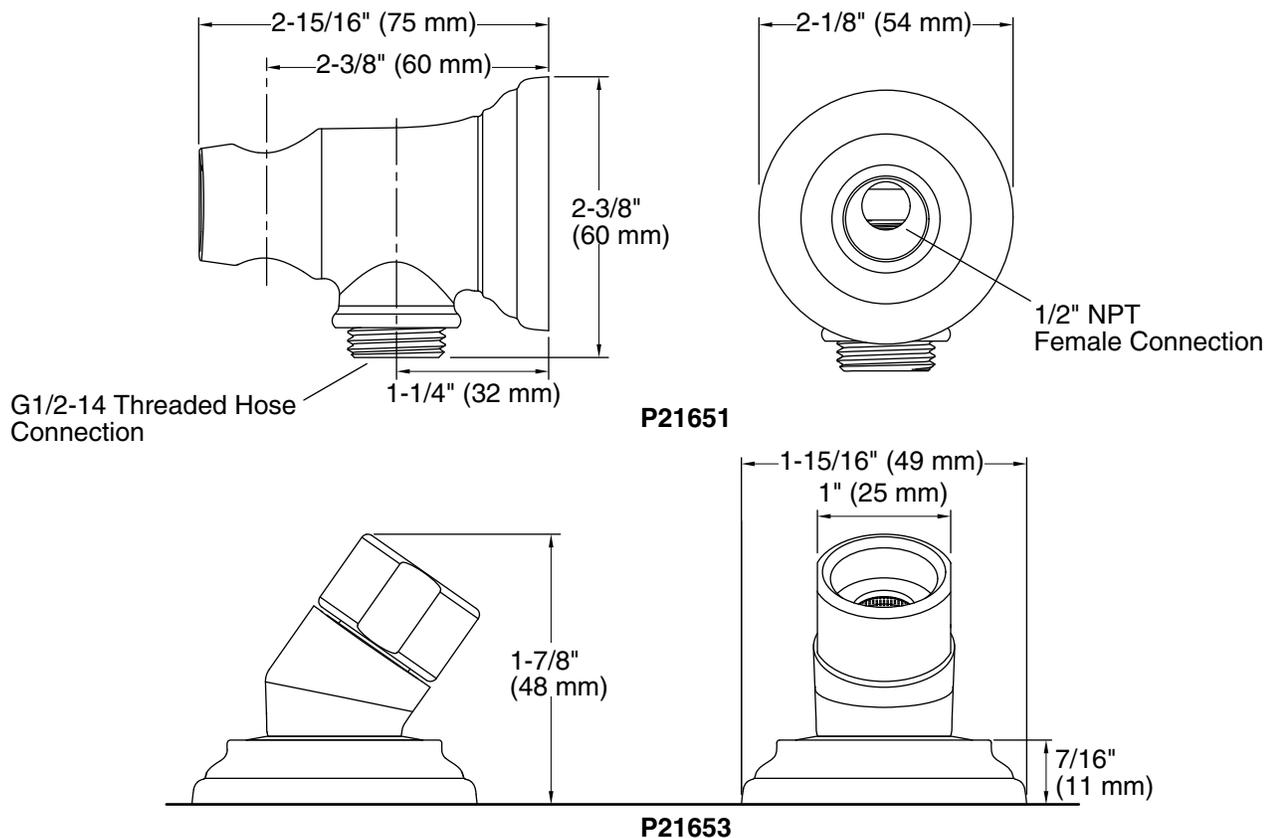

SPECIFIED MODEL						
Model	Description	Finishes				
P21651-00	Traditional Wall Bracket with Integrated Supply Elbow	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel	<input type="checkbox"/> BZ Antique Bronze	<input type="checkbox"/> W6 Weathered Bronze
P21653-00	Traditional Deck-Mounted Handshower Trim	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel	<input type="checkbox"/> BZ Antique Bronze	<input type="checkbox"/> W6 Weathered Bronze

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.

### FEATURES



- Solid metal construction for durability and reliability
- Allows bather to direct water flow
- Pairs with a 2- or 3-way transfer valve configuration
- Complements the Script collection

### CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- ADA\* (Lever only)
- OBC\* (Lever only)
- CSA B651\* (Lever only)

\* Compliant when installed to the specific requirement of this regulation

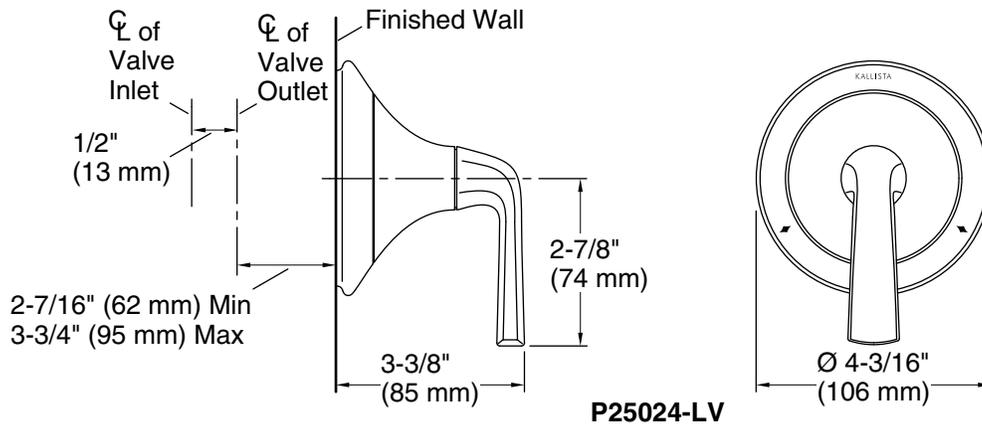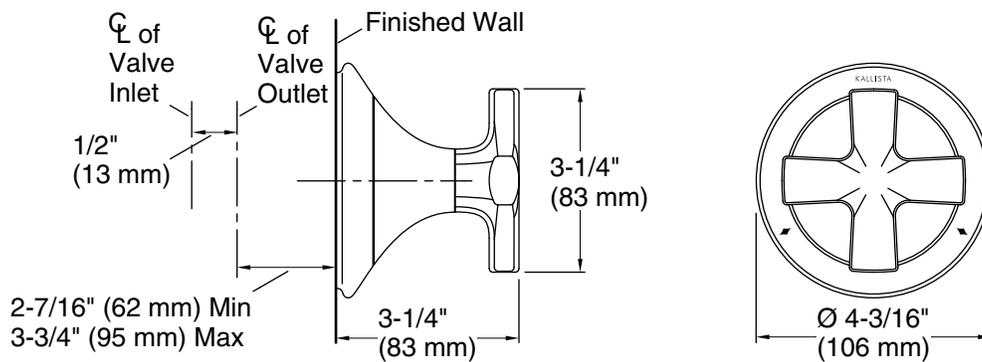

### SPECIFIED MODEL

Model	Description	Finishes		
P25024-CR	Script Transfer Trim, Cross Handle	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> BCH Blush Bronze
P25024-LV	Script Transfer Trim, Lever Handle	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> BCH Blush Bronze
Required Rough-in				
P29513-00	Transfer Valve	<input type="checkbox"/> N/A		
P29514-00	Transfer Valve, Eco	<input type="checkbox"/> N/A		

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.

### FEATURES


- Solid brass construction for durability and reliability
- Wall-mount installation
- Brass valve body
- Selection of one or combination of two outlets
- Single-handle control
- One 3/4" NPT inlet connection
- Three 1/2" NPT outlet connections
- Can be converted from 3 outlets (360° handle rotation) to 2 outlets (120° handle rotation)

### CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1

# P29513

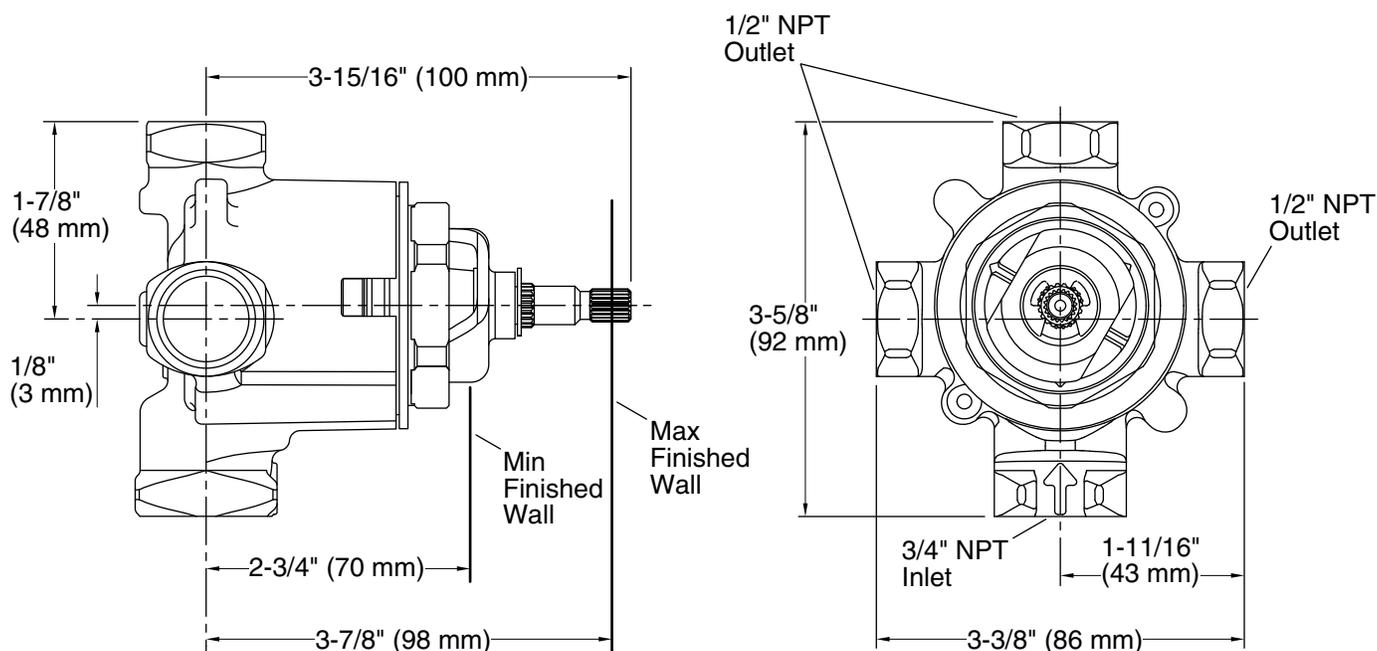

### SPECIFIED MODEL

Model	Description	Finishes
P29513-00	3-way/2-way Transfer Valve	<input type="checkbox"/> NA

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.

### FEATURES

- Solid metal construction for durability and reliability
- Pressure-balancing technology maintains water temperature within +/- 3 degrees Fahrenheit
- High-temperature limit stop allows you to preset a comfortable maximum temperature to eliminate scalding
- Complements the Script collection


### CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- ADA\*
- OBC\*
- CSA B651\*

\* Compliant when installed to the specific requirement of this regulation

# P25018

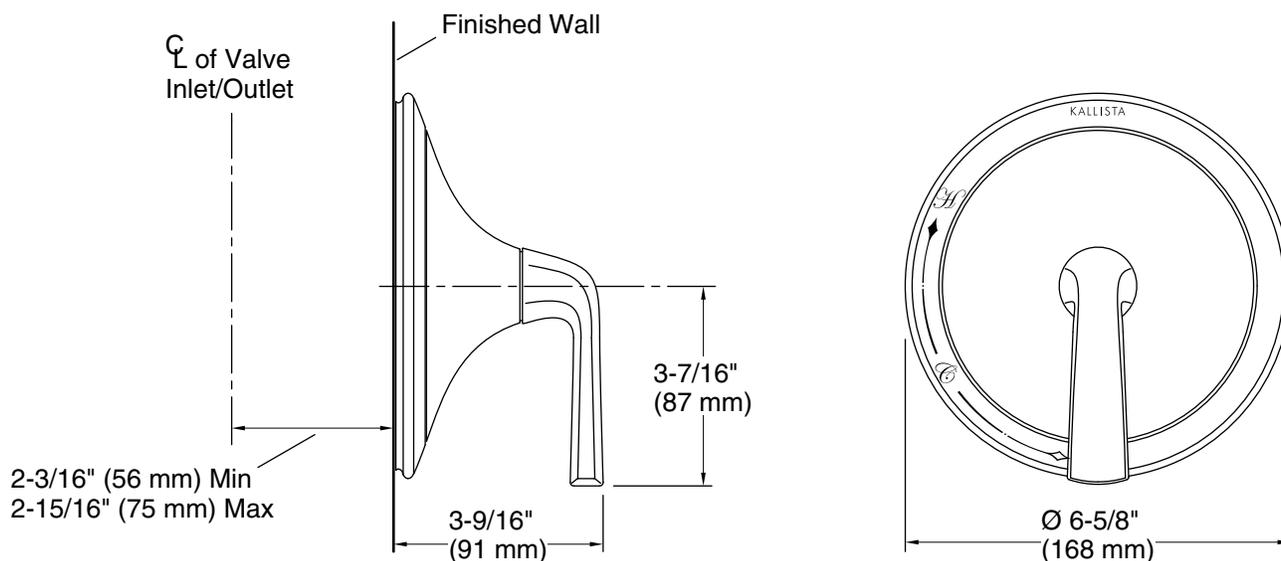

SPECIFIED MODEL				
Model	Description	Finishes		
P25018-LV	Script Pressure Balance Trim	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> BCH Blush Bronze
Required Rough-in				
P19310-00	Pressure Balance Valve	<input type="checkbox"/> N/A		
P19310-US	Pressure Balance Valve, with stops - PEX inlet	<input type="checkbox"/> N/A		
P19310-WS	Pressure Balance Valve, with stops	<input type="checkbox"/> N/A		

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.


#### FEATURES

- Brass valve body
- Pressure-balancing diaphragm design valve
- One-piece diaphragm cartridge design for ease of maintenance
- Mixing valve cycles from "cold" to "hot"
- High-temperature limit setting for added safety

#### CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ASSE 1016

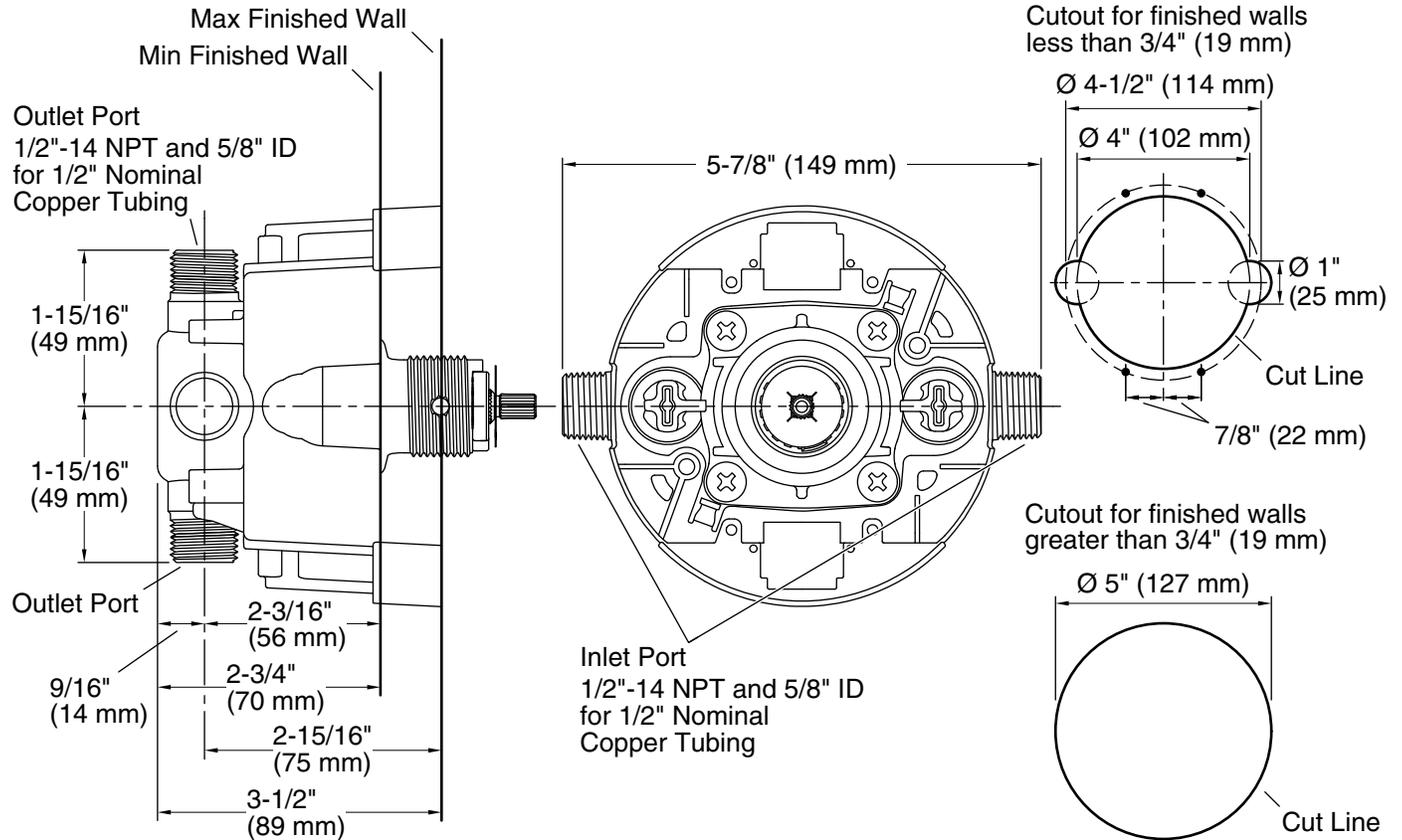

#### INSTALLATION NOTES

All dimensions are nominal.
Install this product according to the installation guide.
Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.
Cap the shower outlet if deck-mount spout, diverter, or handshower is connected to the spout outlet.
Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and wall-mount spout.
For finished walls greater than 3/4" (19 mm) and less than 1-1/2" (38 mm), install support(s) 2" (51 mm) from the stud face.
For finished walls greater than 1-1/2" (38 mm), install support(s) 3" (76 mm) from the face of the finished wall.

#### SPECIFIED MODEL

Model	Description	Finishes
P19310-WS	Pressure-Balancing Valve, with screwdriver stops	<input type="checkbox"/> NA
Optional Accessory		
10350-NA	Universal Rite-Temp® Valve Deep Rough-In	<input type="checkbox"/> NA

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.