

Heavy-Duty

150 lb. Load Class

1/2" Side Clearance

Max. Drawer Width: 36"



8600 Heavy-Duty Full Extension Drawer Slide

The 8600 Full Extension Drawer Slide is designed to accommodate wider and heavier drawers for today's challenging applications in the commercial, residential and education markets. This slide has a shorter profile vs. traditional lateral file slides and features a lever disconnect.

Applications

- Residential and Commercial Furniture
- Commercial Storage
- Retail Store Displays

Specifications

Model: 8600 Full Extension Drawer Slide

Mounting: Side

Disconnect: Butterfly Lever

Hole Pattern: 32mm and Traditional

Face Frame Mounting: Yes

Type: Ball-Bearing

Travel: Full Extension

Finish: Zinc

Length: 12", 14", 16", 18", 20", 22", 24", 26", 28"

Clearance: .51" + .01" - 0" on each side

Height: 1.98" [50.4mm]

Packaging: Bulk Pack (8600B): all sizes - 5 pair per carton

Action: Telescopic

Slide Configuration: Unhanded

Rating

Load: 150 lb.

Max. Drawer Width: 36"

Slides: 18"

Drawer Width: 36"

Cycles: 50,000 (center pull)

As with all Knap & Vogt drawer slides, the 8600 is designed to meet or exceed ANSI performance standards as established by BIFMA, BHMA and KCMA.


Hardware

#7 x 1/2" Phillips Truss Head

Warranty

Limited Lifetime Warranty


Profile



Clearance

.51" + .01" - 0"
12.9mm + .3mm - 0mm

Charted Information

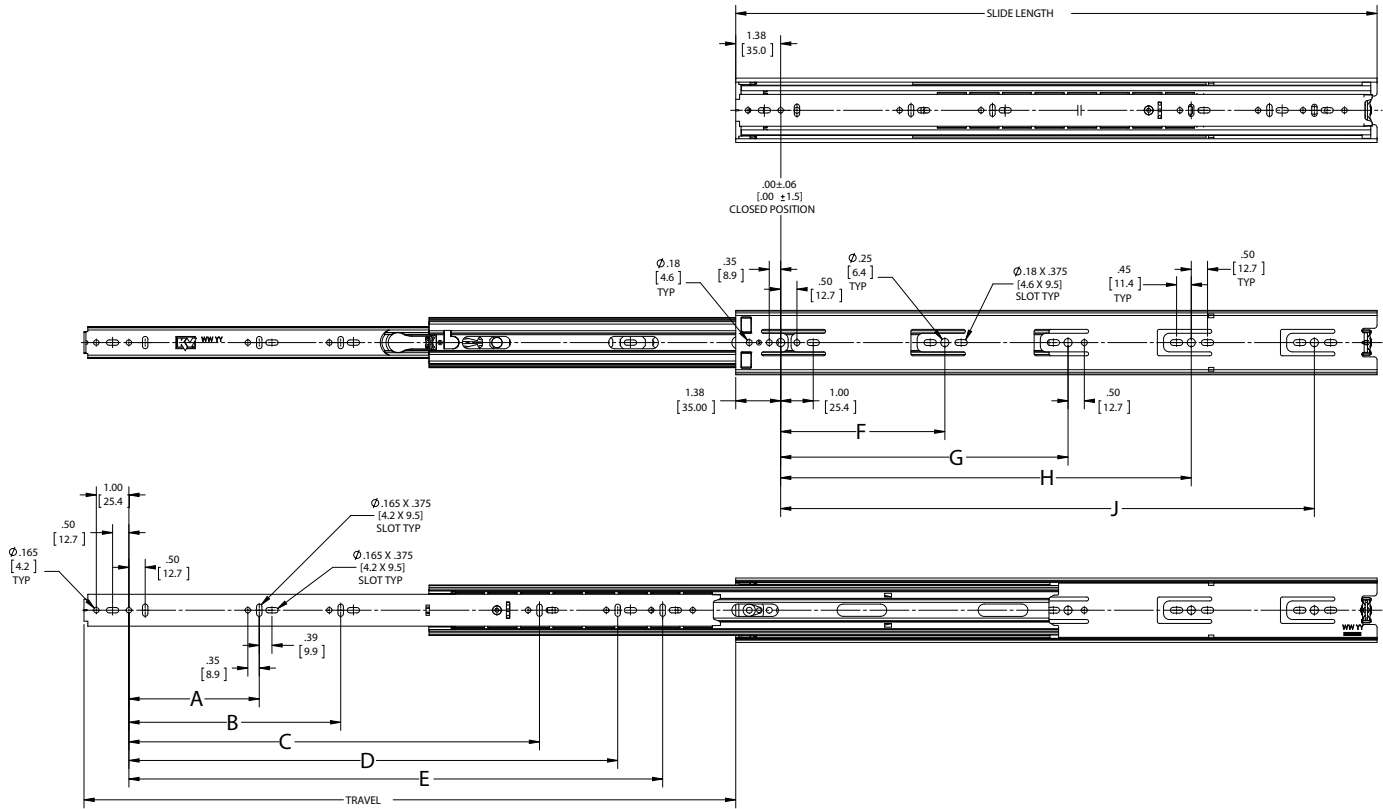

SKU Number	Slide Size inch/mm	Length inch/mm	Travel inch/mm	A inch/mm	B inch/mm	C inch/mm	D inch/mm	E inch/mm	F inch/mm	G Inch/mm	H Inch/mm	I Inch/mm
8600B 12	12" [300mm]	11.81" [300mm]	12" [305mm]	-	-	-	-	8.82" [224mm]	5.04" [128mm]	8.82" [224mm]	-	-
8600B 14	14" [350mm]	13.78" [350mm]	14" [356mm]	5.04" [128mm]	-	-	-	10.08" [256mm]	5.04" [128mm]	8.82" [224mm]	-	-
8600B 16	16" [400mm]	15.75" [400mm]	16" [406mm]	5.04" [128mm]	-	-	-	11.34" [288mm]	5.04" [128mm]	8.82" [224mm]	12.60" [320mm]	-
8600B 18	18" [450mm]	17.72" [450mm]	18" [457mm]	5.04" [128mm]	-	-	-	12.60" [320mm]	5.04" [128mm]	8.82" [224mm]	13.86" [352mm]	-
8600B 20	20" [500mm]	19.69" [500mm]	20" [508mm]	5.04" [128mm]	12.60" [320mm]	-	-	16.38" [416mm]	5.04" [128mm]	8.82" [224mm]	13.86" [352mm]	-
8600B 22	22" [550mm]	21.65" [550mm]	22" [559mm]	5.04" [128mm]	12.60" [320mm]	-	-	16.38" [416mm]	5.04" [128mm]	8.82" [224mm]	13.86" [352mm]	17.64" [448mm]
8600B 24	24" [600mm]	23.62" [600mm]	24" [610mm]	5.04" [128mm]	8.82" [224mm]	16.38" [416mm]	-	20.16" [512mm]	5.04" [128mm]	8.82" [224mm]	13.86" [352mm]	18.90" [480mm]
8600B 26	26" [650mm]	25.59" [650mm]	26" [660mm]	5.04" [128mm]	8.82" [224mm]	16.38" [416mm]	-	20.16" [512mm]	5.04" [128mm]	8.82" [224mm]	13.86" [352mm]	21.42" [544mm]
8600B 28	28" [700mm]	27.56" [700mm]	28" [711mm]	5.04" [128mm]	8.82" [224mm]	16.38" [416mm]	20.16" [512mm]	23.94" [608mm]	5.04" [128mm]	8.82" [224mm]	13.86" [352mm]	21.42" [544mm]



KNAPE & VOGT

2700 Oak Industrial Dr. NE
Grand Rapids, MI 49505-6026 USA
1.800.253.1561 | 616.459.3311
Fax: 877.636.3290
www.kv.com

This and other KV literature is available for download at www.kv.com > Resource Library

Knappe & Vogt reserves the right to change product specifications at any time without notice and without incurring responsibility for existing units.
©2017 Knappe & Vogt. KV and the KV logo are trademarks of Knappe & Vogt.

OL2890/0217