Statement®

KOHLER Faucets

Iconic single-function handshower, 2.5 gpm **K-26286**

Features

- Single-function handshower delivers a full, consistent spray, regardless of water pressure
- Infinity provides three spray experiences in one: strongrinsing (top), massaging (middle), and broad coverage (lower)
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup
- Optimized sprayface for maximum performance
- 2.5 gpm (9.5 lpm) maximum flow rate at 45 psi (3.1 bar)

Material

- Premium material construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Installation

- 1/2 -14 NPT connection
- Requires shower hose (sold separately)
- Bracket or slidebar required for wall-mount installation
- Deck-mount holder required for deck-mount installation

Recommended Products/Accessories

K-9514 60" Shower Hose

K-8593 72" Shower Hose

K-26309 Wall-mount handshower holder

K-26310 Wall-mount handshower holder with supply elbow and check valve

K-26312 32-1/8" slidebar

K-26313 40" slidebar

K-26314 31-1/2" deluxe slidebar with integrated water supply

K-23723 Faucet cleaner



Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|--------------------------|
| | CP | Polished Chrome |
| | BN | Vibrant® Brushed Nickel |
| | BL | Matte Black |
| | 2MB | Vibrant® Brushed Moderne |
| - | | Brass |
| | TT | Vibrant Titanium |



Iconic single-function handshower, 2.5 gpm K-26286

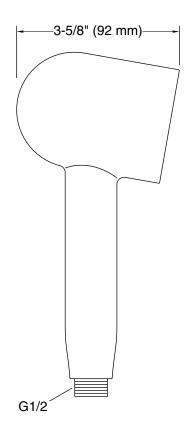

Technical Information


All product dimensions are nominal.

Handshower:

Rated maximum 2.5 gal/min (9.5 l/min)

flow:

Pressure: 45 psi (3.1 bar)

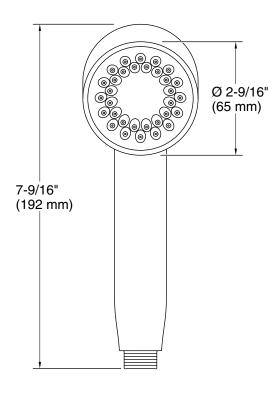

Notes

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less.

