



Irvine™ | K-26068

60" x 32" alcove bath, right drain

Features

- Clean, crisp lines blend into soft angles to create a uniquely sophisticated bath that works with any decor
- Integral lumbar support
- Safeguard® slip-resistant surface provides excellent traction underfoot
- Integral apron creates a clean, finished look
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

0	White
96	Biscuit
NY	Dune
95	Ice Grey
58	Thunder Grey
7	Black Black



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-27-2026 13:0 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

ADA

ASME A112.19.1/CSA B45.2

ASTM F462

ADA

ICC/ANSI A117.1

Technical Information

All product dimensions are nominal.

Drain Location:	Right
Drain Hole Diameter:	2-3/16" (56 mm)
Minimum Flat for Door:	1-1/2" (38 mm)
Basin Area, Bottom:	45-3/4" x 22-1/2" (1162 mm x 572 mm)
Water Depth:	10-15/16" (278 mm)
Water Capacity:	45 gal (170.3 L)
Minimum Floor Load:	57.8 lbs/ft ²
Weight:	322 lbs (146.1 kg)

Material

- KOHLER® enameled cast iron

Recommended Products/Accessories

K-7259 Brass toe tap bath drain


Warranty

See website for detailed warranty information.




KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-27-2026 13:0 - US-CA

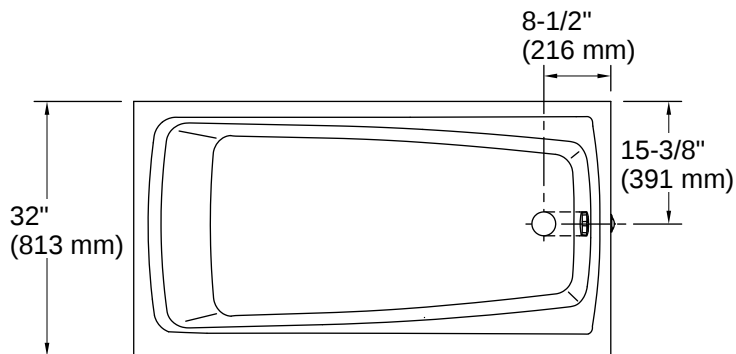

No change in measurements if connected with drain illustrated. (K-7213)

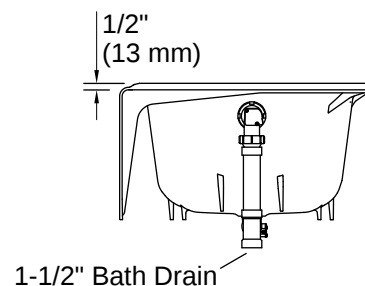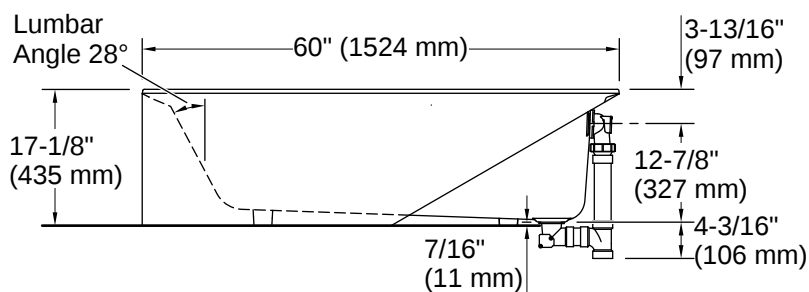

Installation

- Alcove
- Right drain

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

