

## MEMOIRS<sub>®</sub> CLASS FIVE<sub>®</sub>

#### **Features**


- Vitreous china
- Round-front
- 12" (30.5 cm) rough-in
- Class Five<sub>®</sub> flushing system
- 2-1/8" (5.4 cm) glazed trapway
- Combination toilet
- · Less seat and supply
- 1.6 gpf (6 lpf) or 1.28 gpf (4.8 lpf)
- 16-1/2" (41.9 cm) high bowl
- 10-3/4" (27.3 cm) x 8-1/2" (21.6 cm) water area
- 28-3/8" (72.1 cm) x 17-13/16" (45.2 cm) x 31-1/2" (80 cm) (K-3509)
- 28-3/8" (72.1 cm) x 18-7/8" (47.9 cm) x 31-1/8" (79 cm) (K-3511)

#### **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ASME A112.19.2/CSA B45.1
- Energy Policy Act of 1992

# COMFORT HEIGHT™ TOILET K-3509 ALSO K-3511



#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### **Accessories:**

- 0: White
- CP: Polished Chrome
- PB: Vibrant<sub>®</sub> Polished Brass
- Other: Refer to Price Book for additional colors/finishes

#### **Specified Model**

Model	Description			Colors/Finishes				
K-3509	Round front bowl toilet with classic design			0	□ Other			
K-3511	Round front bowl toilet with stately design			0	☐ Other			
Recommended Accessories								
K-4639	Cachet™ Quiet-Close™ round, closed-front toilet seat with cover			□ 0	☐ Other			
K-4662	Lustra™ round, closed-front toilet seat with cover			□0	☐ Other			
K-7637	Angle supply with stop, annealed vertical tube and 3/8" NPT	□ CP	□РВ		☐ Other			

### **Product Specification:**

The round front combination toilet shall be 12" (30.5 cm) rough-in. Toilet shall be made of vitreous china. Toilet shall have 10-3/4'' (27.3 cm) x 8-1/2" (21.6 cm) water area. Toilet shall be at comfort height with a 16-1/2" (41.9 cm) high bowl. Toilet shall be rated at 1.6 gallons (6 L) per flush or 1.28 gallons (4.8 L) per flush with Class Five<sub>TM</sub> flushing system. Toilet shall have 2-1/8" (5.4 cm) glazed trapway and EPDM flapper. Toilet shall be less seat and supply. Toilet shall be Kohler Model K-\_\_\_\_\_\_.

# $\text{MEMOIRS}_{\text{\tiny \it I\!R}} \text{ CLASS FIVE}_{\text{\tiny \it I\!R}}$


#### **Technical Information**

Fixture:	
Configuration	two-piece, round front
Water per flush	1.6 gal (6 L) or 1.28 gal (4.8 L)
Passageway	2-1/8" (5.4 cm)
Water area	10-3/4" (27.3 cm) x 8-1/2" (21.6 cm)
Water depth from rim	6-1/8" (15.6 cm)
Seat post hole centers	5-1/2" (14 cm)

Included components:				
Bowl	K-4289			
Tank with classic design OR	K-4491			
Tank with stately design	K-4492			
Tank cover with classic design OR	1052861			
Tank cover with stately design	1052862			
Trip lever	K-9439			

#### **Installation Notes**

Install this product according to the installation guide.

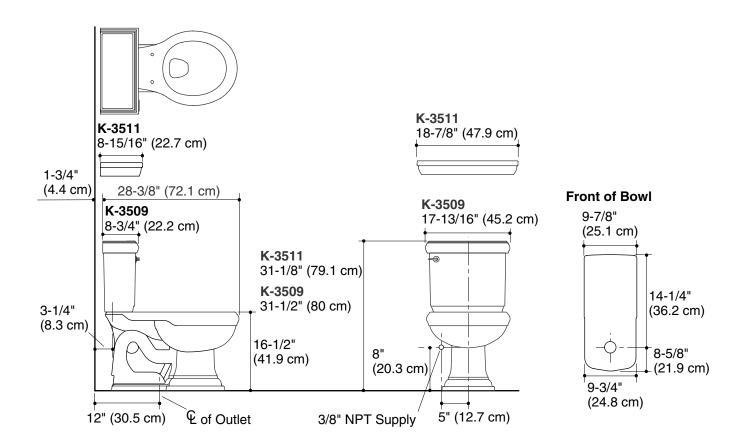

## **Product Diagram**

