# **KOHLER**®

#### Features

- Vitreous china
- 12" (30.5 cm) rough-in
- 2" (5.1 cm) glazed trapway
- Combination toilet
- Ingenium<sub>®</sub> flushing system
- Includes polished chrome trip lever
- Less seat and supply
- Elongated bowl
- 1.6 gpf (6 lpf)
- 16-1/2" (41.9 cm) high bowl is ADA compliant when an open-front seat is installed
- 10-1/8" (25.7 cm) x 9-1/2" (24.1 cm) water area
- 30" (76.2 cm) x 17-1/4" (43.8 cm) x 31" (78.7 cm)

#### **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ADA
- ASME A112.19.2
- Energy Policy Act of 1992
- IAPMO/UPC
- CSA B45.0
- CSA B45.1
- CSA International
- ICC/ANSI A117.1

### **Colors/Finishes**

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories

- AF: Vibrant<sub>®</sub> French Gold
- CP: Polished Chrome
- PB: Vibrant<sub>®</sub> Polished Brass

#### **Specified Model**

Model	Description	Trip Lever	Colors/Finishes		
K-3484	Elongated bowl toilet	left-hand	0 🗆	Other	
Recomme	nded Accessories		·	-	
K-4650	Lustra™ open-front seat for ADA compliance		0 🗆	Other	
K-4701-**	Kathryn <sub>®</sub> toilet seat		0 🗆	Other	
K-7637	Angle supply with stop – 3/8" NPT	□ CP	D PB	Other	
Optional Accessories					
K-9451	Trip lever - non-CP		🗆 AF	Other	

#### **Product Specification**

The elongated toilet combination shall be made of vitreous china. The toilet shall be 30'' (76.2 cm) in length, 17-1/4'' (43.8 cm) in width, and 31'' (78.7 cm) in height with a 10-1/8'' (25.7 cm) x 9-1/2'' (24.1 cm) water area. The toilet shall be 12'' (30.5 cm) rough-in. The toilet shall be 1.6 gpf (6 lpf) with Kohler Ingenium<sup>TM</sup> flushing system. The toilet shall have 2'' (5.1 cm) glazed trapway. The toilet shall include polished chrome trip lever. The toilet shall be ADA compliant with 16-1/2'' (41.9 cm) high bowl when an open-front seat is installed. The toilet shall be less seat and supply. The toilet shall be Kohler Model K-3484-\_\_\_\_\_.



**KATHRYN**<sub>®</sub>

K-3484

**ADA** 

**COMFORT HEIGHT<sup>TM</sup> TOILET** 


## KATHRYN<sub>®</sub>

#### **Technical Information**

Fixture:					
Configuration	two-piece, elongated				
Water per flush	1.6 gal (6 L)				
Passageway	2″ (5.1 cm)				
Water area	10-1/8" (25.7 cm) x 9-1/2" (24.1 cm)				
Water depth from rim	5-7/8" (14.9 cm)				
Seat post hole centers	5-1/2" (14 cm)				
Included components:					
Bowl	K-4258				
Tank	K-4403				
Tank cover	1015781				
Trip lever	1006495				
Bolt cap accessory pack	1013092				

#### **Installation Notes**

Install this product according to the installation guide.

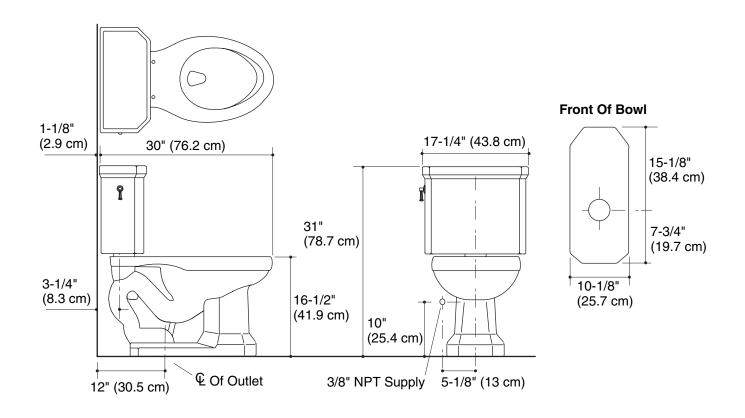

**Product Diagram** 

